



Automation Control Equipment

# Damping Technology

ACE: Your partner for industrial shock absorbers,  
gas springs and vibration control


Main Catalog 2018  
North America



Imperial  
Dimensions

**Complete Product Range  
Data Sheets & Catalogs  
CAD Database  
Free Calculation Programs  
Distributors  
Services  
News  
etc.**

**[www.acecontrols.com](http://www.acecontrols.com)**

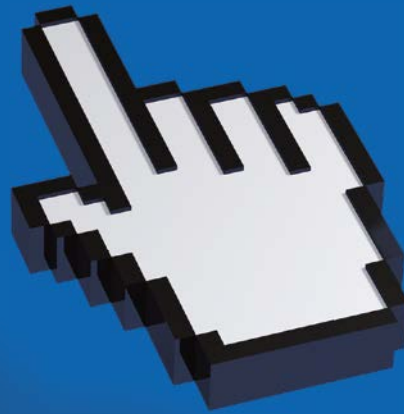

## Dear customer,

You have made the right decision.

You will find over 280 pages of comprehensive information on the application fields of automation control (single direction of movement, i.e. deceleration), motion control (bidirectional movement, i.e. gas springs and dampers), vibration control and safety products. Each section is marked with a different color. This integrated concept is reflected in all documentation and on our [www.acecontrols.com](http://www.acecontrols.com) website. We also offer an ACE YouTube channel, extensive CAD library and calculation aids.

Innovations can as usual be found in the table of contents and on the individual catalogue pages.

ACE products assist you in making your production and processes faster, more efficient, quieter, easier, safer and more sustainable – underpinned by ACE product quality and our 5-star service.

**Yours,**  
Jürgen Roland (Managing Director)



### Free Application & Engineering Support

Tell us about your requirements and take advantage of our more than 50 years of expert knowledge in damping technology. Our specialists in engineering discuss your requirements with you and demonstrate our capabilities. Take advantage of our service hotline:

**1-800-521-3320**

Our regional managers are genuine product specialists. They will visit you onsite and work out customized solutions for you.

ACE service support and products are available in more than 40 countries worldwide.

### Online Calculation Program & CAD Database

With our user-friendly calculation program, you can select the right product – online or via download. The CAD data is available in all standard formats in 2D and 3D.

[www.acecontrols.com](http://www.acecontrols.com)

Our specialist engineers create detailed technical solutions for you including assembly suggestions and details on machine loads, brake time and workload etc.

# Automation Control

# Motion Control

# Vibration Control

# Safety Products



## Certified Quality

ACE products are exclusively manufactured from high quality and environmentally friendly materials. With constant quality monitoring and performance testing, we guarantee the highest quality products.

ACE pursues continual improvement throughout the production process in order to reduce material and energy consumption, the production of damaging substances and works to recycle or dispose of end products as gently as possible.

It is important to us to keep the strain on the environment as low as possible and simultaneously improve our services.

With ongoing optimization of our products, we strive to provide our customers with well designed products which are smaller, more effective and energy saving.



Miniature Shock Absorbers, Industrial Shock Absorbers, Heavy Industrial Shock Absorbers, Profile Dampers, Damping Pads



Industrial Gas Springs (push type), Industrial Gas Springs (pull type), Hydraulic Dampers, Hydraulic Feed Controls, Rotary Dampers



Rubber-Metal Isolators, Vibration-Isolating Pads, Low Frequency Pneumatic Leveling Mounts



Safety Shock Absorbers, Safety Dampers, Clamping Elements

## We are your Specialists for Industrial Damping Technology

**ACE is the world's globally recognized specialist in the field of industrial damping technology – with agencies in 45 countries on all continents. ACE was founded in Farmington Hills, Michigan in 1962.**

ACE customers benefit from sophisticated solutions, valuable innovations and exemplary service around the topic of damping technology. Through close cooperation with leading engineering companies, ACE has established itself as a pioneer in the field of technical progress in damping technology.

This catalog is our attempt to provide a comprehensive service, including all the information you need to find solutions to your damping technology and vibration isolation challenges.

ACE develops, produces and sells a wide range of damping products. It comprises industrial and safety shock absorbers, profile dampers, rotary dampers, industrial gas springs, hydraulic dampers, vibration isolators, air springs and hydraulic feed controls.

Our advanced products are designed and engineered to help forward-thinking companies quickly, gently and precisely slow down moving masses or to isolate harmful vibrations.

# ACE Product Variety

Concentrated knowledge on more than 280 pages



Page

## 6

## Automation Control

8 - 9

Industrial shock absorbers – general information

10 - 13

Formulas and calculations

14 - 15

Industrial shock absorbers – capacity chart

### 16

### Miniature Shock absorbers

#### Product families

18 - 39

Accessories M5 to M25 – selection chart

40 - 41

Accessories 3/8-32 UNF to 1-12 UNF – selection chart

42 - 43

Accessories M5 to M25 – overview

44 - 47

Accessories 3/8-32 UNF to 1-12 UNF – overview

48 - 49

Accessories – technical information

50 - 51

Application examples

52 - 53

### 54

### Industrial Shock Absorbers

#### Product families

56 - 88

Accessories M33 to M64 – overview

90 - 92

Accessories 1-1/4-12 UNF to 2-1/2-12 UNF – overview

93 - 95

Accessories – technical information

96

97 - 99

Application examples

### 100

### Heavy Industrial Shock Absorbers

#### Product families

102 - 109

Special accessories – air/oil tanks

110 - 111

### 112

### Profile Dampers – TUBUS

114

Profile dampers – capacity chart

116 - 127

#### Product families

128 - 129

Application examples

### 130

### Special Profile Dampers – TUBUS

### 132

### Damping Pads – SLAB

#### Product families

134 - 140

Adhesive recommendation and technical information

141

Chemical resistance

142

Sample pads

143


144 - 145

Application examples

<b>146</b>	<b>Motion Control</b>
<b>148</b>	<b>Gas Springs – Push Type</b>
150 - 171	<b>Product families</b>
169	Additional stainless steel gas springs – capacity chart
172 - 173	Application examples
<b>174</b>	<b>Gas Springs – Pull Type</b>
176 - 186	<b>Product families</b>
187	Additional stainless steel gas springs – capacity chart
188 - 189	Gas spring calculation service and fax form
190	Mounting and safety instructions
191	Special accessories – valve actuation and refilling kit
<b>192</b>	<b>Hydraulic Dampers</b>
194 - 208	<b>Product families</b>
210 - 211	Application examples
212 - 225	Accessories for gas springs and hydraulic dampers
<b>226</b>	<b>Hydraulic Feed Controls</b>
228 - 231	<b>Product families</b>
<b>232</b>	<b>Rotary Dampers</b>
236 - 249	<b>Product families</b>
250	Calculations and accessories
251	Application examples
<b>252</b>	<b>Vibration Control</b>
254	Vibration isolation
<b>255</b>	<b>Rubber-Metal Isolators</b>
<b>256</b>	<b>Vibration-Isolating Pads</b>
<b>257</b>	<b>Low Frequency Pneumatic Leveling Mounts</b>
<b>258</b>	<b>Safety Products</b>
<b>260</b>	<b>Safety Shock Absorbers</b>
262 - 273	<b>Product families</b>
274	General instructions
275	Formulas and calculations
276 - 277	Application examples
<b>278</b>	<b>Safety Dampers – TUBUS</b>
280 - 281	<b>Product families</b>
<b>282</b>	<b>Clamping Elements</b>
284 - 286	Clamp versions
288 - 289	Application examples

# Automation Control

Miniature Shock Absorbers, Industrial Shock Absorbers  
Heavy Industrial Shock Absorbers, Profile Dampers  
Damping Pads

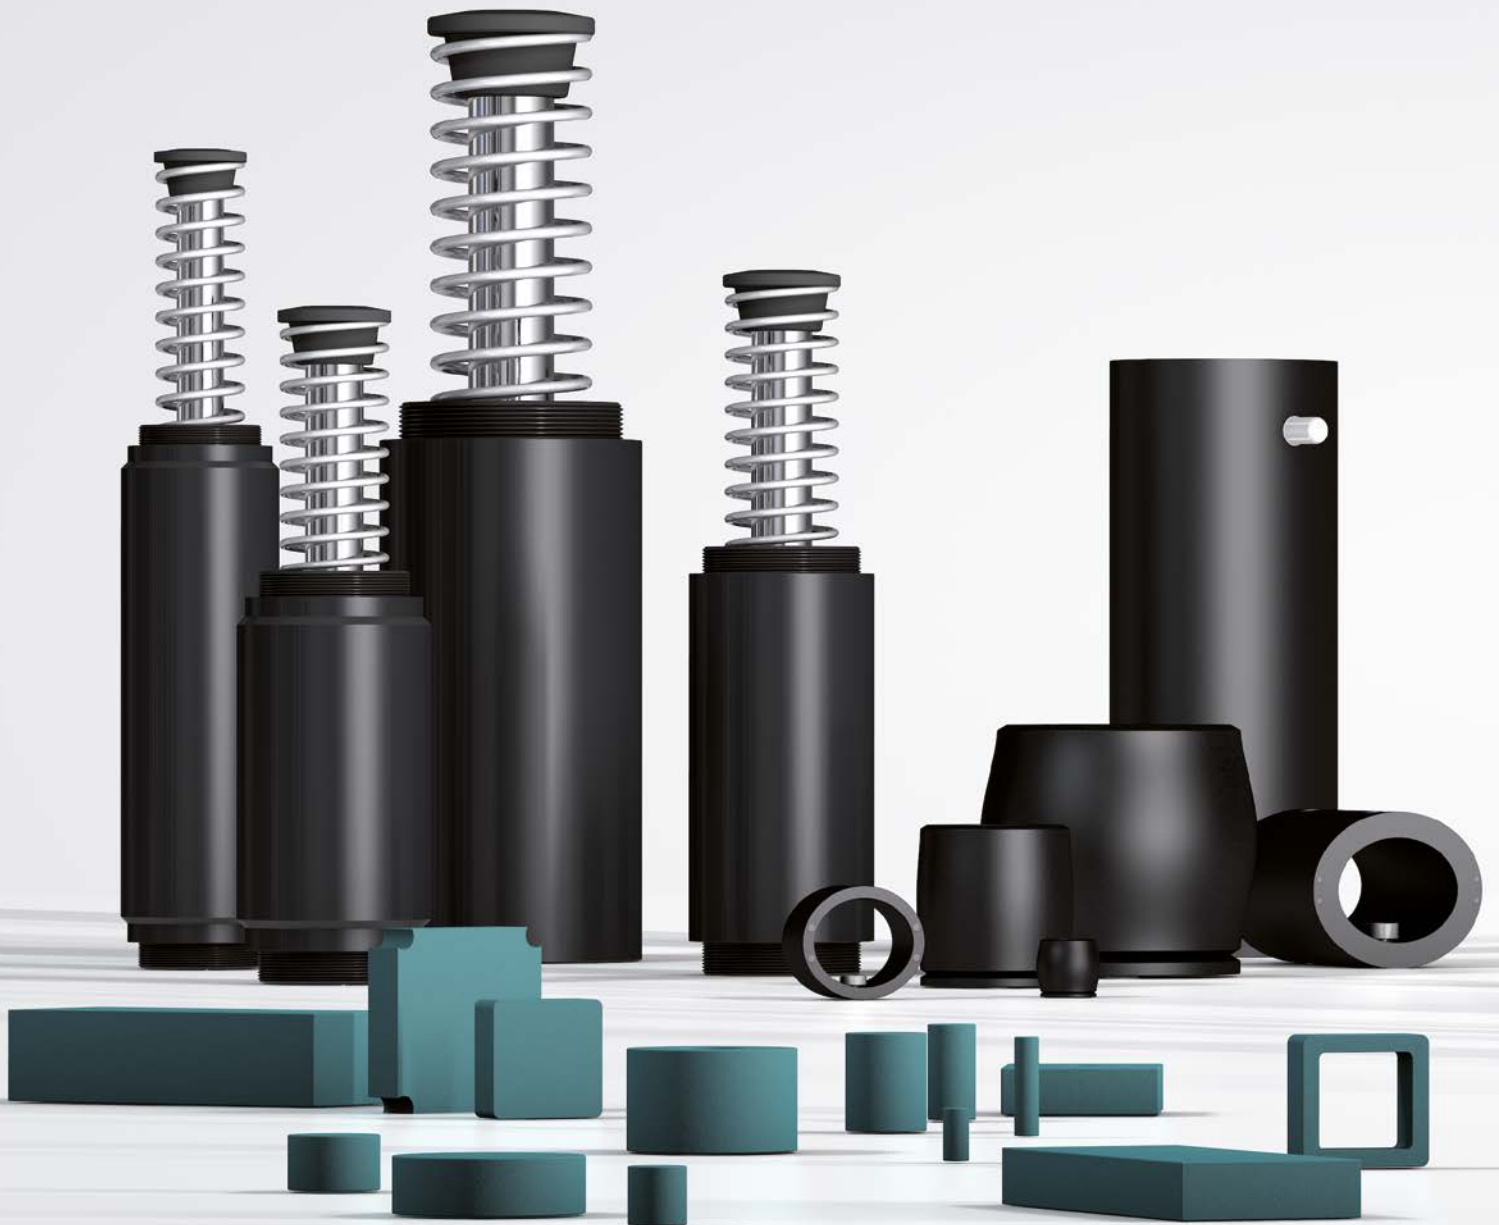



## Optimum Customization

### Tailor-made solutions for any application

**ACE universal damping solutions convert kinetic energy in to heat. This makes machines faster, quieter, more durable, lighter and therefore more competitive and profitable.**

Here you will find the perfect selection of machine elements, which turn damaging forces into harmless heat. These solutions from ACE smoothly decelerate moving loads. This involves the lowest possible stress on machines, which makes the damping products from ACE so valuable.



# Industrial Shock Absorbers


## Standard-setting damping solutions

The name says it all. ACE is considered the technology and market leader worldwide for small, medium-sized and heavy industrial shock absorbers is a result of the successful blend of quality, performance and the durability of the solutions.

ACE provides the right shock absorber for every industrial application. Over 200 different models are available, from the smallest model with a 0.16 inch stroke up to the biggest with 16 inches.


Whether self-compensating or adjustable, with ACE dampers between 6 in-lb/cycle and 1,120,000 in-lb/cycle can be absorbed and effective weights between 1.10 lbs and 225 tons can be decelerated with great precision.

In addition, ACE damping solutions impress with knowledgeable consulting, exemplary service and ideal matching accessories.



ACE demo showing a wine glass dropping free fall 0.05 inch. Decelerated by a shock absorber, not a drop of wine is spilled.


### Stopping with Industrial Shock Absorbers

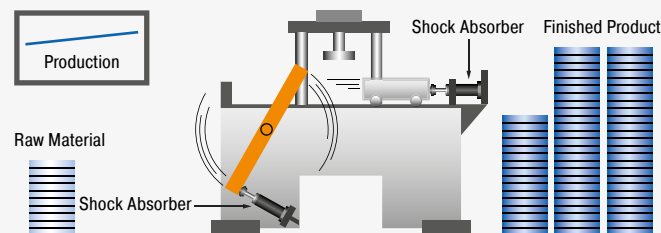

#### Advantages of using industrial shock absorbers

- Safe, reliable production
- Long service life of the machines
- Easy, inexpensive construction
- Low operating costs
- Quiet, economical machines
- Less stress on the machine
- Profit improvement

### Stopping with Rubber Buffers, Springs, Dashpots or Cylinder Cushions

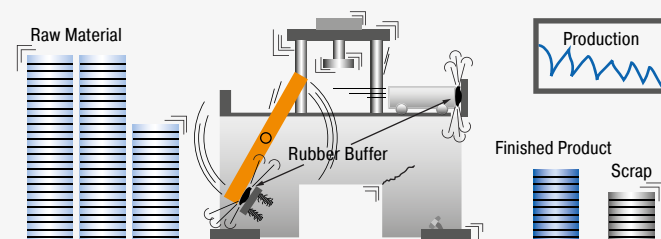

#### Results using conventional dampers

- Loss of production
- Machine damage
- Increased maintenance costs
- Increased operating noise
- Higher machine construction costs

## Comparison of Different Damping Elements

When it comes to slowing down moving masses with constant damping force through the stroke, the industrial shock absorber is the right choice. A comparison demonstrates the differences of the damping elements.

### ACE Industrial Shock Absorbers (Uniform stopping force through the entire stroke)

The moving load is smoothly and gently brought to rest by a constant resisting force throughout the entire shock absorber stroke. The load is decelerated with the lowest possible force in the shortest possible time eliminating damaging force peaks and shock damage to machines and equipment. This is a linear deceleration force stroke curve and is the curve provided by ACE industrial shock absorbers. In addition they considerably reduce noise pollution.

### Hydraulic Dashpot (High stopping force at start of the stroke)


With only one metering orifice the moving load is abruptly slowed down at the start of the stroke. The braking force rises to a very high peak at the start of the stroke (giving high shock loads) and then falls away rapidly.

### Springs and Rubber Buffers (High stopping forces at end of stroke)

At full compression. Also they store energy rather than dissipating it, causing the load to rebound back again.

### Air Buffers, Pneumatic Cylinder Cushions (High stopping force at end of stroke)

Due to the compressibility of air these have a sharply rising force characteristic towards the end of the stroke. The majority of the energy is absorbed near the end of the stroke.

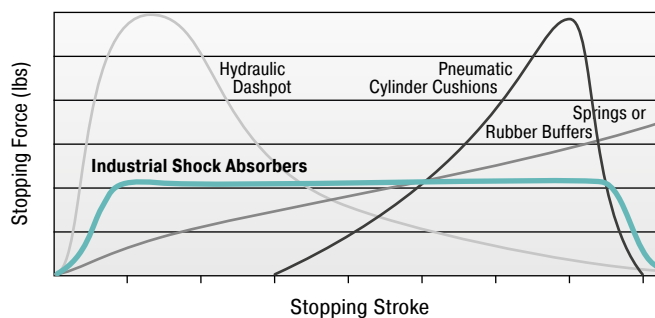


#### Comparison


The comparison shows the differences of the damping in a direct comparison of stopping force to stopping stroke.

## Function of the Pressure Chamber

If a moving mass hits the industrial shock absorber, the piston puts the oil in the pressure chamber into motion. The oil is pressed through the metering orifices, which converts the discharged energy into heat. The metering orifices are arranged on the stroke so that the mass is dulled with a constant damping force. The hydraulic pressure is maintained throughout the entire braking process nearly constant.

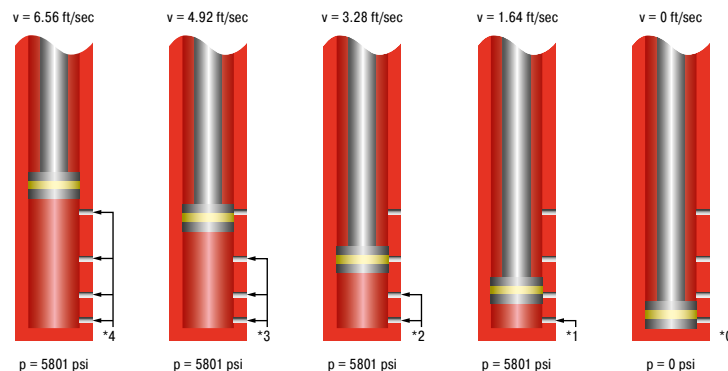

\* The load velocity reduces continuously as you travel through the stroke due to the reduction in the number of metering orifices (\*) in action. The internal pressure remains essentially constant and thus the force vs. stroke curve remains linear.

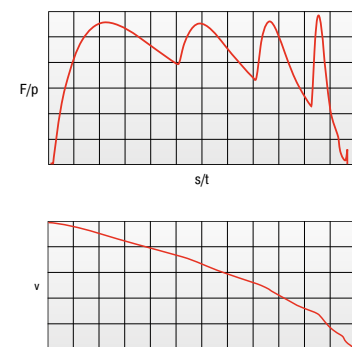

F = force (lbs), p = internal pressure (psi)  
s = stroke (in), t = deceleration time (s),  
v = velocity (ft/s)

## Calculation Data for the Design of Industrial Shock Absorbers

ACE shock absorbers provide linear deceleration and are therefore superior to other kinds of damping elements. It is easy to calculate around 90 % of applications knowing only the following five parameters:

- |   |                      |               |
|---|----------------------|---------------|
| <b>1. Weight to be decelerated (weight)</b> | <b>W</b>             | <b>[lbs]</b>  |
| <b>2. Impact velocity at shock absorber</b> | <b>v<sub>D</sub></b> | <b>[ft/s]</b> |
| <b>3. Propelling force</b>                  | <b>F</b>             | <b>[lbs]</b>  |
| <b>4. Cycles per hour</b>                   | <b>c</b>             | <b>[/hr]</b>  |
| <b>5. Number of absorbers in parallel</b>   | <b>n</b>             |               |

### Key to symbols used

E <sub>1</sub>	Kinetic energy per cycle	in-lbs	<sup>3</sup> ST	Tall torque factor (normally 2.5)	1 to 3
E <sub>2</sub>	Propelling force energy per cycle	in-lbs	T	Propelling torque	in-lbs
E <sub>3</sub>	Total energy per cycle (E <sub>1</sub> + E <sub>2</sub> )	in-lbs	I	Moment of Inertia	lb-ft-s <sup>2</sup>
<sup>1</sup> E <sub>4</sub>	Total energy per hour (E <sub>3</sub> · c)	in-lbs/hr	g	Acceleration due to gravity = 9.81	ft/s <sup>2</sup>
We	Effective weight	lbs	H	Drop height excl. shock absorber stroke	in
W	Weight to be decelerated	lbs	s	Shock absorber stroke	in
n	Number of shock absorbers (in parallel)		L/R/r	Radius	in
<sup>2</sup> v	Velocity at impact	ft/s	Q	Reaction force	lbs
<sup>2</sup> v <sub>D</sub>	Impact velocity at shock absorber	ft/s	μ	Coefficient of friction	
ω	Angular velocity at impact	rad/s	t	Deceleration time	s
F	Propelling force	lbs	a	Deceleration	ft/s <sup>2</sup>
c	Cycles per hour	1/hr	α	Side load angle	°
P	Motor power	hp	β	Angle of incline	°

<sup>1</sup> All mentioned values of E<sub>4</sub> in the capacity charts are only valid for room temperature. There are reduced values at higher temperature ranges.

<sup>2</sup> v or v<sub>D</sub> is the final impact velocity of the mass. With accelerating motion the final impact velocity can be 1.5 to 2 times higher than the average. Please take this into account when calculating kinetic energy.

<sup>3</sup> ST ≙ relation between starting torque and running torque of the motor (depending on the design)

**In all the following examples the choice of shock absorbers made from the capacity chart is based upon the values of (E<sub>3</sub>), (E<sub>4</sub>), (We) and the desired shock absorber stroke (s).**

### Note:







**When using several shock absorbers in parallel, the values (E<sub>3</sub>), (E<sub>4</sub>) and (We) are divided according to the number of units used.**

$$\text{Reaction force } Q \text{ [lbs]} \quad Q = \frac{1.5 \cdot E_3}{s}$$

$$\text{Stopping time } t \text{ [s]} \quad t = \frac{2.6 \cdot s}{v_D}$$

$$\text{Deceleration rate } a \text{ [ft/s}^2\text{]} \quad a = \frac{9 \cdot v_D^2}{s}$$

Approximate values assuming correct adjustment. Add safety margin if necessary.  
(Exact values will depend upon actual application data and can be provided on request.)

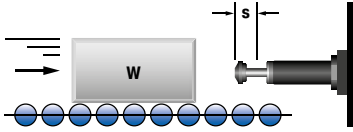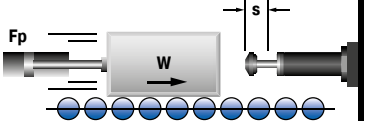
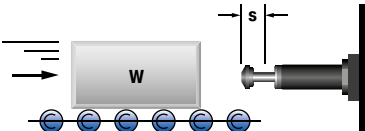


Application	Formula	Example
<b>1 Weight without propelling force</b> 	$E_1 = 0.186 \cdot W \cdot v^2$ $E_2 = F \cdot s$ $E_3 = E_1 + E_2$ $E_4 = E_3 \cdot c$ $We = \frac{E_3}{0.186 \cdot v^2}$	$W = 500$ lbs $v = 3$ ft/s $F_p = 0$ lbs $s = 1$ in (chosen) $c = 500$ /hr  $E_1 = 0.186 \cdot 500 \cdot 3^2 = 837$ in-lb $E_2 = 0 \cdot 1 = 0$ in-lb $E_3 = 837 + 0 = 837$ in-lb $E_4 = 837 \cdot 500 = 418500$ in-lb/hr $We = \frac{837}{0.186 \cdot 3^2} = 500$ lbs  Chosen from capacity chart: Model MC3325-3 self-compensating or MA3325 adjustable
<b>2 Weight with propelling force</b> 	$E_1 = 0.186 \cdot W \cdot v^2$ $E_2 = F \cdot s$ $E_3 = E_1 + E_2$ $E_4 = E_3 \cdot c$ $We = \frac{E_3}{0.186 \cdot v^2}$	$W = 14$ lb $v = 2.2$ ft/s $F = 30$ lbs $s = 0.4$ in (chosen) $c = 100$ /hr  $E_1 = 0.186 \cdot 14 \cdot 2.2^2 = 12.6$ in-lb $E_2 = 30 \cdot 0.4 = 12$ in-lb $E_3 = 12.6 + 12 = 24.6$ in-lb $E_4 = 24.6 \cdot 100 = 2460$ in-lb/hr $We = \frac{24.6}{0.186 \cdot 2.2^2} = 27.3$ lbs  Chosen from capacity chart: Model MC75-3 self-compensating <small><sup>1</sup> v is the final impact velocity of the mass: With pneumatically propelled systems this can be 1.5 to 2 times the average velocity. Please take this into account when calculating energy.</small>
<b>2.1 for vertical motion upwards</b> → <b>2.2 for vertical motion downwards</b> →	$E_2 = (F - W) \cdot s$ $E_2 = (F + W) \cdot s$	
<b>3 Weight with motor drive</b> 	$F = \frac{ST \cdot Hp}{v}$ $E_1 = 55 \cdot W \cdot v^2$ $E_2 = F \cdot s$ $E_3 = E_1 + E_2$ $E_4 = E_3 \cdot c$ $We = \frac{E_3}{0.186 \cdot v^2}$	$W = 2100$ lbs $v = 1$ ft/s $Hp = 2$ hp $ST = 2.5$ $s = 2$ in (chosen) $c = 20$ /hr  $F = \frac{550 \cdot 2.5 \cdot 2}{1} = 2750$ lbs $E_1 = 0.186 \cdot 2100 \cdot 1^2 = 390.6$ in-lb $E_2 = 2750 \cdot 2 = 5500$ in-lb $E_3 = 390.6 + 5500 = 5890.6$ in-lb $E_4 = 5890.6 \cdot 20 = 117812$ lbs $We = \frac{5890.6}{0.186 \cdot 1^2} = 31670$ lbs  Chosen from capacity chart: Model ML6450 or MC6450-4 self-compensating Note: Do not forget to include the rotational energy of motor, coupling and gearbox into calculation for $E_1$ .
<b>4 Weight on driven rollers</b> 	$F = W \cdot \mu$ $E_1 = 0.186 \cdot W \cdot v^2$ $E_2 = F \cdot s$ $E_3 = E_1 + E_2$ $E_4 = E_3 \cdot c$ $We = \frac{E_3}{0.186 \cdot v^2}$	$W = 250$ lbs $v = 2.5$ ft/s $\mu = 0.2$ in $s = 1$ in (chosen) $c = 180$ /hr  $F = 250 \cdot 0.2 = 50$ lbs $E_1 = 0.186 \cdot 250 \cdot 2.5^2 = 290.6$ in-lb $E_2 = 50 \cdot 1 = 50$ in-lb $E_3 = 290.6 + 50 = 340.6$ in-lb $E_4 = 340.6 \cdot 180 = 61308$ in-lb/hr $We = \frac{340.6}{0.186 \cdot 2.5^2} = 293$ lbs  Chosen from capacity chart: Model MA600 adjustable or SC650-3 self-compensating
<b>5 Swinging weight with propelling force</b> 	$E_1 = 0.186 \cdot W \cdot v^2$ $= 0.186 \cdot l \cdot \omega^2$ $E_2 = \frac{T \cdot s}{R}$ $E_3 = E_1 + E_2$ $E_4 = E_3 \cdot c$ $v_D = \frac{v \cdot R}{L} = \omega \cdot R$ $We = \frac{E_3}{0.186 \cdot v_D^2}$	$W = 20$ lbs $v = 12$ ft/s $T = 50$ in-lb $R = 12$ in $L = 16$ in $s = 0.5$ in (chosen) $c = 700$ /hr  $E_1 = 0.186 \cdot 20 \cdot 12^2 = 536$ in-lb $E_2 = \frac{50 \cdot 0.50}{12} = 2.1$ in-lb $E_3 = 536 + 2.1 = 538.1$ in-lb $E_4 = 538.1 \cdot 700 = 376670$ in-lb/hr $v_D = \frac{12 \cdot 12}{16} = 9$ ft/s $We = \frac{5385.1}{0.186 \cdot 9^2} = 35.7$ lbs  Chosen from capacity chart: Model MC600 self-compensating <small>Check the side load angle, <math>\tan \alpha = s/R</math>, with regard to "Max. Side Load Angle" in the capacity chart (see example 6.2)</small>
<b>6 Free falling weight</b> 	$v_D = \sqrt{5.4 \cdot D}$ $E_1 = 0.186 \cdot W \cdot v^2$ $E_2 = F \cdot s$ $E_3 = E_1 + E_2$ $E_4 = E_3 \cdot c$ $We = \frac{E_3}{0.186 \cdot v^2}$ $F = W$	$W = 200$ lbs $D = 15$ in $s = 3$ in (chosen) $c = 60$ /hr  $v = \sqrt{5.4 \cdot 15} = 9$ ft/s $E_1 = 0.186 \cdot 200 \cdot 9^2 = 3013.2$ in-lb $E_2 = 200 \cdot 3 = 600$ in-lb $E_3 = 3013.2 + 600 = 3613.2$ in-lb $E_4 = 3613.2 \cdot 60 = 216792$ in-lb/hr $We = \frac{3613.2}{0.186 \cdot 9^2} = 239.8$ lbs  Chosen from capacity chart: Model MA4575 adjustable

Application	Formula	Example
<p><b>6.1 Weight rolling/sliding down incline</b></p> <p>6.1a propelling force up incline → 6.1b propelling force down incline →</p>	$E_1 = 0.186 \cdot W \cdot (\sqrt{5.4 \cdot H})^2$ $= 0.186 \cdot W \cdot v_D^2$ $E_2 = (W \cdot \sin(B)) \cdot s$ $E_3 = E_1 + E_2$ $E_4 = E_3 \cdot c$ $v_D = \sqrt{5.4 \cdot D}$ $We = \frac{E_3}{0.186 \cdot v_D^2}$	<p>W = 1100 lbs H = 4 in c = 200 /hr B = 10 °</p> <p><math>E_1 = 0.186 \cdot 1100 \cdot (\sqrt{5.4 \cdot 4})^2 = 4418.4</math> in-lb <math>E_2 = (1100 \cdot \sin(10)) \cdot 2.91 = 555.8</math> in-lb <math>E_3 = 4418.4 + 555.8 = 4975.2</math> in-lb <math>E_4 = 4975.2 \cdot 200 = 995040</math> in-lb/hr</p> <p>Chosen from capacity chart: Model MC4575-2 self-compensating</p>
<p><b>6.2 Weight free falling about a pivot point</b></p> <p><math>\tan \alpha = \frac{s}{R}</math></p>	$E_1 = 0.186 \cdot W \cdot (\sqrt{5.4 \cdot H})^2$ $= 0.186 \cdot W \cdot v_D^2$ $E_2 = 0$ $E_3 = E_1 + E_2$ $E_4 = E_3 \cdot c$ $v_D = (\sqrt{5.4 \cdot H}) \cdot R \cdot L$ $We = \frac{E_3}{0.186 \cdot v_D^2}$	<p>W = 120 lbs H = 40 in c = 50 /hr R = 12 in L = 20 in</p> <p><math>E_1 = 0.186 \cdot 120 \cdot (\sqrt{5.4 \cdot 40})^2 = 4821.1</math> in-lb <math>E_2 = 0 = 0</math> in-lb <math>E_3 = 4821.1 + 0 = 4821.1</math> in-lb <math>E_4 = 4821.1 \cdot 50 = 241055</math> in-lb/hr</p> <p>Chosen from capacity chart: Model MC4550-1 self-compensating Check the side load angle, <math>\tan \alpha = s/R</math>, with regard to "Max. Side Load Angle" in the capacity chart</p>
<p><b>7 Rotary index table with propelling torque</b></p>	$E_1 = 0.186 \cdot W_3 \cdot v_s^2$ $E_2 = F \cdot s$ $E_3 = E_1 + E_2$ $E_4 = E_3 \cdot c$ $v_D = \frac{v_s \cdot R}{L} = \omega \cdot R$ $We = \frac{E_3}{0.186 \cdot v^2}$ $W_a = \frac{W \cdot L^2}{2 \cdot R^2}$ $V = R \cdot \omega$ $F = T/R$	<p>W = 195 lbs L = 20 in <math>v_s = 1.85</math> ft/s T = 1700 in-lb R = 15 in c = 60 /hr s = 0.75 in (chosen)</p> <p><math>W_a = \frac{195 \cdot 20^2}{2 \cdot 15^2} = 173.3</math> lbs F = <math>\frac{1700}{15} = 113.3</math> lbs <math>E_1 = 0.186 \cdot 173.3 \cdot 1.85^2 = 110.3</math> in-lb <math>E_2 = 113.3 \cdot 0.75 = 85</math> in-lb <math>E_3 = 110.3 + 85 = 195.3</math> in-lb <math>E_4 = 195.3 \cdot 60 = 11718</math> in-lb/hr <math>We = \frac{195.3}{0.186 \cdot 1.85^2} = 306.8</math> lbs</p> <p>Chosen from capacity chart: Model SC300-4 or MC225H self-compensating Check the side load angle, <math>\tan \alpha = s/R_s</math>, with regard to "Max. Side Load Angle" in the capacity chart (see example 6.2)</p>
<p><b>8 Swinging arm with propelling torque (uniform weight distribution)</b></p>	$E_1 = 0.063 \cdot W \cdot v^2$ $= 6 \cdot I \cdot (\omega^2 \cdot 0.01745)^2$ $E_2 = \frac{T \cdot s}{R}$ $E_3 = E_1 + E_2$ $E_4 = E_3 \cdot c$ $v_D = \frac{v \cdot R}{L} = \frac{\omega \cdot R}{688}$ $We = \frac{E_3}{0.186 \cdot v_D^2}$	<p>I = 3.895 lb-ft-sec<sup>2</sup> <math>\omega = 70</math> */s T = 15000 in-lb s = 1 in (chosen) L = 19 in R = 12 in c = 500 /hr</p> <p><math>E_1 = 6 \cdot 3.895 (70 \cdot 0.01745)^2 = 34.86</math> in-lb <math>E_2 = 15000 \cdot 1/12 = 1250</math> in-lb <math>E_3 = 34.86 + 1250 = 1284.86</math> in-lb <math>E_4 = 1284.86 \cdot 500 = 642430</math> in-lb/hr <math>v_D = \frac{12 \cdot 70}{688} = 1.22</math> ft/s <math>We = \frac{1284.86}{0.186 \cdot 1.22^2} = 4641.1</math> lb</p> <p>Chosen from capacity chart: Model MC4525-4 self-compensating or MA4525 adjustable *Check the side load angle, <math>\tan \alpha = s/R</math>, with regard to "Max. Side Load Angle" in the capacity chart (see example 6.2)</p>
<p><b>9 Swinging arm with propelling force (uniform weight distribution)</b></p>	$E_1 = 0.063 \cdot W \cdot v^2$ $= 6 \cdot I \cdot (\omega \cdot 0.01745)^2$ $E_2 = \frac{F \cdot r \cdot s}{R_s} = \frac{T \cdot s}{R_s}$ $E_3 = E_1 + E_2$ $E_4 = E_3 \cdot c$ $v_D = \frac{v \cdot R_s}{L} = \frac{\omega}{688}$ $We = \frac{E_3}{0.186 \cdot v_D^2}$ $T = F \cdot R_1$	<p>W = 500 lbs v = 2 m/s F = 7000 N T = 4200 Nm s = 0.050 m (chosen) r = 0.6 m R = 0.8 m L = 1.2 m c = 900 /hr</p> <p><math>E_1 = 0.063 \cdot 500 \cdot 6^2 = 1134</math> in-lb T = <math>1600 \cdot 32 = 51200</math> in-lb <math>E_2 = \frac{51200 \cdot 1.91}{24} = 4075</math> in-lb <math>E_3 = 1134 + 4075 = 5209</math> in-lb <math>E_4 = 5209 \cdot 90 = 468810</math> in-lb/hr <math>v_D = \frac{6 \cdot 24}{48} = 3</math> ft/s <math>We = \frac{5209}{0.186 \cdot 3^2} = 3112</math> lbs</p> <p>Chosen from capacity chart: Model MC4550-4 self-compensating</p>
<p><b>10 Weight lowered at controlled speed</b></p>	$E_1 = 0.186 \cdot W \cdot v^2$ $E_2 = F \cdot s$ $E_3 = E_1 + E_2$ $E_4 = E_3 \cdot c$ $v_D = v$ $We = \frac{E_3}{0.186 \cdot v_D^2}$ $F = W$	<p>W = 1000 lbs v = 3 ft/s s = 0.91 in (chosen) c = 90 /hr</p> <p><math>E_1 = 0.186 \cdot 1000 \cdot 3^2 = 1674</math> in-lb F = 1000 lbs <math>E_2 = 1000 \cdot 0.91 = 910</math> in-lbs <math>E_3 = 1674 + 910 = 2584</math> in-lbs <math>E_4 = 2584 \cdot 60 = 155040</math> in-lb/hr <math>We = \frac{2584}{0.186 \cdot 3^2} = 1543</math> lbs</p> <p>Chosen from capacity chart: Model MC4525-3 self-compensating</p>

Issue 04.2018 – Specifications subject to change

### Effective Weight (We)

The effective weight (We) can either be the same as the actual weight (examples A and C), or it can be an imaginary weight representing a combination of the propelling force or lever action plus the actual weight (examples B and D).

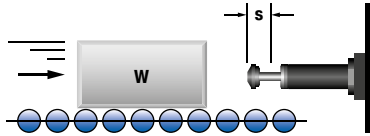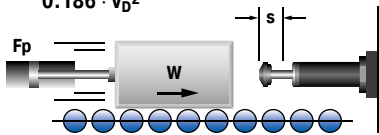Application	Example
<p><b>A Weight without propelling force</b></p> <p>Formula  <math>We = W</math></p> 	<p><b>W = 100 lbs</b>  <math>v_D = v = 2 \text{ ft/s}</math>  <math>E_1 = 0.186 \cdot W \cdot v^2 =</math>  <math>0.186 \cdot 100 \cdot 2^2 =</math>  <math>74.4 \text{ in-lbs}</math>  <math>E_1 = 74.4 \text{ in-lbs}</math>  <math>We = E_3 / (0.186 \cdot v_D^2) =</math>  <math>74.4 / (0.186 \cdot 2^2) = 100 \text{ lbs}</math></p>
<p><b>B Weight with propelling force</b></p> <p>Formula  <math>We = \frac{E_3}{0.186 \cdot v_D^2}</math></p> 	<p><b>W = 100 lbs</b>  <math>F = 200 \text{ lbs}</math>  <math>v_D = v = 2 \text{ ft/s}</math>  <math>s = 2 \text{ in (chosen)}</math>  <math>E_1 = 0.186 \cdot W \cdot v^2 =</math>  <math>0.186 \cdot 100 \cdot 2^2 = 74.4 \text{ in-lbs}</math>  <math>E_2 = F \cdot s = 200 \cdot 2 = 400 \text{ in-lbs}</math>  <math>E_3 = E_1 + E_2 = 74.4 + 400</math>  <math>= 474.4 \text{ in-lbs}</math>  <math>We = E_3 / (0.186 \cdot v_D^2) =</math>  <math>= 474.4 / (0.186 \cdot 2^2) = 637.6 \text{ lbs}</math></p>
<p><b>C Weight without propelling force direct against shock absorber</b></p> <p>Formula  <math>We = W</math></p> 	<p><b>W = 50 lbs</b>  <math>v_D = v = 2 \text{ ft/s}</math>  <math>E_1 = 0.186 \cdot W \cdot v^2 =</math>  <math>0.186 \cdot 50 \cdot 2^2 = 37.2 \text{ in-lbs}</math>  <math>E_1 = E_3 = 37.2 \text{ in-lbs}</math>  <math>We = \frac{E_3}{0.186 \cdot v_D^2} =</math>  <math>\frac{37.2}{0.186 \cdot 2^2} = 50 \text{ lbs}</math></p>
<p><b>D Weight without propelling force with mechanical advantage</b></p> <p>Formula  <math>We = \frac{E_3}{0.186 \cdot v_D^2}</math></p> 	<p><b>W = 150 lbs</b>  <math>v = 2 \text{ ft/s}</math>  <math>v_s = v_D = 0.5 \text{ ft/s}</math>  <math>E_1 = 0.186 \cdot W \cdot v^2 =</math>  <math>0.186 \cdot 150 \cdot 2^2 = 111.6 \text{ in-lbs}</math>  <math>E_1 = E_3 = 111.6 \text{ in-lbs}</math>  <math>We = \frac{E_3}{0.186 \cdot v_D^2} =</math>  <math>\frac{111.6}{0.186 \cdot 0.5^2} = 2400 \text{ lbs}</math></p>



Self-Compensating Shock Absorbers

Table with columns: TYPES, Stroke inch, Energy capacity in-lbs/cycle, Effective Weight (We min. lbs, We max. lbs), Page. Lists various shock absorber models like MC5M-1-B, MC150, SC25M-5, etc.

Self-Compensating Shock Absorbers

Table with columns: TYPES, Stroke inch, Energy capacity in-lbs/cycle, Effective Weight (We min. lbs, We max. lbs), Page. Lists various shock absorber models like MC3350-2, MC64100-3, CA2X2-1, etc.



**Self-Compensating Shock Absorbers**

TYPES	Stroke inch	Energy capacity in-lbs/cycle	Effective Weight		Page
			We min. lbs	We max. lbs	
CA3X8-3	8.00	200,000	64,000	192,000	104
CA3X8-4	8.00	200,000	160,000	480,000	104
CA3X12-1	12.00	300,000	15,360	46,080	104
CA3X12-2	12.00	300,000	38,400	15,200	104
CA3X12-3	12.00	300,000	96,000	288,000	104
CA3X12-4	12.00	300,000	240,000	720,000	104
CA4X6-3	6.00	420,000	8,000	19,000	105
CA4X6-5	6.00	420,000	19,000	41,000	105
CA4X6-7	6.00	420,000	41,000	94,000	105
CA4X8-3	8.00	560,000	11,000	25,000	105
CA4X8-5	8.00	560,000	25,000	55,000	105
CA4X8-7	8.00	560,000	55,000	125,000	105
CA4X16-3	16.00	1,120,000	22,000	50,000	105
CA4X16-5	16.00	1,120,000	50,000	110,000	105
CA4X16-7	16.00	1,120,000	110,000	250,000	105

**Adjustable Shock Absorbers**

TYPES	Stroke inch	Max. Energy Capacity		Effective Weight		Page
		E <sub>3</sub> in-lbs/cycle	E <sub>4</sub> in-lbs/h	We min. lbs	We max. lbs	
MA30M	0.32	31	50,000	0.5	31	37
MA50M	0.28	50	120,000	10	45	37
MA35	0.40	35	53,000	13	125	37
MA150	0.50	200	300,000	2	240	37
MA225	0.75	300	400,000	5	500	37
MA600	1.00	600	600,000	20	3,000	37
MA900	1.58	900	800,000	30	4,500	37
AS3/8X1	1.00	600	600,000	10	1,250	39
NA3/8x1	1.00	600	600,000	10	1,250	39
MA3325	0.91	1,900	670,000	20	3,800	77
ML3325	0.91	1,900	670,000	661	110,231	77
MA3350	1.91	3,800	760,000	28	5,400	77
ML3350	1.91	3,800	760,000	1,102	176,370	77
MA4525	0.91	3,762	950,000	95	22,000	78
ML4525	0.91	3,762	950,000	6,614	242,508	78
MA4550	1.91	7,523	1,000,000	150	32,000	78
ML4550	1.91	7,523	1,000,000	11,023	396,832	78
MA4575	2.91	11,506	1,300,000	155	33,000	78
ML6425	0.91	10,046	1,100,000	15,432	661,386	79
MA6450	1.91	20,135	1,300,000	480	110,000	79
ML6450	1.91	20,135	1,300,000	24,250	1,102,310	79
MA64100	3.91	40,005	1,700,000	600	115,000	79
MA64150	5.91	60,008	2,200,000	730	175,000	79
SASL11/8X1-R	0.91	8,000	1,250,000	700	700,000	81
SASL11/8X2-R	1.91	16,000	1,500,000	850	1,300,000	81
SALD½X1-P	0.91	1,350	750,000	10	2,700	83
SALD½X2-P	1.91	2,700	870,000	21	5,700	83
SALD¾X1-P	0.91	3,000	1,100,000	20	18,000	84
SALD¾X2-P	1.91	6,000	1,300,000	35	32,000	84
SALD¾X3-P	2.91	9,000	1,600,000	50	46,000	84
SALD11/8X2-P	1.91	16,000	1,500,000	120	50,000	85
SALD11/8X4-P	3.91	32,000	2,000,000	160	100,000	85
SALD11/8X6-P	5.91	48,000	2,500,000	200	150,000	85
SALDN¾X1-RF	0.98	3,450	950,000	95	22,000	87
SALDN¾X2-RF	1.97	6,900	1,000,000	150	32,000	87
SALDN¾X3-RF	2.95	10,350	1,300,000	155	33,000	87
SALDN¾X1-RR	0.98	3,450	950,000	95	22,000	88
SALDN¾X2-RR	1.97	6,900	1,000,000	150	32,000	88
SALDN¾X3-RR	2.95	10,350	1,300,000	155	33,000	88
A1½X2	2.00	21,000	3,200,000	430	70,000	107
A1½X3½	3.50	36,750	5,600,000	480	80,000	107
A1½X5	5.00	52,500	8,000,000	500	90,000	107
A1½X6½	6.50	68,250	10,400,000	680	100,000	107
A2X2	2.00	32,000	9,600,000	560	170,000	108
A2X4	4.00	80,000	12,000,000	560	180,000	108
A2X6	6.00	120,000	14,400,000	570	190,000	108
A2X8	8.00	170,000	16,800,000	580	200,000	108
A2X10	10.00	210,000	19,200,000	720	250,000	108
A3X5	5.00	140,000	20,000,000	1,050	340,000	109
A3X8	8.00	250,000	32,000,000	1,200	400,000	109
A3X12	12.00	390,000	48,000,000	1,350	450,000	109

**Shock Absorbers Soft Contact and Self-Compensating**

TYPES	Stroke inch	Energy capacity in-lbs/cycle	Effective Weight				Page
			Soft-Contact		Self-Compensating		
			me min. lbs	me max. lbs	me min. lbs	me max. lbs	
SC190-0	0.63	225	-	-	1.54	8.82	29
SC190-1	0.63	225	5	13	3	15	29
SC190-2	0.63	225	12	36	8	40	29
SC190-3	0.63	225	30	90	20	100	29
SC190-4	0.63	225	75	200	50	225	29
SC300-0	0.75	300	-	-	1.54	4	29
SC300-1	0.75	300	5	15	3	18	29
SC300-2	0.75	300	15	50	10	60	29
SC300-3	0.75	300	50	150	30	180	29
SC300-4	0.75	300	150	400	70	450	29
SC650-0	1.00	650	-	-	5.07	30.86	29
SC650-1	1.00	650	24	80	17	100	29
SC650-2	1.00	650	75	250	50	300	29
SC650-3	1.00	650	240	800	150	900	29
SC650-4	1.00	650	800	2,400	450	2,600	29
SC925-0	1.58	975	18	55	10	65	29
SC925-1	1.58	975	50	160	30	200	29
SC925-2	1.58	975	130	460	90	600	29
SC925-3	1.58	975	400	1,350	250	1,600	29
SC925-4	1.58	975	1,200	4,300	750	4,600	29

# Miniature Shock Absorbers

## Tuning for almost any design

**Miniature shock absorbers from ACE are tried-and-tested quality products used in millions of industrial designs throughout the world. They optimize machines in an equally reliable and effective way by decelerating loads quickly and without recoil.**

The compact, maintenance-free, hydraulic machine elements can be easily and quickly integrated in any design and certain models can be directly integrated in pneumatic cylinders. They reduce the load and increase the efficiency for handling devices, rotary and pivoting actuators, linear cylinders and many other industrial applications. ACE ensures a long service life with innovative sealing techniques, shock absorber and inner pressure chambers fully machined from solid high tensile alloy steel.

Easy, inexpensive construction

Large variety of models for every purpose

Less stress on the machine

Reduced operating costs

Maintenance-free



## Miniature Shock Absorbers



### MC5 to MC75 Page 18

Self-Compensating

#### Shock absorbers in miniature format

Miniature slides, Pneumatic cylinders, Handling modules, Copiers

### MC150 to MC600 Page 20

Self-Compensating, Rolling Diaphragm Technology

#### Exceptionally high endurance and with the lowest resetting force

Linear slides, Pneumatic cylinders, Swivel units, Handling modules

### MC150-V4A to MC600-V4A Page 22

Self-Compensating, Stainless Steel, Rolling Diaphragm Technology

#### Exceptionally high endurance with stainless steel corrosion protection

Clean room areas, Pharmaceutical industry, Medical technology, Food industry

### PMCN150 to PMCN600 Page 24

Self-Compensating, Rolling Diaphragm Technology, TPU Bellow

#### Reliable protection from fluids and particulate

Finishing and processing centers, Clean room areas, Pharmaceutical industry, Medical technology

### PMCN150-V4A to PMCN600-V4A Page 26

Self-Compensating, Rolling Diaphragm Technology, TPU Bellow

#### Optimum corrosion protection

Finishing and processing centers, Clean room areas, Pharmaceutical industry, Medical technology

### SC190 to SC925 Page 28

Self-Compensating, Soft-Contact

#### Long stroke and soft impact

Linear slides, Pneumatic cylinders, Handling modules, Machines and plants

### SC<sup>2</sup>25 to SC<sup>2</sup>190 Page 30

Self-Compensating, Piston Tube Technology

#### Piston tube design for maximum energy absorption

Linear slides, Pneumatic cylinders, Swivel units, Handling modules

### SC<sup>2</sup>300 to SC<sup>2</sup>650 Page 32

Self-Compensating, Piston Tube Technology

#### Piston tube design for maximum energy absorption

Turntables, Swivel units, Robot arms, Linear slides

### SC25-HC to SC650-HC Page 34

Self-Compensating

#### Miniature self compensating shocks for high-speed applications

Linear slides, Tool machines, Handling modules, Production plants

### MA30 to MA900 Page 36

Adjustable

#### Stepless adjustment

Linear slides, Pneumatic cylinders, Swivel units, Handling modules

### 3/8x1 Page 38

Adjustable

#### Miniature adjustable shock delivers convenience

Linear slides, Transport industry, Tool machines, Handling modules

## MC5 to MC75

### Shock absorbers in miniature format

#### Self-Compensating


**Energy capacity 6 in-lbs/Cycle to 75 in-lbs/Cycle**

**Stroke 0.16 in to 0.40 in**

Ideal for compact, efficient designs: The miniature size of the product family MC5 to MC75 delivers very short overall lengths and low return forces.

The outer body of each shock, produced from one solid piece, is filled with temperature stable oil, offers a continuous outer body thread including a supplied lock nut and also has an integrated positive stop. These maintenance-free hydraulic machine elements from ACE are ready for immediate installation. A wide range of energy absorption and effective weight are further benefits in these compact units. Self-compensating shock absorbers react to changing energy conditions, without adjustment.

These self-compensating miniature shock absorbers are perfectly suited to use in applications such as rotary actuators, automation, light industrial manufacturing, material handling and packaging equipment, medical, electronics and robotics.

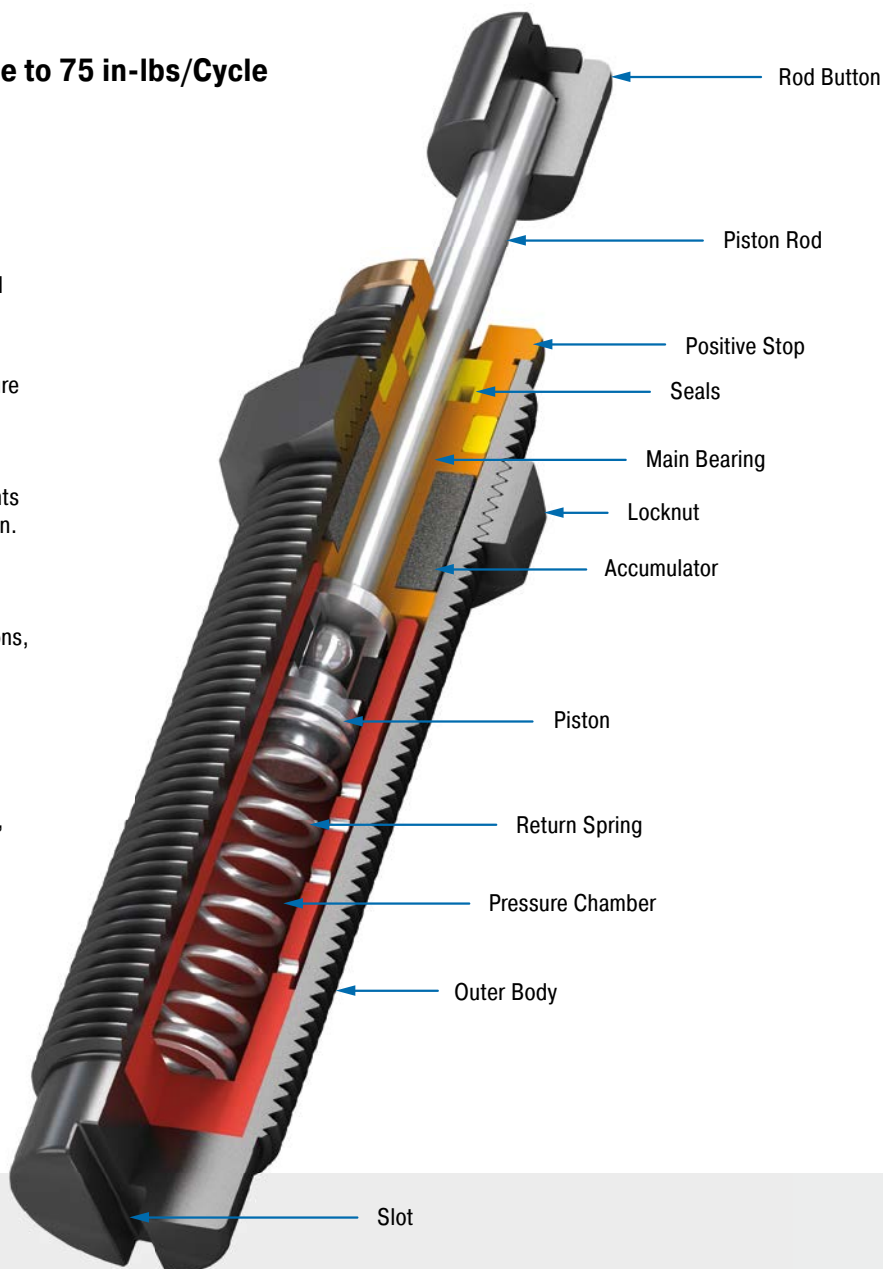

#### Technical Data

**Energy capacity:** 6 in-lbs/Cycle to 75 in-lbs/Cycle

**Impact velocity range:** 1.89 ft/sec to 12 ft/sec

**Operating temperature range:** 14 °F to 150 °F

**Mounting:** In any position

**Positive stop:** Integrated

**Material:** Outer body, Accessories: Steel corrosion-resistant coating; Piston rod: Hardened stainless steel; Rod end button: Steel, MC25 and MC75: Elastomer Insert; Locknut: Steel, MC5 and MC9: Aluminium

**Damping medium:** Oil, temperature stable


**Application field:** Miniature slides, Pneumatic cylinders, Handling modules, Copiers, Measuring tables, Machines and plants, Locking systems

**Note:** If precise end position data is required consider use of a stop collar.

**Safety information:** External materials in the surrounding area can attack the seal components and lead to a shorter service life. Please contact ACE for appropriate solution suggestions. Do not paint the shock absorbers due to heat emission.


**On request:** Increased corrosion protection. Special finishes. Models without rod end button also available on request.

### MC5M

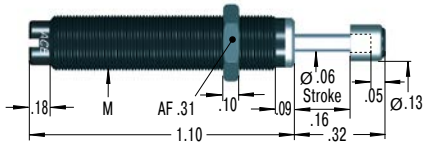


Standard version without button for MC5, MC9 and MC10

### MC9M

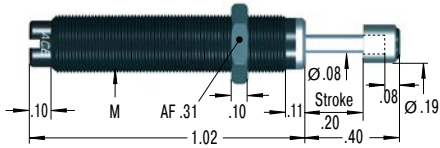


Standard version without button for MC5, MC9 and MC10

### MC30M

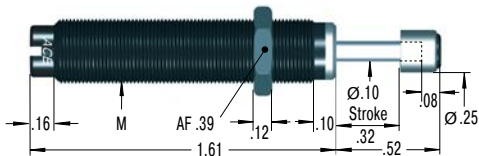


### MC10M

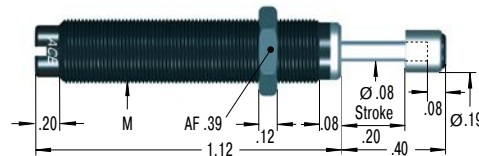

Standard version without button for MC5, MC9 and MC10  
M8x0.75 also available to order


### MC25

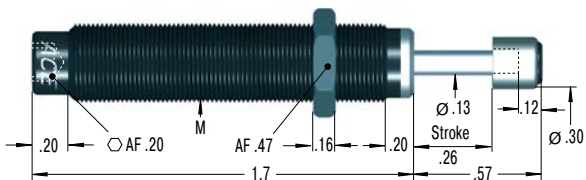

Product available for UNF and metric thread (for metric add suffix -M from part number)


### 250-0306

#### Mounting Block

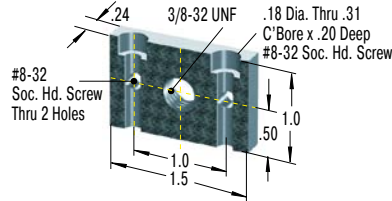


### 250-0307

#### Mounting Block




### MC75

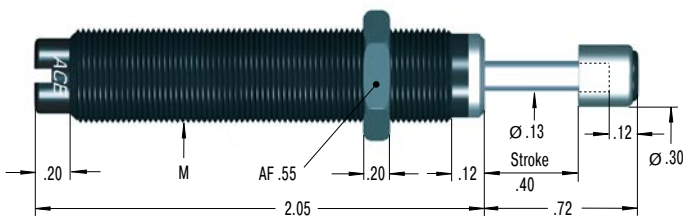

Product available for UNF and metric thread (for metric add suffix -M from part number)


### 250-0308

#### Mounting Block

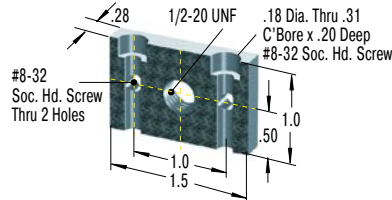

### 250-0309

#### Mounting Block



Accessories, mounting, installation ... starting on page 40.

### Performance

TYPES	Max. Energy Capacity		Effective Weight		Return Force min. lbs	Return Force max. lbs	Return Time s	Side Load Angle max. °	M	Weight lbs
	E <sub>3</sub> in-lbs/cycle	E <sub>4</sub> in-lbs/h	We min. lbs	We max. lbs						
MC5M-1-B	6	18,000	0.22	2.0	0.44	1.15	0.2	2	M5x0.5	0.007
MC5M-2-B	6	18,000	1.7	4.9	0.44	1.15	0.2	2	M5x0.5	0.007
MC5M-3-B	6	18,000	4.4	11.1	0.44	1.15	0.2	2	M5x0.5	0.007
MC9M-1-B	9	18,000	1.35	7.0	0.31	0.85	0.3	2	M6x0.5	0.009
MC9M-2-B	9	18,000	1.75	9.0	0.31	0.85	0.3	2	M6x0.5	0.009
MC10MH-B	11	35,000	1.5	11.0	0.5	1.0	0.3	3	M8x1	0.017
MC10ML-B	11	35,000	0.75	6.0	0.5	1.0	0.3	3	M8x1	0.017
MC30M-1	31	50,000	1.0	4.3	1.16	1.57	0.3	2	M8x1	0.022
MC30M-2	31	50,000	3.97	11.9	1.16	1.57	0.3	2	M8x1	0.022
MC30M-3	31	50,000	11.02	33.0	1.16	1.57	0.3	2	M8x1	0.022
MC25	20	200,000	4	12	0.8	1.7	0.2	2	3/8-32 UNF / M10x1	0.044
MC25H	20	200,000	10	30	0.8	1.7	0.2	2	3/8-32 UNF / M10x1	0.044
MC25L	20	200,000	1.5	5.0	0.8	1.7	0.2	2	3/8-32 UNF / M10x1	0.044
MC75-1	75	250,000	0.5	2.5	1.0	2.5	0.3	2	1/2-20 UNF / M12x1	0.088
MC75-2	75	250,000	2	14	1.0	2.5	0.3	2	1/2-20 UNF / M12x1	0.088
MC75-3	75	250,000	6	80	1.0	2.5	0.3	2	1/2-20 UNF / M12x1	0.088
MC75-4	75	250,000	55	160	1.0	2.5	0.3	2	1/2-20 UNF / M12x1	0.088

<sup>1</sup> For applications with higher side load angles consider using the side load adaptor, pages 44 to 51.

## MC150 to MC600


Exceptionally high endurance and with the lowest resetting force

**Self-Compensating, Rolling Diaphragm Technology**  
**Energy capacity 175 in-lbs/Cycle to 1,200 in-lbs/Cycle**  
**Stroke 0.50 in to 1.00 in**

Tried-and-tested and durable: With a hermetically sealed rolling diaphragm in each absorber, the MC150 to MC600 product family is suitable for an exceptionally high lifetime of use with up to 25 million cycles. The rolling diaphragm technology perfected by ACE ensures complete separation of the damping fluid from the surrounding air. This makes it possible for direct installation in a pressure chamber to provide end stop damping in pneumatic cylinders up to approximately 100 psi (7 bar).

The rolling diaphragm delivers very low return forces for these maintenance-free, ready-to-install absorbers. An integrated positive stop and progressive energy capacities, with a wide range of effective weight, make these miniature shock absorbers a winner. Furthermore, the use of a side load adapter allows impact angles of up to 25°. Stainless steel options are available for greater environmental compatibility. Self-compensating shock absorbers react to changing energy conditions, without adjustment.

These self compensating miniature shock absorbers are capable of universal mounting even inside a cylinder. These shocks are ideal for use in multitude of applications including material handling equipment, packaging equipment, medium robotics and machine tools.

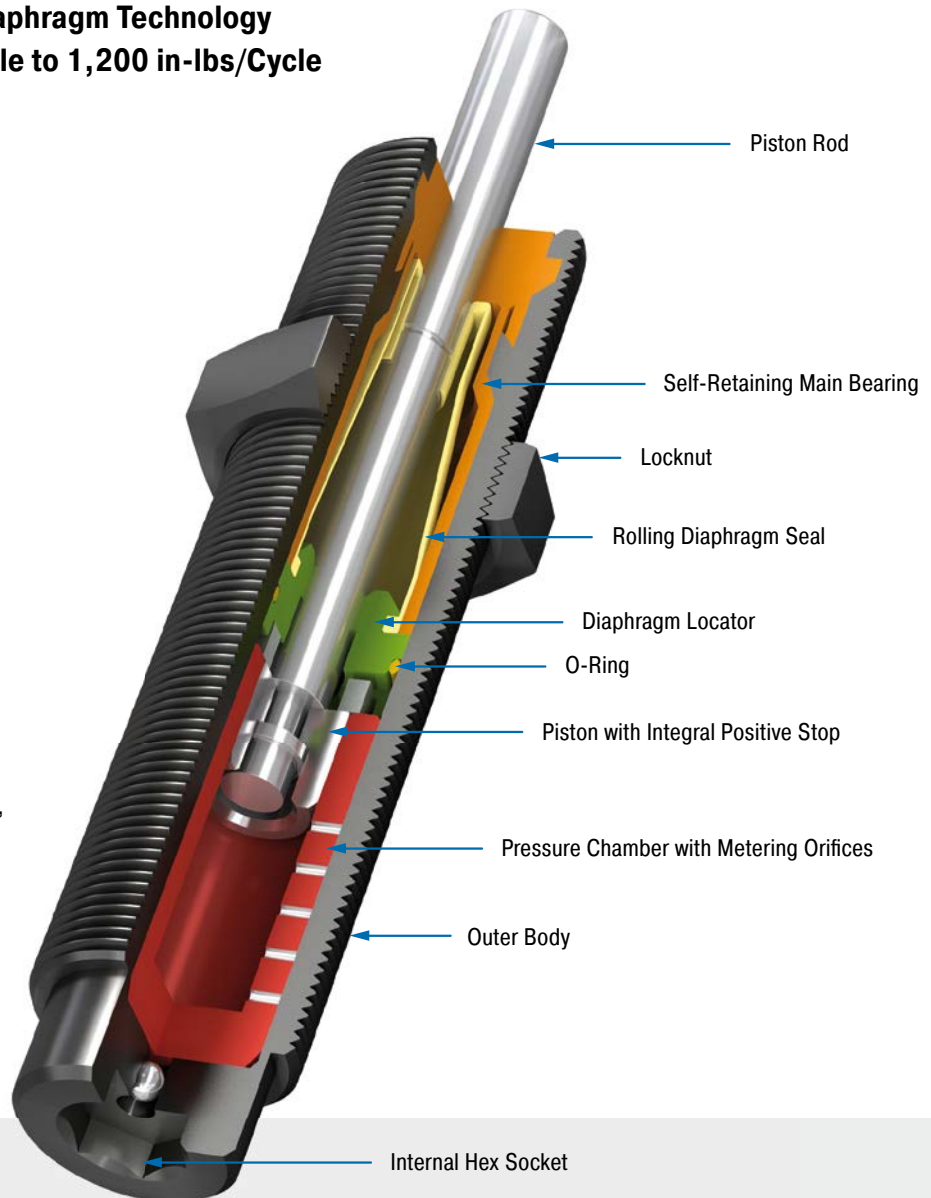

### Technical Data

**Energy capacity:** 175 in-lbs/Cycle to 1,200 in-lbs/Cycle

**Impact velocity range:** 0.22 ft/sec to 19.7 ft/sec. Other speeds on request.

**Operating temperature range:** 32 °F to 150 °F

**Mounting:** In any position

**Positive stop:** Integrated

**Material:** Outer body, Accessories: Steel corrosion-resistant coating; Main bearing: Plastic; Piston rod: Hardened stainless steel (1.4125, AISI 440C); Rolling diaphragm: EPDM

**Damping medium:** Oil, temperature stable


**Application field:** Linear slides, Pneumatic cylinders, Swivel units, Handling modules, Machines and plants, Finishing and processing centers, Measuring tables, Tool machines, Locking systems

**Note:** If precise end position data is required consider use of a stop collar.

**Safety information:** External materials in the surrounding area can attack the rolling seal and lead to a shorter service life. Please contact ACE for appropriate solution suggestions. Suitable for use in pressure chambers up to 101.53 psi.


**On request:** Increased corrosion protection. Special threads or other special options.

### MC150

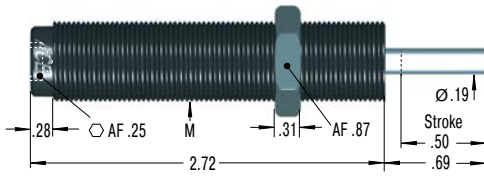


Product available for UNF and metric thread (for metric add suffix -M from part number)  
M14x1 also available to special order (add suffix -ME to part number)

### MC225

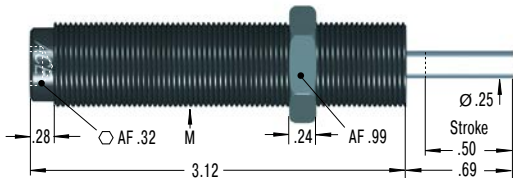


Product available for UNF and metric thread (for metric add suffix -M from part number)

### MC600

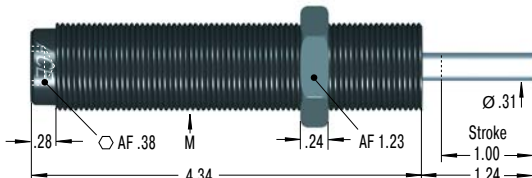


Product available for UNF and metric thread (for metric add suffix -M from part number)  
M27x3 also available to special order (add suffix -ML to part number)


### 250-0318 Mounting Block

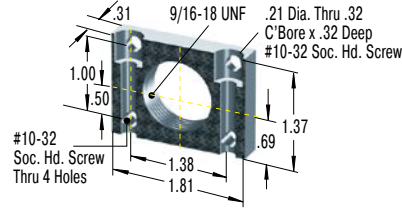


### 250-0352 Mounting Block




### 250-0401 Mounting Block

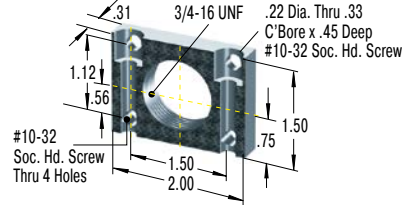


### 250-0353 Mounting Block



### 250-0402 Mounting Block

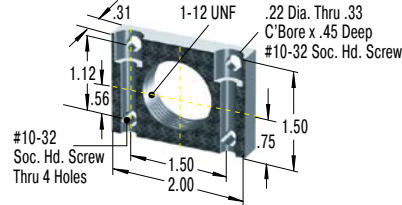

### 250-0044 Mounting Block



Additional accessories, mounting, installation ... starting on page 40.

### Performance

TYPES	Max. Energy Capacity		Effective Weight		Return Force min. lbs	Return Force max. lbs	Return Time s	Side Load Angle max. °	M	Weight lbs
	E <sub>3</sub> in-lbs/cycle	E <sub>4</sub> in-lbs/h	We min. lbs	We max. lbs						
MC150	175	300,000	2	22	0.7	1.2	0.4	4	9/16-18 UNF / M14x1.5	0.119
MC150H	175	300,000	20	200	0.7	1.2	0.4	4	9/16-18 UNF / M14x1.5	0.119
MC150H2	175	300,000	150	450	0.7	1.2	0.4	4	9/16-18 UNF / M14x1.5	0.119
MC150H3	175	300,000	400	900	0.7	1.2	1.0	4	9/16-18 UNF / M14x1.5	0.119
MC225	360	400,000	5	55	1.0	1.5	0.3	4	3/4-16 UNF / M20x1.5	0.340
MC225H	360	400,000	50	500	1.0	1.5	0.3	4	3/4-16 UNF / M20x1.5	0.340
MC225H2	360	400,000	400	2,000	1.0	1.5	0.3	4	3/4-16 UNF / M20x1.5	0.340
MC225H3	360	400,000	1,800	4,000	1.0	1.5	0.3	4	3/4-16 UNF / M20x1.5	0.340
MC600	1,200	600,000	20	300	1.0	2.0	0.6	2	1-12 UNF / M25x1.5	0.569
MC600H	1,200	600,000	250	2,500	1.0	2.0	0.6	2	1-12 UNF / M25x1.5	0.569
MC600H2	1,200	600,000	880	5,000	1.0	2.0	0.6	2	1-12 UNF / M25x1.5	0.569
MC600H3	1,200	600,000	4,800	10,000	1.0	2.0	0.6	2	1-12 UNF / M25x1.5	0.569

<sup>1</sup> For applications with higher side load angles consider using the side load adaptor, pages 44 to 51.

## MC150-V4A to MC600-V4A


Exceptionally high endurance with stainless steel corrosion protection

**Self-Compensating, Stainless Steel, Rolling Diaphragm Technology**  
**Energy capacity 175 in-lbs/Cycle to 1,200 in-lbs/Cycle**  
**Stroke 0.50 in to 1.00 in**

Brilliant in every respect: These high performance stainless steel miniature shock absorbers are based on the MC150 to MC600 product family and its proven damping technology. This means that these special absorbers offer all of the benefits of the standard units such as the ACE rolling diaphragm technology which delivers maximum service life and direct installation in a pressure chamber with up to approx. 100 psi (7 bar).

Thanks to perfectly progressive maximum energy absorption and effective weight potential, their use is augmented even further by the stainless steel outer body and a complete range of stainless steel accessories (AISI 316L). Self-compensating shock absorbers react to changing energy conditions, without adjustment.

These self-compensating miniature stainless steel shock absorbers are used in medical and electro-technology, as well as marine, packaging, and chemical applications. Shocks can be filled with food-grade oil for food processing applications.

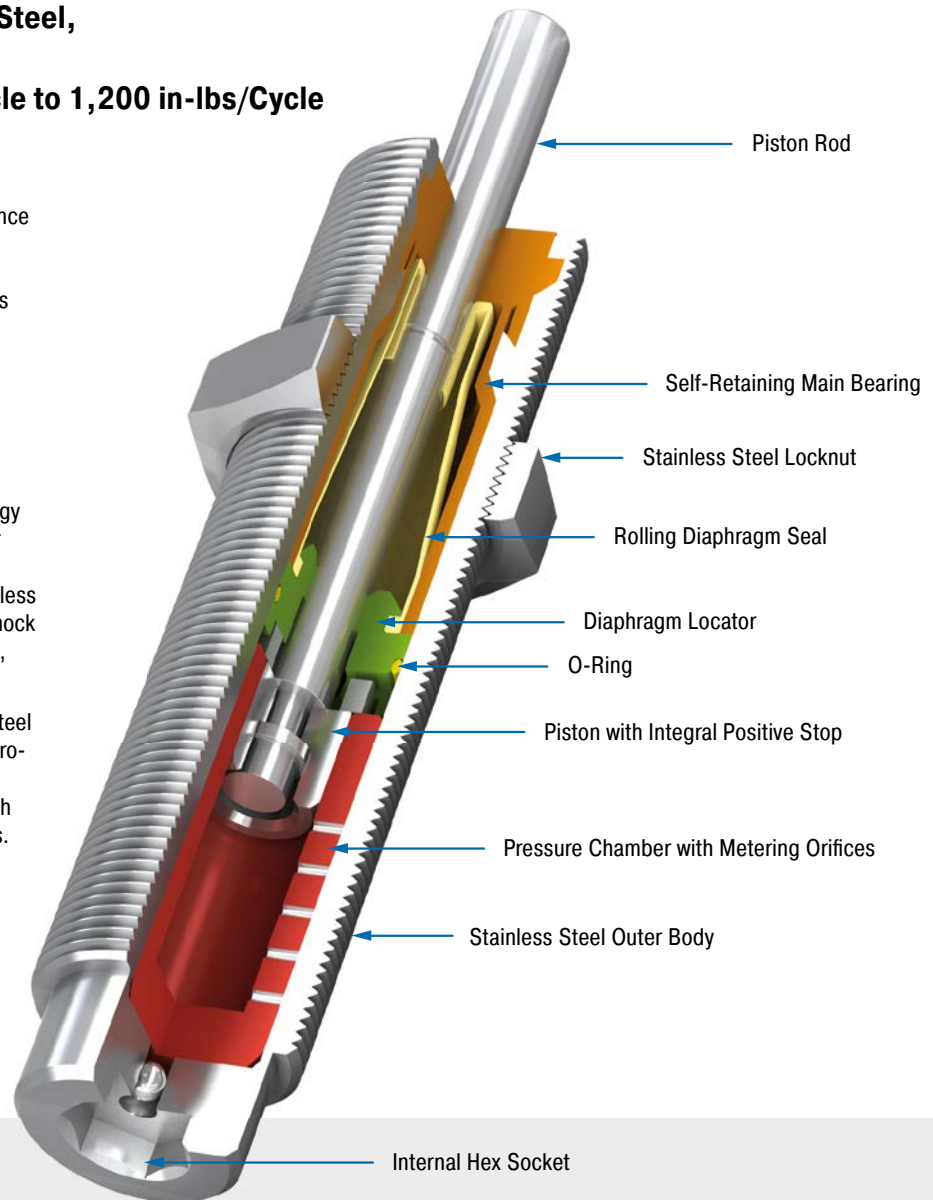

### Technical Data

**Energy capacity:** 175 in-lbs/Cycle to 1,200 in-lbs/Cycle

**Impact velocity range:** 0.22 ft/sec to 19.7 ft/sec. Other speeds on request.

**Operating temperature range:** 32 °F to 150 °F

**Mounting:** In any position

**Positive stop:** Integrated

**Material:** Outer body, Locknut, Accessories: Stainless steel (1.4404, AISI 316L); Main bearing: Plastic; Piston rod: Hardened stainless steel (1.4125, AISI 440C); Rolling diaphragm: EPDM

**Damping medium:** Oil, temperature stable

**Application field:** Clean room areas, Pharmaceutical industry, Medical technology, Food industry, Linear slides, Pneumatic cylinders, Handling modules, Machines and plants, Finishing and processing centers, Measuring tables

**Note:** If precise end position data is required consider use of a stop collar.


**Safety information:** External materials in the surrounding area can attack the rolling seal and lead to a shorter service life. Please contact ACE for appropriate solution suggestions. Suitable for use in pressure chambers up to 101.53 psi.

**On request:** Special oil with food approval. Special threads or other special options available on request.




Self-Compensating, Stainless Steel, Rolling Diaphragm Technology

### MC150M-V4A

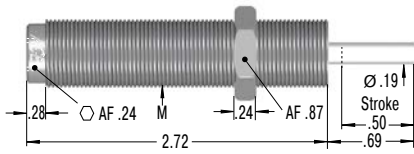


#### 250-0753 Nylon Button




$E_3 \text{ max} = 123.91 \text{ lbs}$


#### 250-0441 Locknut




#### 250-0255 Mounting Block



### MC225M-V4A

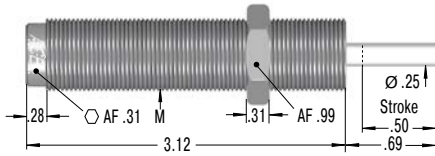


#### 250-0754 Nylon Button




$E_3 \text{ max} = 292.07 \text{ lbs}$


#### 250-0442 Locknut




#### 250-0434 Mounting Block



### MC600M-V4A

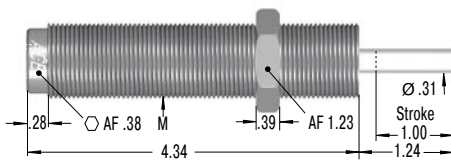


#### 250-0755 Nylon Button




$E_3 \text{ max} = 601.85 \text{ lbs}$

#### 250-0443 Locknut



#### 250-0436 Mounting Block



Additional accessories, mounting, installation ... starting on page 40.

### Performance

TYPES	Max. Energy Capacity		Effective Weight		Return Force min. lbs	Return Force max. lbs	Return Time s	Side Load Angle max. °	M	Weight lbs
	$E_3$ in-lbs/cycle	$E_4$ in-lbs/h	We min. lbs	We max. lbs						
MC150M-V4A	175	300,000	2	22	0.7	1.2	0.4	4	M14x1.5	0.119
MC150MH-V4A	175	300,000	20	200	0.7	1.2	0.4	4	M14x1.5	0.119
MC150MH2-V4A	175	300,000	150	450	0.7	1.2	0.4	4	M14x1.5	0.119
MC150MH3-V4A	175	300,000	400	900	0.7	1.2	1.0	4	M14x1.5	0.119
MC225M-V4A	360	400,000	5	55	1.0	1.5	0.3	4	M20x1.5	0.340
MC225MH-V4A	360	400,000	50	500	1.0	1.5	0.3	4	M20x1.5	0.340
MC225MH2-V4A	360	400,000	400	2,000	1.0	1.5	0.3	4	M20x1.5	0.340
MC225MH3-V4A	360	400,000	1,800	4,000	1.0	1.5	0.3	4	M20x1.5	0.340
MC600M-V4A	1,200	600,000	20	300	1.0	2.0	0.6	2	M25x1.5	0.569
MC600MH-V4A	1,200	600,000	250	2,500	1.0	2.0	0.6	2	M25x1.5	0.569
MC600MH2-V4A	1,200	600,000	880	5,000	1.0	2.0	0.6	2	M25x1.5	0.569
MC600MH3-V4A	1,200	600,000	4,800	10,000	1.0	2.0	0.6	2	M25x1.5	0.569

<sup>1</sup> For applications with higher side load angles please contact ACE.

## PMCN150 to PMCN600

Reliable protection from fluids and particulate

**Self-Compensating, Rolling Diaphragm Technology, TPU Bellow**


**Energy capacity 175 in-lbs/Cycle to 1,200 in-lbs/Cycle  
Stroke 0.50 in to 1.00 in**

Hermetically sealed: The shock absorbers from the ACE Protection family PMCN have a compact, perfectly sealed cap as a special feature.

This protection bellows, made of TPU (thermoplastic polyurethane), safely encapsulates the proven ACE rolling diaphragm from the outside environment. Aggressive cutting, lubricating and cleaning agents don't stand a chance and the function of the maintenance-free, ready-to-install shock absorber is retained. They are also available in full stainless steel.

The PMCN range is a good alternative to the SP type air bleed collar if no compressed air is available on the machine or system.

Reliable protection against aggressive environments including fluids and abrasives, these self-compensating miniature shock absorbers are the first choice where conventional dampers wear out too quickly. Use them in harsh environments where cutting, cooling or cleaning agents can attack.

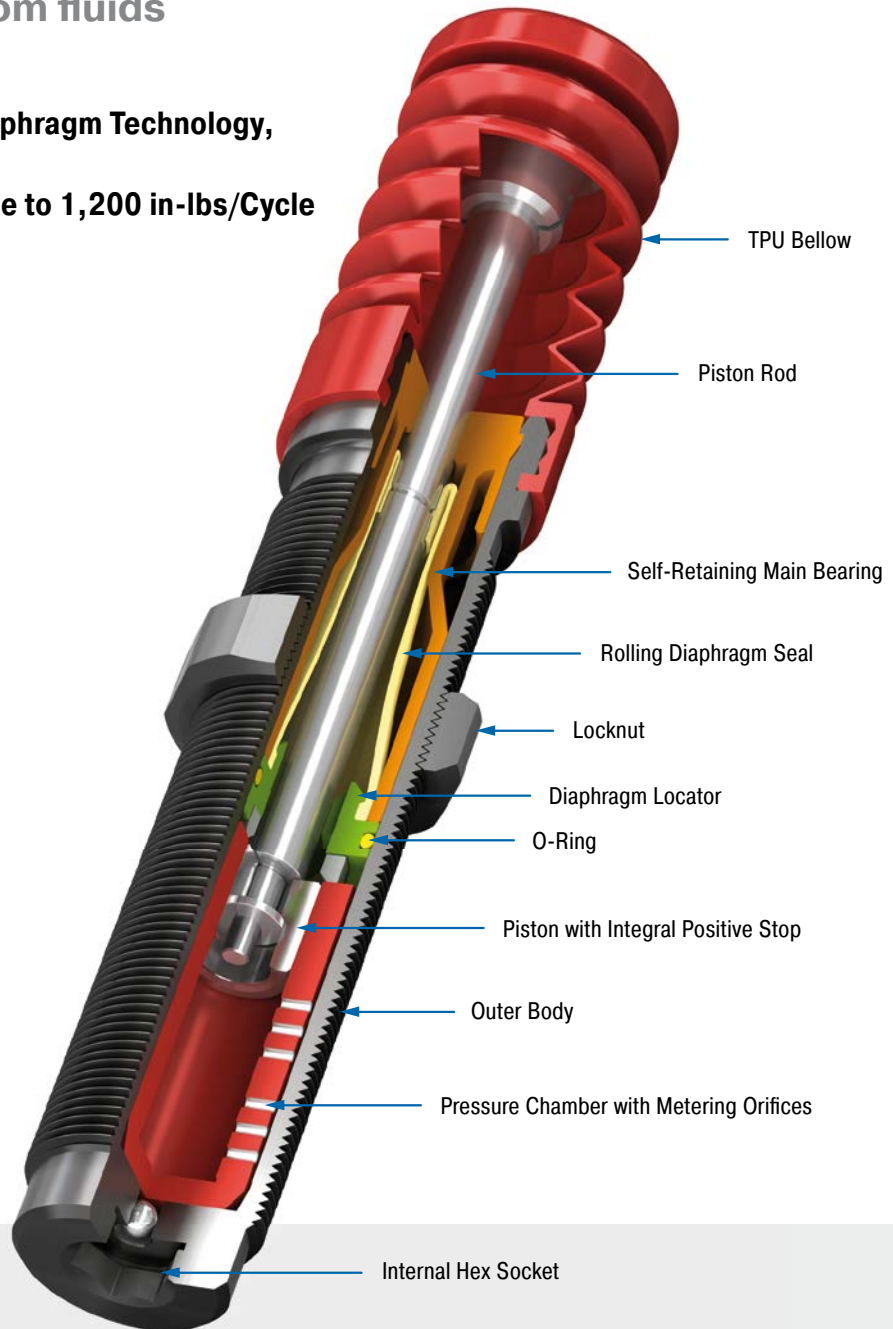

### Technical Data

**Energy capacity:** 175 in-lbs/Cycle to 1,200 in-lbs/Cycle

**Impact velocity range:** 0.22 ft/sec to 19.7 ft/sec. Other speeds on request.

**Operating temperature range:** 32 °F to 150 °F

**Mounting:** In any position

**Positive stop:** Integrated

**Material:** Outer body: Steel corrosion-resistant coating; Main bearing: Plastic; Piston rod: Hardened stainless steel (1.4125, AISI 440C); Bellow: TPU, steel insert: Stainless steel (1.4404/1.4571, AISI 316L/316Ti); Rolling diaphragm: EPDM

**Damping medium:** Oil, temperature stable


**Application field:** Finishing and processing centers, Clean room areas, Pharmaceutical industry, Medical technology, Food industry, Linear slides, Pneumatic cylinders, Machines and plants

**Note:** Final preliminary test must be done on the application.

**Safety information:** Do not paint the shock absorbers due to heat emission.

**On request:** Special accessories available on request.


### PMCN150M

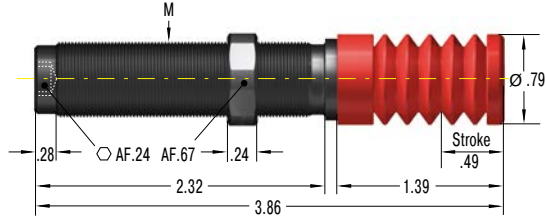


### 250-0233 Locknut



### 250-0352 Mounting Block




### PMCN225M

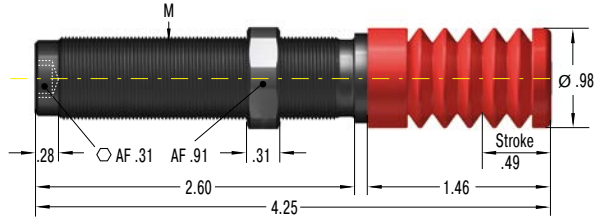


### 250-0207 Locknut




### 250-0353 Mounting Block




### PMCN600M

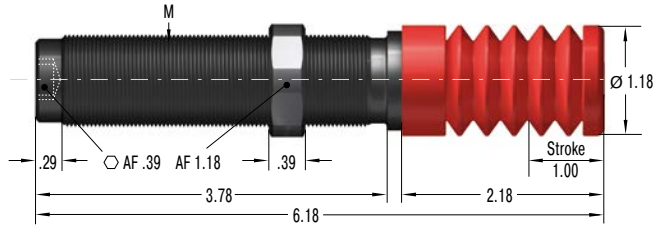

### 250-0040 Locknut



### 250-0044 Mounting Block



Additional accessories, mounting, installation ... starting on page 40.

### Performance

TYPES	Max. Energy Capacity		Effective Weight		Return Force min. lbs	Return Force max. lbs	Return Time s	Side Load Angle max. °	M	Weight lbs
	E <sub>3</sub> in-lbs/cycle	E <sub>4</sub> in-lbs/h	We min. lbs	We max. lbs						
PMCN150M	175	300,000	2	22	1.80	17.98	1.0	4	M14x1.5	0.148
PMCN150MH	175	300,000	20	190	1.80	17.98	1.0	4	M14x1.5	0.148
PMCN150MH2	175	300,000	155	440	1.80	17.98	1.0	4	M14x1.5	0.148
PMCN150MH3	175	300,000	400	900	1.80	17.98	1.0	4	M14x1.5	0.148
PMCN225M	360	400,000	5	50	1.80	19.11	0.3	4	M20x1.5	0.375
PMCN225MH	360	400,000	50	510	1.80	19.11	0.3	4	M20x1.5	0.375
PMCN225MH2	360	400,000	400	2,000	1.80	19.11	0.3	4	M20x1.5	0.375
PMCN225MH3	360	400,000	1,800	4,000	1.80	19.11	0.3	4	M20x1.5	0.375
PMCN600M	1,200	600,000	20	300	1.80	20.23	0.6	2	M25x1.5	0.699
PMCN600MH	1,200	600,000	250	2,490	1.80	20.23	0.6	2	M25x1.5	0.699
PMCN600MH2	1,200	600,000	880	5,000	1.80	20.23	0.6	2	M25x1.5	0.699
PMCN600MH3	1,200	600,000	4,800	10,000	1.80	20.23	0.6	2	M25x1.5	0.699

## PMCN150-V4A to PMCN600-V4A

### Optimum corrosion protection

#### Self-Compensating, Rolling Diaphragm Technology, TPU Bellow


**Energy capacity 175 in-lbs/Cycle to 1,200 in-lbs/Cycle**  
**Stroke 0.50 in to 1.00 in**

Hermetically sealed and rustproof: The Protection product family PMCN is also available in a stainless steel design. This is of particular interest to the food and packaging industries.

Their main feature is the compact, totally sealed bellow between the body and the cap made of TPU (thermoplastic polyurethane). This protection safely encapsulates the ACE rolling diaphragm from the outside environment. Aggressive fluids don't stand a chance.

The PMCN range is an excellent alternative if the accessory option of the SP type air bleed collar cannot be used due to a lack of compressed air.

The PMCN range self-compensating miniature shock absorbers, produced from stainless steel, are primarily suitable for use in the food industry, but are also wherever a high-quality appearance is important e.g. in shipbuilding.

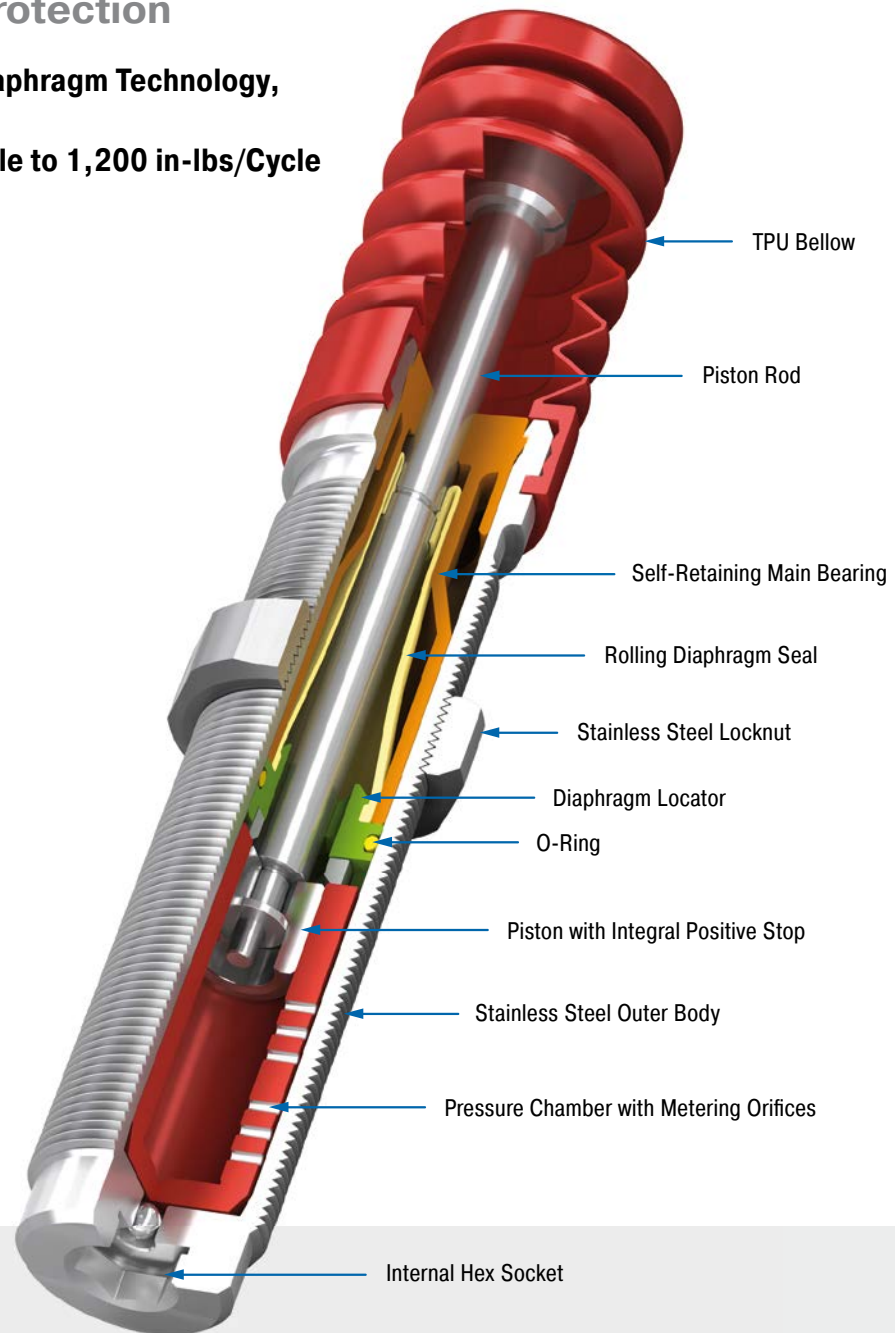

### Technical Data

**Energy capacity:** 175 in-lbs/Cycle to 1,200 in-lbs/Cycle

**Impact velocity range:** 0.26 ft/sec to 19.7 ft/sec. Other speeds on request.

**Operating temperature range:** 32 °F to 150 °F

**Mounting:** In any position

**Positive stop:** Integrated

**Material:** Outer body: Stainless steel (1.4404, AISI 316L); Main bearing: Plastic; Piston rod: Hardened stainless steel (1.4125, AISI 440C); Bellow: TPU, steel insert: Stainless steel (1.4404/1.4571, AISI 316L/316Ti); Rolling diaphragm: EPDM

**Damping medium:** Oil, temperature stable


**Application field:** Finishing and processing centers, Clean room areas, Pharmaceutical industry, Medical technology, Food industry, Machines and plants

**Note:** Final preliminary test must be done on the application.


**Safety information:** Do not paint the shock absorbers due to heat emission.

**On request:** Special accessories available on request.


### PMCN150M-V4A

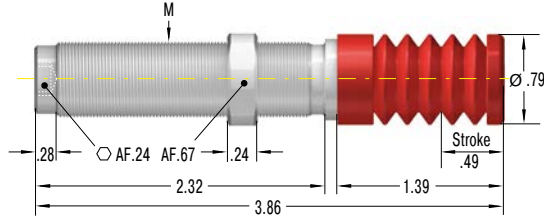


#### 250-0441 Locknut




#### 250-0255 Mounting Block




### PMCN225M-V4A

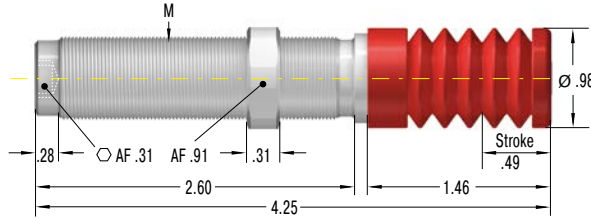


#### 250-0442 Locknut




#### 250-0434 Mounting Block




### PMCN600M-V4A

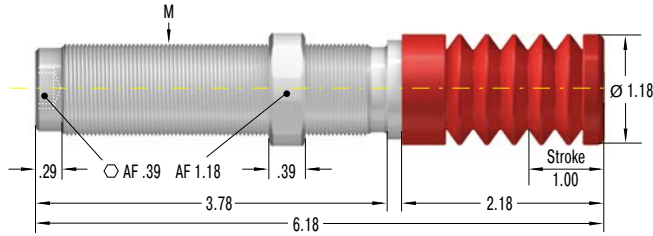

#### 250-0443 Locknut



#### 250-0436 Mounting Block



Additional accessories, mounting, installation ... starting on page 40.

### Performance

TYPES	Max. Energy Capacity		Effective Weight		Return Force min. lbs	Return Force max. lbs	Return Time s	Side Load Angle max. °	M	Weight lbs
	E <sub>3</sub> in-lbs/cycle	E <sub>4</sub> in-lbs/h	We min. lbs	We max. lbs						
PMCN150M-V4A	175	300,000	2	22	1.80	17.98	1.0	4	M14x1.5	0.148
PMCN150MH-V4A	175	300,000	20	190	1.80	17.98	1.0	4	M14x1.5	0.148
PMCN150MH2-V4A	175	300,000	155	440	1.80	17.98	1.0	4	M14x1.5	0.148
PMCN150MH3-V4A	175	300,000	400	900	1.80	17.98	1.0	4	M14x1.5	0.148
PMCN225M-V4A	360	400,000	5	55	1.80	19.11	0.3	4	M20x1.5	0.375
PMCN225MH-V4A	360	400,000	50	510	1.80	19.11	0.3	4	M20x1.5	0.375
PMCN225MH2-V4A	360	400,000	400	2,000	1.80	19.11	0.3	4	M20x1.5	0.375
PMCN225MH3-V4A	360	400,000	1,800	4,000	1.80	19.11	0.3	4	M20x1.5	0.375
PMCN600M-V4A	1,200	600,000	20	300	1.80	20.23	0.6	2	M25x1.5	0.699
PMCN600MH-V4A	1,200	600,000	250	2,490	1.80	20.23	0.6	2	M25x1.5	0.699
PMCN600MH2-V4A	1,200	600,000	880	5,000	1.80	20.23	0.6	2	M25x1.5	0.699
PMCN600MH3-V4A	1,200	600,000	4,800	10,000	1.80	20.23	0.6	2	M25x1.5	0.699

## SC190 to SC925

Long stroke and soft impact

**Self-Compensating, Soft-Contact**


**Energy capacity 225 in-lbs/Cycle to 975 in-lbs/Cycle**

**Stroke 0.63 in to 1.58 in**

Ideal for soft damping: the SC found in the model code from the ACE product family SC190 to SC925 stands for 'soft contact'. These miniature shock absorbers manufactured from one solid piece are designed in such a way that they can be setup with a linear or a progressive braking curve. The soft damping character is thanks to the special, long strokes which produce smooth deceleration and low reaction forces.

These maintenance-free, ready-to-install hydraulic machine elements are equipped with an integrated positive stop. The use of side load adapter allows impact angles of up to 25°. Thanks to the designed overlapping effective weight ranges, these dampers cover an effective load range of 3 lbs. to 4,400 lbs! Self-compensating shock absorbers react to changing energy conditions, without adjustment.

These miniature self-compensating shock absorbers from the SC190 to SC925 product family are used in industrial, automation and machine engineering and primarily in the areas of handling and automation.

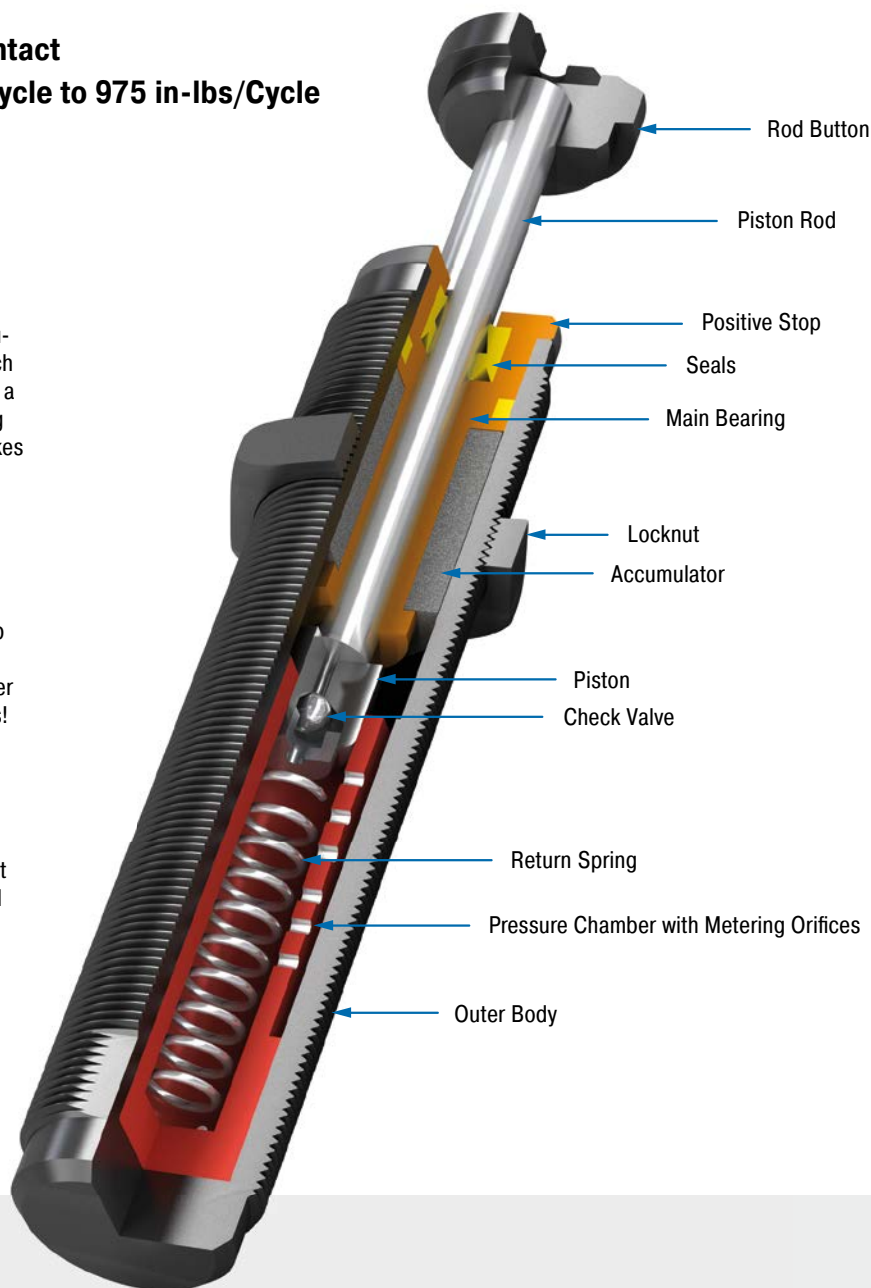

### Technical Data

**Energy capacity:** 225 in-lbs/Cycle to 975 in-lbs/Cycle

**Impact velocity range:** 0.5 ft/sec to 12 ft/sec. Other speeds on request.

**Operating temperature range:** 32 °F to 150 °F

**Mounting:** In any position

**Positive stop:** Integrated

**Material:** Outer body, Accessories: Steel corrosion-resistant coating; Piston rod: Hardened stainless steel

**Damping medium:** Oil, temperature stable

**Application field:** Linear slides, Pneumatic cylinders, Handling modules, Machines and


plants, Finishing and processing centers, Measuring tables, Tool machines

**Note:** If precise end position data is required consider use of a stop collar.

**Safety information:** External materials in the surrounding area can attack the seal components and lead to a shorter service life. Please contact ACE for appropriate solution suggestions. Do not paint the shock absorbers due to heat emission.


**On request:** Nickel-plated or weartec finish (seawater resistant) or other special finishes available to special order. Models without rod end button.

### SC190; 0 to 4

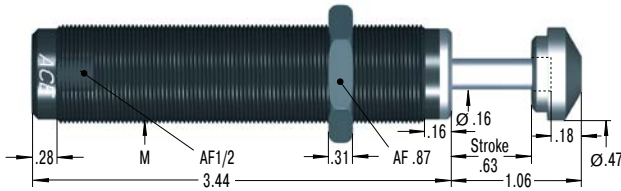


Product available for UNF and metric thread (for metric add suffix -M from part number)


### 250-0318 Mounting Block

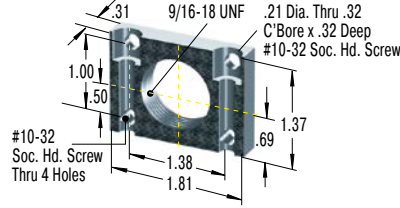

### 250-0352 Mounting Block




### SC300; 0 to 4

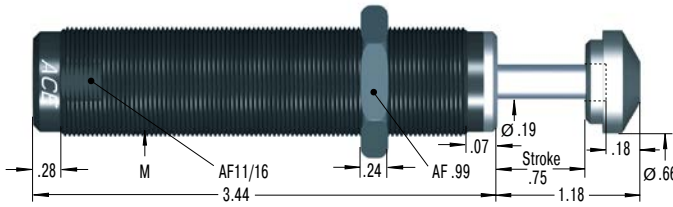


Product available for UNF and metric thread (for metric add suffix -M from part number)


### 250-0401 Mounting Block

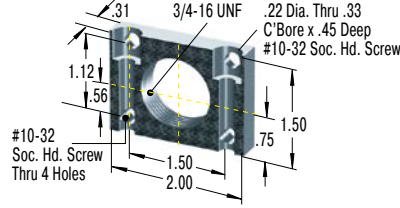

### 250-0353 Mounting Block




### SC650; 0 to 4

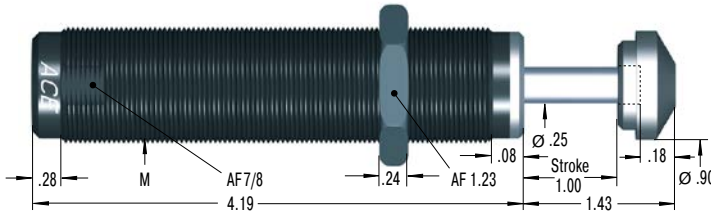


Product available for UNF and metric thread (for metric add suffix -M from part number)


### 250-0402 Mounting Block

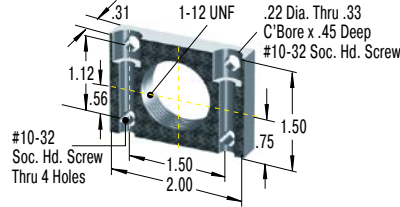

### 250-0044 Mounting Block




### SC925; 0 to 4

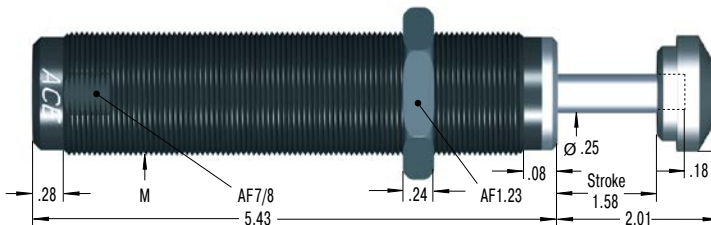


Product available for UNF and metric thread (for metric add suffix -M from part number)

### 250-0402 Mounting Block

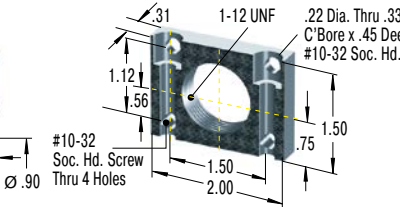

### 250-0044 Mounting Block



Additional accessories, mounting, installation ... starting on page 40.

### Performance

TYPES	Max. Energy Capacity		Effective Weight				Hardness	Return Force min. lbs	Return Force max. lbs	Return Time s	1 Side Load Angle max. °	M	Weight lbs
	E <sub>3</sub> in-lbs/cycle	E <sub>4</sub> in-lbs/h	Soft-Contact		Self-Compensating								
			We min. lbs	We max. lbs	We min. lbs	We max. lbs							
SC190-0	225	300,000	-	-	1	9	-0	0.9	1.9	0.25	5	9/16-18 UNF / M14x1.5	0.176
SC190-1	225	300,000	5	13	3	15	-1	0.9	1.9	0.25	5	9/16-18 UNF / M14x1.5	0.176
SC190-2	225	300,000	12	36	8	40	-2	0.9	1.9	0.25	5	9/16-18 UNF / M14x1.5	0.176
SC190-3	225	300,000	30	90	20	100	-3	0.9	1.9	0.25	5	9/16-18 UNF / M14x1.5	0.176
SC190-4	225	300,000	75	200	50	225	-4	0.9	1.9	0.25	5	9/16-18 UNF / M14x1.5	0.176
SC300-0	300	400,000	-	-	1	4	-0	1.05	2.15	0.1	5	3/4-16 UNF / M20x1.5	0.386
SC300-1	300	400,000	5	15	3	18	-1	1.05	2.15	0.1	5	3/4-16 UNF / M20x1.5	0.386
SC300-2	300	400,000	15	50	10	60	-2	1.05	2.15	0.1	5	3/4-16 UNF / M20x1.5	0.386
SC300-3	300	400,000	50	150	30	180	-3	1.05	2.15	0.1	5	3/4-16 UNF / M20x1.5	0.386
SC300-4	300	400,000	150	400	70	450	-4	1.05	2.15	0.1	5	3/4-16 UNF / M20x1.5	0.386
SC650-0	650	600,000	-	-	5	31	-0	2.4	6.87	0.20	5	1-12 UNF / M25x1.5	0.739
SC650-1	650	600,000	24	80	17	100	-1	2.4	6.87	0.20	5	1-12 UNF / M25x1.5	0.739
SC650-2	650	600,000	75	250	50	300	-2	2.4	6.87	0.20	5	1-12 UNF / M25x1.5	0.335
SC650-3	650	600,000	240	800	150	900	-3	2.4	6.87	0.20	5	1-12 UNF / M25x1.5	0.335
SC650-4	650	600,000	800	2,400	450	2,600	-4	2.4	6.87	0.20	5	1-12 UNF / M25x1.5	0.335
SC925-0	975	800,000	18	55	10	65	-0	2.4	7.4	0.40	5	1-12 UNF / M25x1.5	0.420
SC925-1	975	800,000	50	160	30	200	-1	2.4	7.4	0.40	5	1-12 UNF / M25x1.5	0.420
SC925-2	975	800,000	130	460	90	600	-2	2.4	7.4	0.40	5	1-12 UNF / M25x1.5	0.420
SC925-3	975	800,000	400	1,350	250	1,600	-3	2.4	7.4	0.40	5	1-12 UNF / M25x1.5	0.420
SC925-4	975	800,000	1,200	4,300	750	4,600	-4	2.4	7.4	0.40	5	1-12 UNF / M25x1.5	0.420

<sup>1</sup> For applications with higher side load angles consider using the side load adaptor, pages 44 to 51.

## SC<sup>2</sup>25 to SC<sup>2</sup>190

### Piston tube design for maximum energy absorption

#### Self-Compensating, Piston Tube Technology


**Energy capacity 89 in-lbs/Cycle to 274 in-lbs/Cycle**

**Stroke 0.32 in to 0.47 in**

Soft damping, but enormous capacity: The range of 'soft contact' absorbers SC<sup>2</sup>25 to SC<sup>2</sup>190 extends from thread size M10 to M14 and covers effective weight ranges of 2.2 to 3,400 lbs (1 kg to 1,550 kg). All models are characterised by high energy absorption and they also unite the piston tube technology with the diaphragm seal perfected by ACE. This enables direct installation as end position damping in pneumatic cylinders at 72 to 102 psi (5 to 7 bar) or applications where deceleration needs to take place close to the pivot point.

They are maintenance-free, have an integrated positive stop and are mountable in any position. The option of a side load adapter allows impact angles of up to 25°. They offer soft contact deceleration where initial impact reaction forces are very low, with the advantages of self-compensation to react to changing energy conditions, without adjustment.

Thanks to their robust design and their durability, these miniature shock absorbers can be used for a wide range of applications. Designers mainly use them for pick and place systems, pneumatic rotary modules and in automation applications.

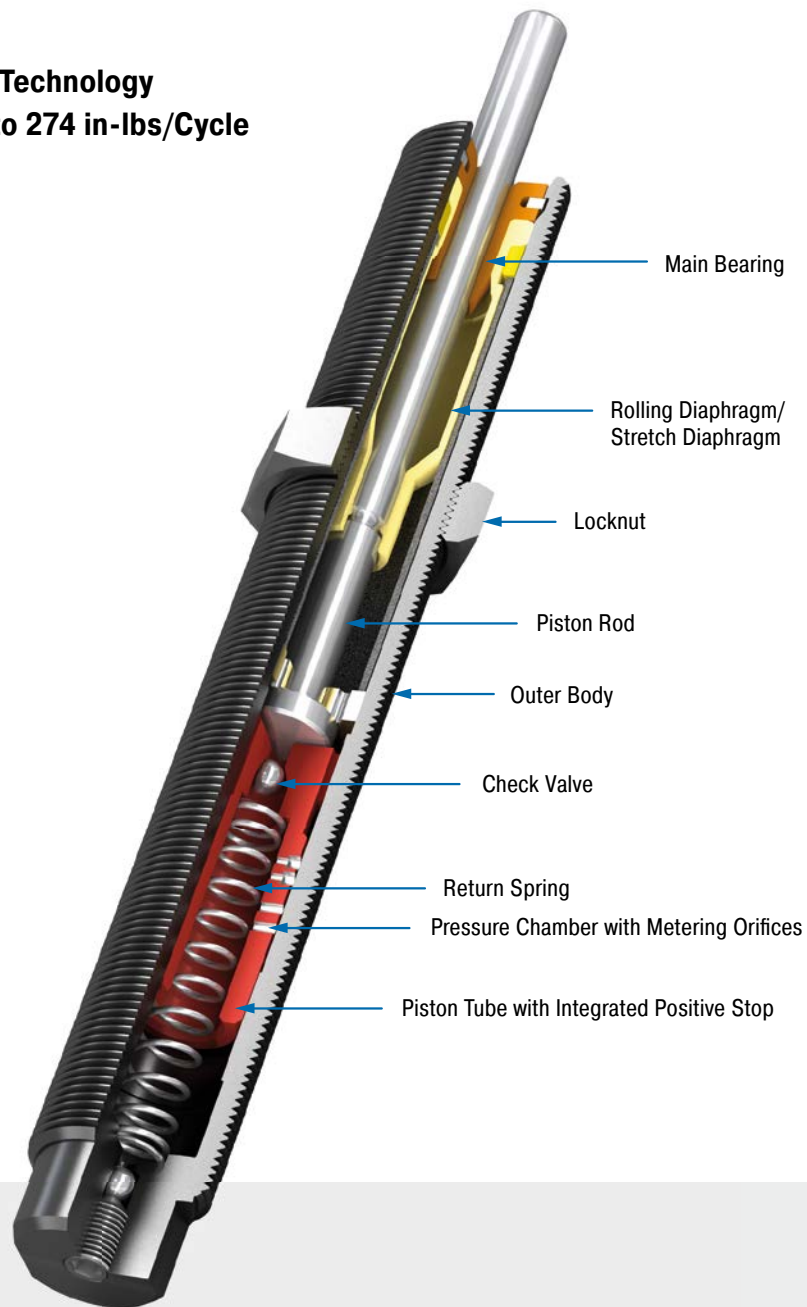

#### Technical Data

**Energy capacity:** 89 in-lbs/Cycle to 274 in-lbs/Cycle

**Impact velocity range:** 0.29 ft/sec to 18.6 ft/sec. Other speeds on request.

**Operating temperature range:** 32 °F to 150 °F

**Mounting:** In any position

**Positive stop:** Integrated

**Material:** Outer body, Accessories: Steel corrosion-resistant coating; Piston rod: Hardened stainless steel; Rolling diaphragm: SC<sup>2</sup>190: EPDM; Stretch diaphragm: SC<sup>2</sup>25 and SC<sup>2</sup>75: Nitrile

**Damping medium:** Oil, temperature stable

**Application field:** Linear slides, Pneumatic cylinders, Swivel units, Handling modules, Machines and plants, Finishing and processing centers, Measuring tables, Tool machines, Locking systems

**Note:** If precise end position data is required consider use of a stop collar.


**Safety information:** External materials in the surrounding area can attack the rolling and stretch seals and lead to a shorter service life. Please contact ACE for appropriate solution suggestions.

**On request:** Increased corrosion protection. Special finishes.




Self-Compensating, Piston Tube Technology


### SC25M; 5 to 7

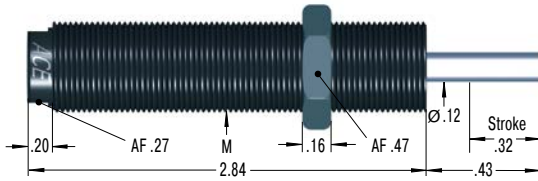


### 250-0315 Locknut




### 250-0307 Mounting Block




### SC75M; 5 to 7

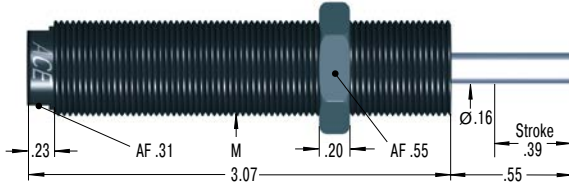


### 250-0317 Locknut



### 250-0309 Mounting Block



### SC190M; 5 to 7

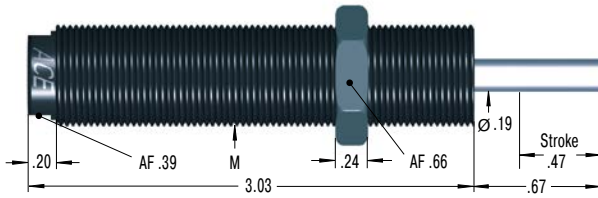


M14x1 also available to special order

### 250-0233 Locknut



### 250-0352 Mounting Block



Additional accessories, mounting, installation ... starting on page 40.

### Performance

TYPES	Max. Energy Capacity		Effective Weight			Return Force min. lbs	Return Force max. lbs	Return Time s	Side Load Angle max. °	M	Weight lbs
	E <sub>3</sub> in-lbs/cycle	E <sub>4</sub> in-lbs/h	We min. lbs	We max. lbs	Hardness						
SC25M-5	89	142,000	2	11	-5	0.90	3.07	0.3	2	M10x1	0.064
SC25M-6	89	142,000	9	97	-6	0.90	3.07	0.3	2	M10x1	0.064
SC25M-7	89	142,000	93	1,100	-7	0.90	3.07	0.3	2	M10x1	0.064
SC75M-5	142	266,000	2	18	-5	0.69	3.40	0.4	2	M12x1	0.104
SC75M-6	142	266,000	15	272	-6	0.69	3.40	0.4	2	M12x1	0.104
SC75M-7	142	266,000	165	1,760	-7	0.69	3.40	0.4	2	M12x1	0.104
SC190M-5	274	443,000	4	35	-5	0.97	5.57	0.4	2	M14x1.5	0.130
SC190M-6	274	443,000	29	309	-6	0.97	5.57	0.4	2	M14x1.5	0.130
SC190M-7	274	443,000	300	3,400	-7	0.97	5.57	0.4	2	M14x1.5	0.130

<sup>1</sup> For applications with higher side load angles consider using the side load adaptor, pages 44 to 51.

## SC<sup>2</sup>300 to SC<sup>2</sup>650

### Piston tube design for maximum energy absorption

#### Self-Compensating, Piston Tube Technology


**Energy capacity 650 in-lbs/Cycle to 1,860 in-lbs/Cycle**

**Stroke 0.59 in to 0.91 in**

Added safety with accumulator technology: The larger 'soft contact' models from the SC<sup>2</sup>300 to SC<sup>2</sup>650 are available with up to three times the energy absorption compared to similar sizes of standard shock absorbers SC190 to SC925, due to the ACE piston tube specialty. Furthermore, the membrane accumulator serves as a compensation element for the oil displaced in the shock absorber and replaces the standard use of absorber materials. This increases process safety even further.

The shock absorbers, which are perfect for rotary actuators for example, are available in progressively stepped effective weight ranges with an integrated positive stop. They are maintenance-free and ready for direct installation. The side load adapter option allows impact angles of up to 25°. They offer soft contact deceleration where initial impact reaction forces are very low, with the advantages of self-compensation to react to changing energy conditions, without adjustment.

These miniature shock absorbers offer high performance levels with a long service life and are particularly popular for material handling, mounting very close to pivots and automation tasks.

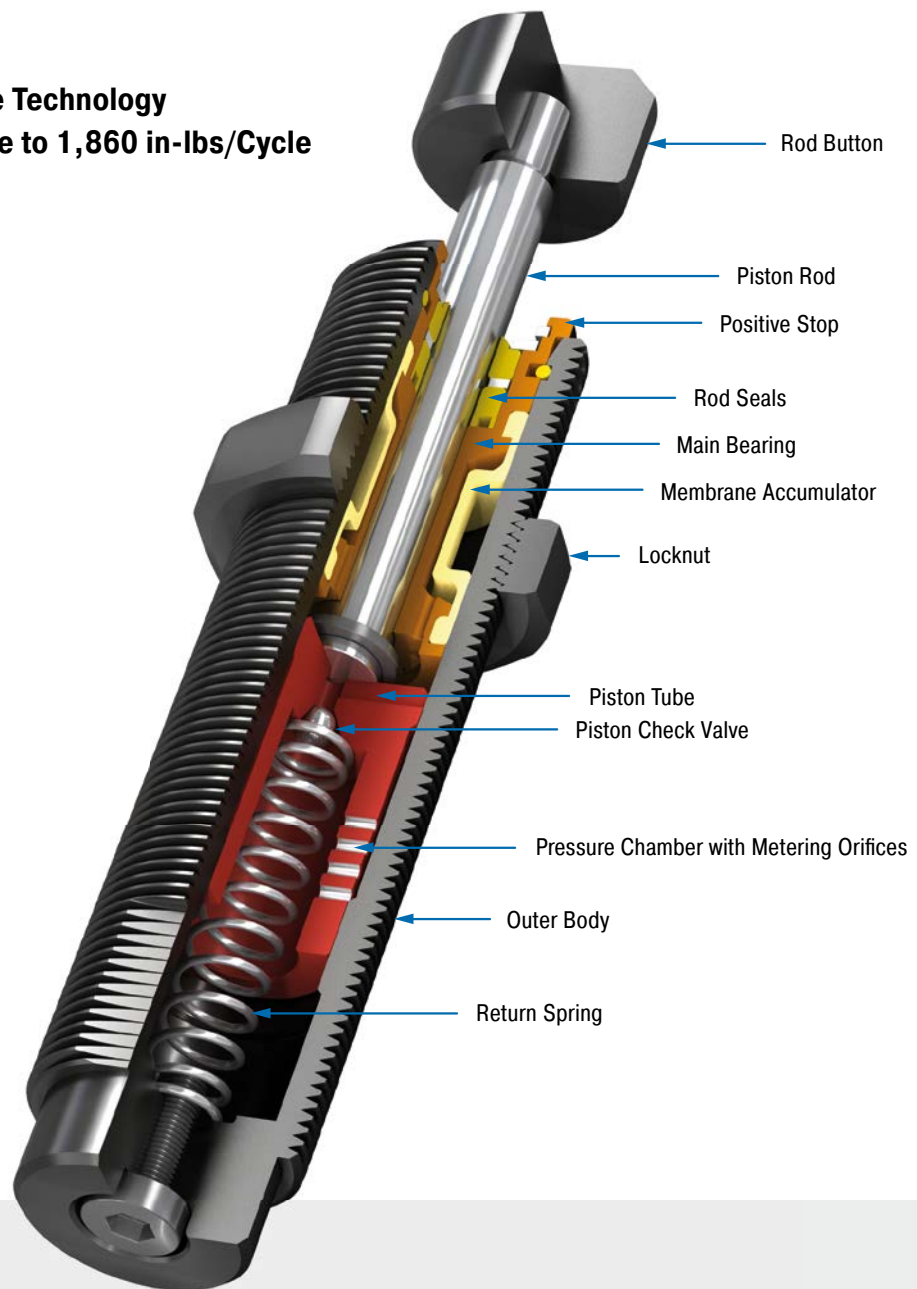

#### Technical Data

**Energy capacity:** 650 in-lbs/Cycle to 1,860 in-lbs/Cycle

**Impact velocity range:** 0.30 ft/sec to 12.0 ft/sec. Other speeds on request.

**Operating temperature range:** 32 °F to 150 °F

**Mounting:** In any position

**Positive stop:** Integrated

**Material:** Outer body: Steel corrosion-resistant coating; Piston rod: Hardened stainless steel; Accessories: Hardened steel and corrosion-resistant coating


**Damping medium:** Oil, temperature stable

**Application field:** Turntables, Swivel units, Robot arms, Linear slides, Pneumatic cylinders, Handling modules, Machines and plants, Finishing and processing centers, Tool machines

**Note:** If precise end position data is required consider use of a stop collar.

**On request:** Increased corrosion protection. Special finishes.


### SC300; 5 to 9

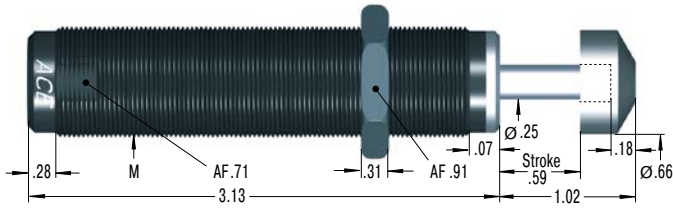

Product available for UNF and metric thread (for metric add suffix -M from part number)


### 250-0401

#### Mounting Block

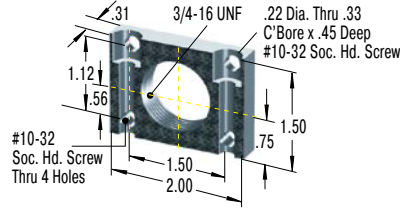


### 250-0353

#### Mounting Block




### SC650; 5 to 9

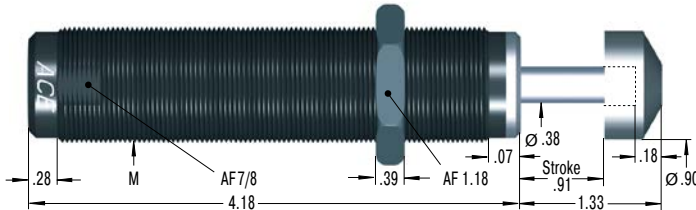

Product available for UNF and metric thread (for metric add suffix -M from part number)


### 250-0402

#### Mounting Block

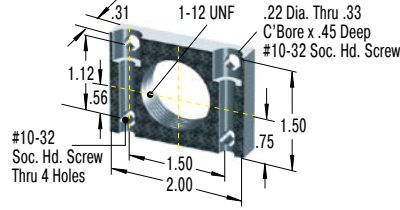

### 250-0044

#### Mounting Block



Additional accessories, mounting, installation ... starting on page 40.

### Performance

TYPES	Max. Energy Capacity		Effective Weight			Return Force min. lbs	Return Force max. lbs	Return Time s	1 Side Load Angle max. °	M	Weight lbs
	E <sub>3</sub> in-lbs/cycle	E <sub>4</sub> in-lbs/h	We min. lbs	We max. lbs	Hardness						
SC300-5	650	400,000	25	100	-5	1.70	4.00	0.2	5	3/4-16 UNF / M20x1.5	0.331
SC300-6	650	400,000	75	300	-6	1.70	4.00	0.2	5	3/4-16 UNF / M20x1.5	0.331
SC300-7	650	400,000	200	400	-7	1.70	4.00	0.2	5	3/4-16 UNF / M20x1.5	0.331
SC300-8	650	400,000	300	1,500	-8	1.70	4.00	0.2	5	3/4-16 UNF / M20x1.5	0.331
SC300-9	650	400,000	700	4,300	-9	1.70	4.00	0.2	5	3/4-16 UNF / M20x1.5	0.331
SC650-5	1,860	600,000	50	250	-5	2.40	7.30	0.3	5	1-12 UNF / M25x1.5	0.684
SC650-6	1,860	600,000	200	800	-6	2.40	7.30	0.3	5	1-12 UNF / M25x1.5	0.684
SC650-7	1,860	600,000	700	2,400	-7	2.40	7.30	0.3	5	1-12 UNF / M25x1.5	0.684
SC650-8	1,860	600,000	1,700	5,800	-8	2.40	7.30	0.3	5	1-12 UNF / M25x1.5	0.684
SC650-9	1,860	600,000	4,000	14,000	-9	2.40	7.30	0.3	5	1-12 UNF / M25x1.5	0.684

<sup>1</sup> For applications with higher side load angles consider using the side load adaptor, pages 44 to 51.

## SC25-HC to SC650-HC

### Miniature self compensating shocks for high-speed applications

#### Self-Compensating


**Energy capacity 20 in-lbs/Cycle to 1200 in-lbs/Cycle**

**Stroke 0.16 in to 0.59 in**

ACE Controls SC25-HC to SC650-HC High-Cycle shock absorbers are engineered for high-speed equipment applications. These rugged performers are ideal for the packaging industry. They offer a short stroke, quick time through stroke and quick rod-ready time. In addition, these dependable self-compensating miniatures are capable of rapid repeat strokes. The result is faster cycling for your equipment and gains in production time for you.

Self-compensating shock absorbers react to changing energy conditions, without adjustment.

These miniature, self-compensating shock absorbers provide high-speed performance and reliability in a compact footprint. Applications include: Packaging equipment, slides, rotary actuators, small and medium robotics, machine tools, pick and place operations and more.

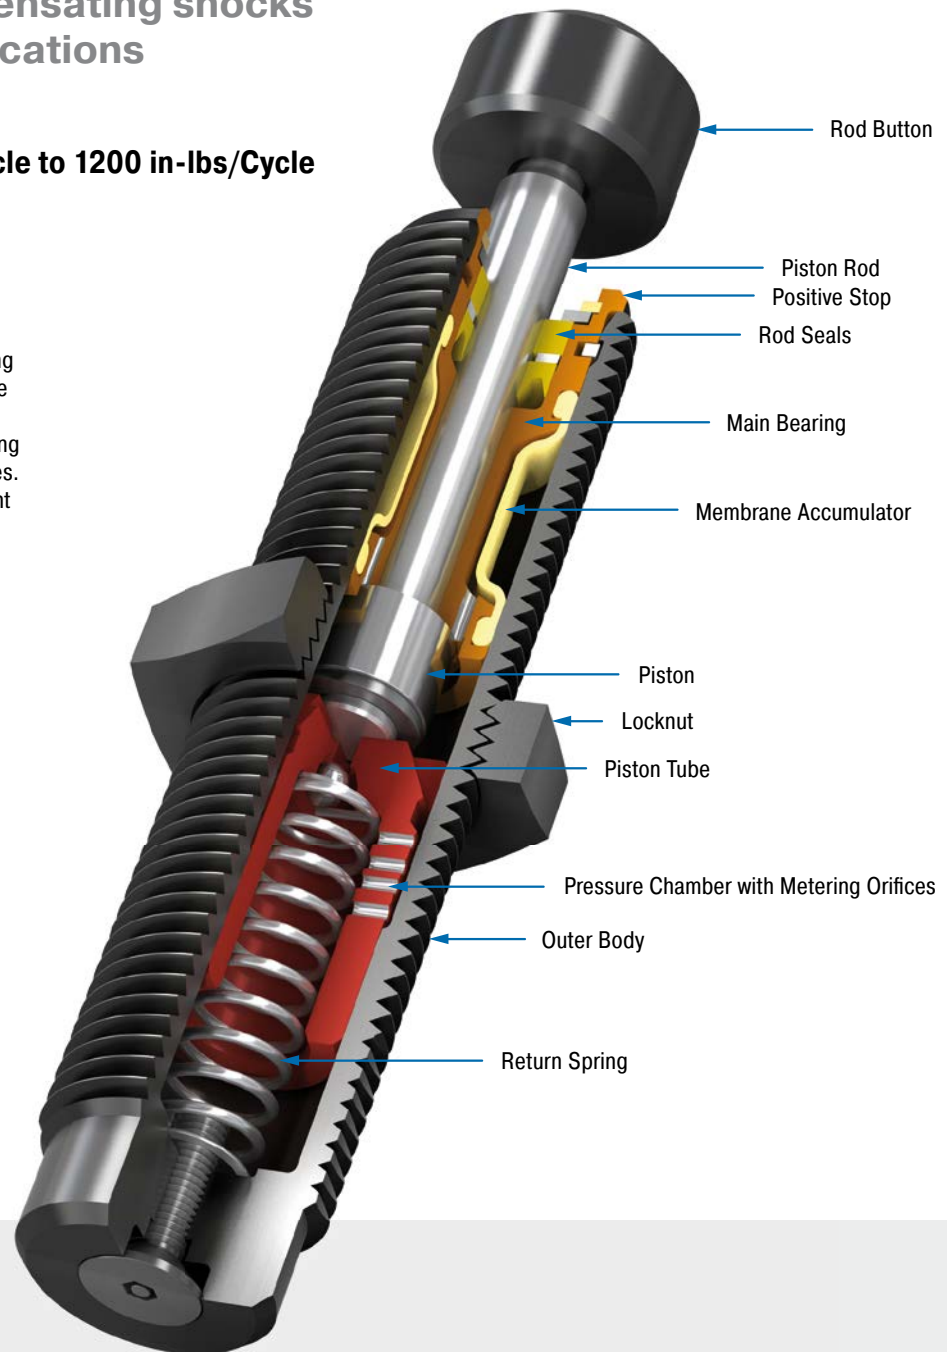

#### Technical Data

**Energy capacity:** 20 in-lbs/Cycle to 1200 in-lbs/Cycle

**Impact velocity range:** 0.09 ft/sec to 14.60 ft/sec

**Operating temperature range:** 32 °F to 150 °F

**Mounting:** In any position

**Positive stop:** Integrated

**Material:** Outer body: Steel corrosion-resistant coating; Main bearing: Brass; Piston rod: Steel hardened; Locknut, Accessories: Steel; Rolling diaphragm: Rubber (EPDM); Stretch diaphragm: Rubber (nitrile)

**Damping medium:** SF 96-500 and others


**Application field:** Linear slides, Tool machines, Handling modules, Production plants

**Note:** If precise end position is required, consider use of the optional stop collar.


**Safety information:** External materials in the surrounding area can attack the accumulator and lead to a shorter service life. Please contact ACE for appropriate solution suggestions. Suitable for use in pressure chambers up to 102 psi.

**On request:** Food grade oils, special threads available on request.


### SC25M-HC

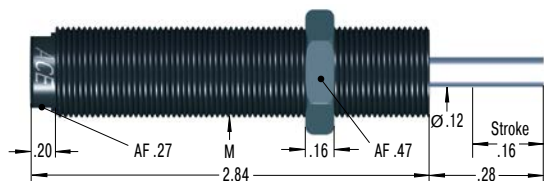


### 250-0307 Mounting Block




### SC75M-HC

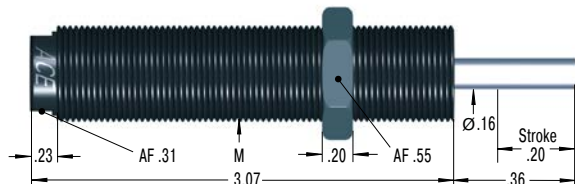


### 250-0309 Mounting Block



### SC190M-HC

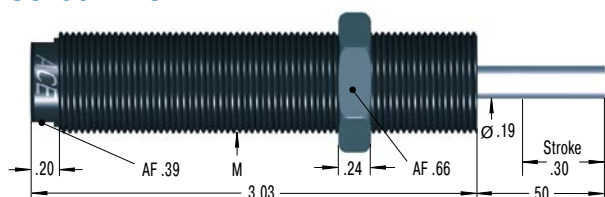


### 250-0352 Mounting Block




M14x1 also available to special order

### SC300-HC

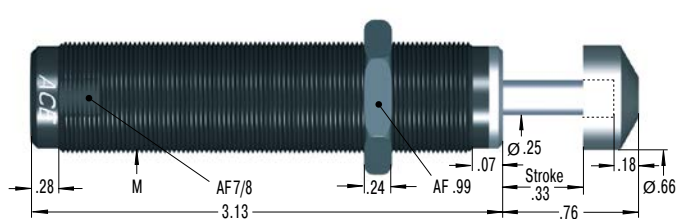


Product available for UNF and metric thread (for metric add suffix -M from part number)


### 250-0401 Mounting Block

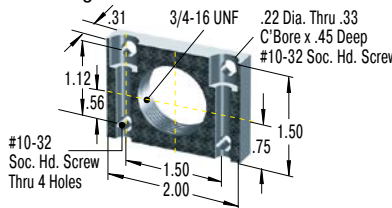

### 250-0353 Mounting Block




### SC650-HC

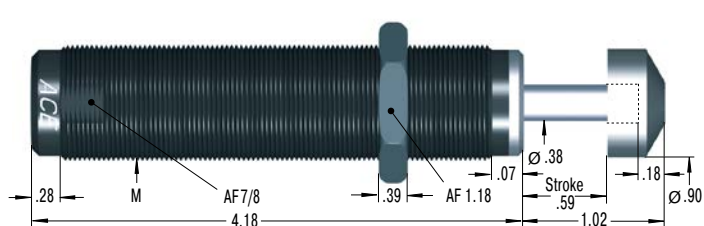


Product available for UNF and metric thread (for metric add suffix -M from part number)

### 250-0402 Mounting Block

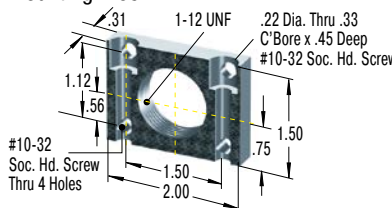

### 250-0044 Mounting Block



Additional accessories, mounting, installation ... starting on page 40.

### Performance

TYPES	Max. Energy Capacity		Effective Weight		Return Force min. lbs	Return Force max. lbs	Return Time s	Side Load Angle max. °	M	Weight lbs
	E <sub>3</sub> in-lbs/cycle	Energy capacity in-lbs/h	We min. lbs	We max. lbs						
SC25M-5-HC	20	142,000	2	11	1.98	3.08	0.2	2	M10x1	0.066
SC25M-6-HC	20	142,000	9	97	1.98	3.08	0.2	2	M10x1	0.066
SC25M-7-HC	20	142,000	93	1,100	1.98	3.08	0.2	2	M10x1	0.066
SC75M-5-HC	75	266,000	2	18	1.94	3.40	0.3	2	M12x1	0.099
SC75M-6-HC	75	266,000	15	272	1.94	3.40	0.3	2	M12x1	0.099
SC75M-7-HC	75	266,000	165	1,760	1.94	3.40	0.3	2	M12x1	0.099
SC190M-5-HC	175	443,000	4	35	2.67	5.57	0.3	2	M14x1.5	0.130
SC190M-6-HC	175	443,000	29	309	2.67	5.57	0.3	2	M14x1.5	0.130
SC190M-7-HC	175	443,000	300	3,400	2.67	5.57	0.3	2	M14x1.5	0.130
SC300-5-HC	650	400,000	25	100	2.63	3.91	0.2	5	3/4-16 UNF / M20x1.5	0.362
SC300-6-HC	650	400,000	75	300	2.63	3.91	0.2	5	3/4-16 UNF / M20x1.5	0.362
SC300-7-HC	650	400,000	200	400	2.63	3.91	0.2	5	3/4-16 UNF / M20x1.5	0.362
SC300-8-HC	650	400,000	300	1,500	2.63	3.91	0.2	5	3/4-16 UNF / M20x1.5	0.362
SC300-9-HC	650	400,000	700	4,300	2.63	3.91	0.2	5	3/4-16 UNF / M20x1.5	0.362
SC650-5-HC	1,200	600,000	50	250	4.94	8.30	0.2	5	1-12 UNF / M25x1.5	0.695
SC650-6-HC	1,200	600,000	200	800	4.94	8.30	0.2	5	1-12 UNF / M25x1.5	0.695
SC650-7-HC	1,200	600,000	700	2,400	4.94	8.30	0.2	5	1-12 UNF / M25x1.5	0.695
SC650-8-HC	1,200	600,000	1,700	5,800	4.94	8.30	0.2	5	1-12 UNF / M25x1.5	0.695
SC650-9-HC	1,200	600,000	4,000	14,000	4.94	8.30	0.2	5	1-12 UNF / M25x1.5	0.695

<sup>1</sup> For applications with higher side load angles consider using the side load adaptor, pages 44 to 51.

## MA30 to MA900

### Stepless adjustment

#### Adjustable


**Energy capacity 31 in-lbs/Cycle to 900 in-lbs/Cycle**

**Stroke 0.28 in to 1.58 in**

The miniature shock absorbers from the MA30 to MA900 product family can be adjusted and precisely adapted to your requirements. For example, the MA150 displays the rolling diaphragm technology from the MC150 to MC600 family and offers all of the advantages of this technology, such as use in pressure chambers. Thanks to long strokes (including 1.57 in on the MA900) lower reaction forces result, which provide a soft damping characteristic.

All variations of these units are maintenance-free, ready-to-install machine elements and have an integrated positive stop. They provide the best service where application data changes, where the calculation parameters are not clear or where maximum flexibility in the possible usage is required.

These adjustable miniature shock absorbers from ACE can be used to precisely meet the customer's application needs and are therefore found everywhere in industrial, automation and machine engineering and many other applications.

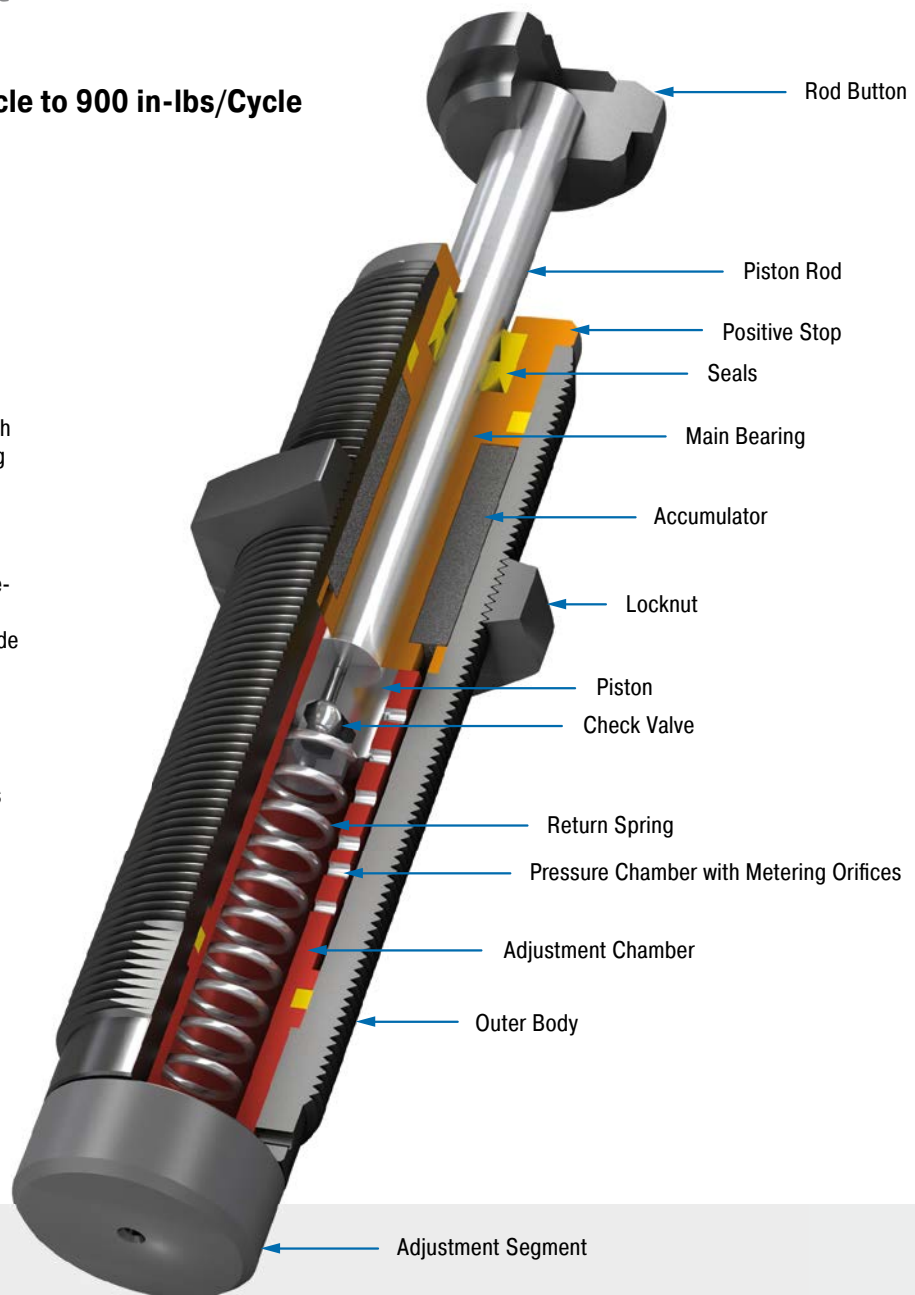

#### Technical Data

**Energy capacity:** 31 in-lbs/Cycle to 900 in-lbs/Cycle

**Impact velocity range:** 0.5 ft/sec to 14.6 ft/sec. Other speeds on request.

**Operating temperature range:** 32 °F to 150 °F

**Mounting:** In any position

**Positive stop:** Integrated

**Adjustment:** Hard impact at the start of stroke, adjust the ring towards 9 or PLUS. Hard impact at the end of stroke, adjust the ring towards 0 or MINUS.

**Material:** Outer body, Accessories: Steel corrosion-resistant coating; Piston rod: Hardened stainless steel

**Damping medium:** Oil, temperature stable

**Application field:** Linear slides, Pneumatic cylinders, Swivel units, Handling modules, Machines and plants, Finishing and processing centers, Automatic machinery, Tool machines, Locking systems


**Note:** If precise end position data is required consider use of a stop collar. Shock absorber is preset at delivery in a neutral position between hard and soft.

**Safety information:** External materials in the surrounding area can attack the seal components and lead to a shorter service life. Please contact ACE for appropriate solution suggestions. Do not paint the shock absorbers due to heat emission.


**On request:** Nickel-plated or other special options available to special order. Models without rod end button.




### MA30M

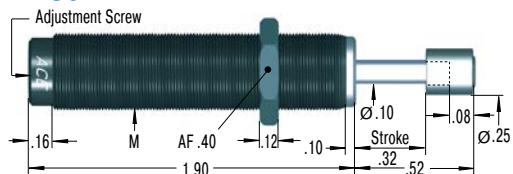

### MA50M

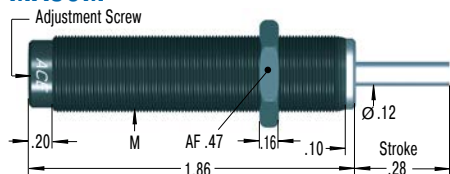


### MA35

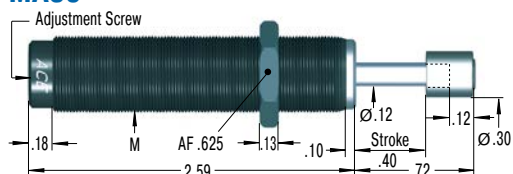


Product available for UNF and metric thread (for metric add suffix -M from part number)

### MA150

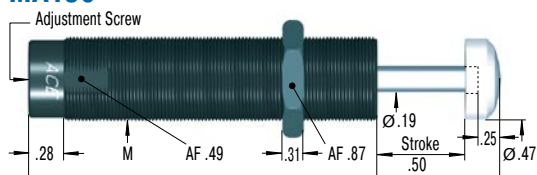


Product available for UNF and metric thread (for metric add suffix -M from part number) M14x1 also available to special order. Standard shock does not include button.

### MA225

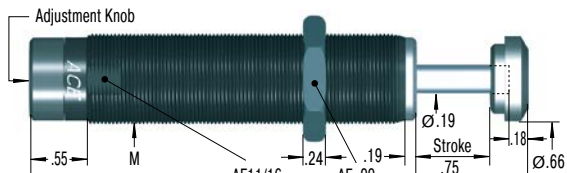


Product available for UNF and metric thread (for metric add suffix -M from part number)

### MA600

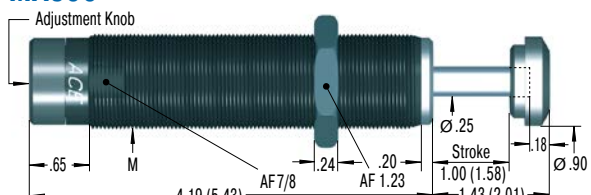


Product available for UNF and metric thread (for metric add suffix -M from part number) Dimensions for MA900M in ( ).


### 250-0307




### 250-0308

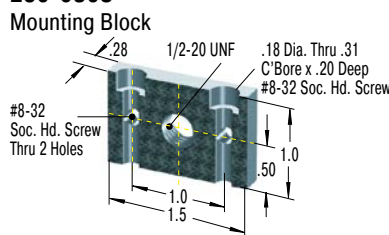


### 250-0309




### 250-0318

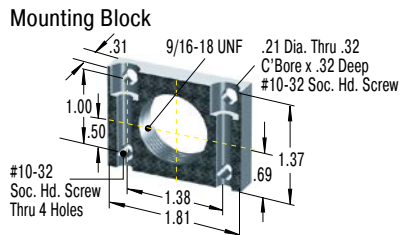


### 250-0352




### 250-0401

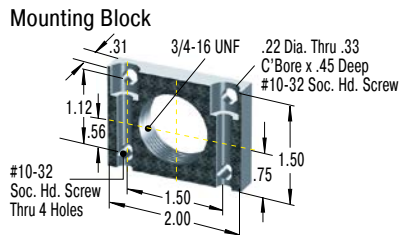


### 250-0353



### 250-0402

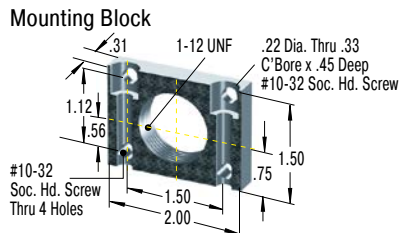

### 250-0044



Additional accessories, mounting, installation ... starting on page 40.

### Performance

TYPES	Max. Energy Capacity		Effective Weight		Return Force min. lbs	Return Force max. lbs	Return Time s	Side Load Angle max. °	M	Weight lbs
	E <sub>3</sub> in-lbs/cycle	E <sub>4</sub> in-lbs/h	We min. lbs	We max. lbs						
MA30M	31	50,000	0.5	31	1.16	1.57	0.3	2	M8x1	0.029
MA50M	50	120,000	10	45	0.47	1.80	0.3	2	M10x1	0.055
MA35	35	53,000	13	125	1.20	2.60	0.2	2	1/2-20 UNF / M12x1	0.095
MA150	200	300,000	2	240	0.70	1.20	0.4	2	9/16-18 UNF / M14x1.5	0.135
MA225	300	400,000	5	500	1.05	2.15	0.1	2	3/4-16 UNF / M20x1.5	0.381
MA600	600	600,000	20	3,000	2.40	6.87	0.2	2	1-12 UNF / M25x1.5	0.776
MA900	900	800,000	30	4,500	2.40	7.40	0.4	1	1-12 UNF / M25x1.5	0.913

<sup>1</sup> For applications with higher side load angles consider using the side load adaptor, pages 44 to 51.

# 3/8x1

## Miniature adjustable shock delivers convenience


### Adjustable

**Energy capacity 600 in-lbs/Cycle**

**Stroke 1 in**

ACE Controls 3/8x1" bore adjustable miniature shock absorber offers high energy capacity and a wide effective weight range for handling a variety of applications. A unique feature of the multi-orifice 3/8x1" bore is the optional rear slot adjuster. Adjustment can be made by turning the front adjuster to the preferred setting, or by turning the rear slot adjuster if desired.

Available with side or rear adjustment, these 1" bore shock absorbers provide performance and convenience in one reliable package. Applications include: Slides, material handling equipment, robotics, machine tools, pick and place systems, packaging equipment and more.

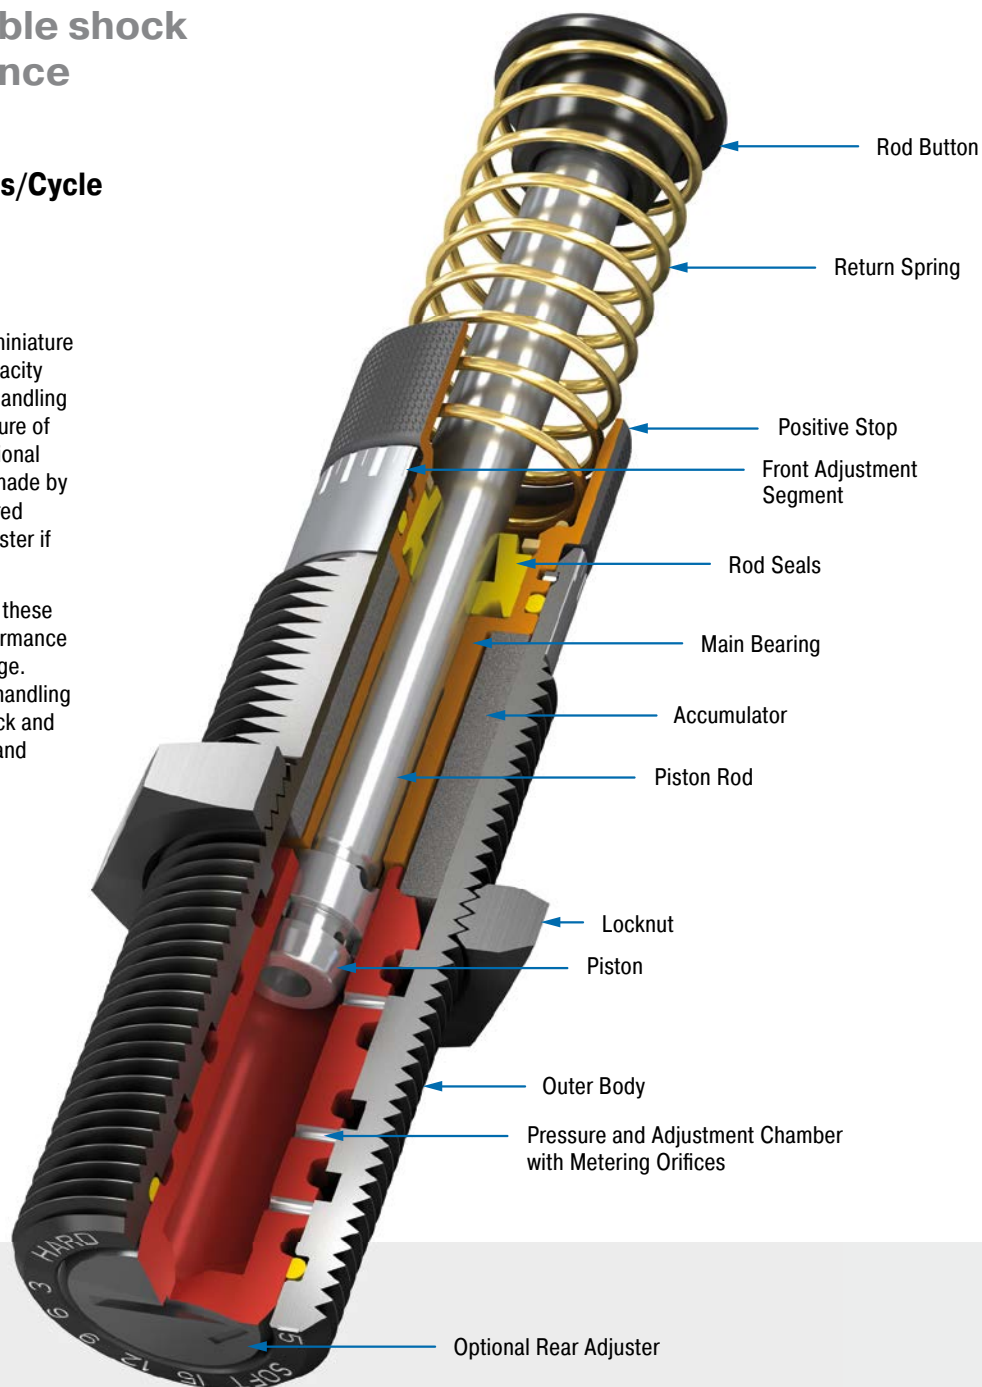

### Technical Data

**Energy capacity:** 600 in-lbs/Cycle

**Impact velocity range:** 1.6 ft/sec to 15 ft/sec

**Operating temperature range:** 10 °F to 150 °F

**Mounting:** In any position. Clevis mounting available (NA 3/8x1)

**Adjustment:** Adjustment can be made by turning the front adjuster to the preferred setting, or by turning the rear slot adjuster if desired.

**Material:** Outer body, Accessories: Steel corrosion-resistant coating; Main bearing, Rod end button: Steel hardened; Piston rod: Steel hardened and chrome plated; Return spring: Steel; Locknut: Zinc plated steel

**Damping medium:** American 46

**Application field:** Linear slides, Transport industry, Tool machines, Handling modules, Production plants

**Note:** Maximum side load depends on application. For additional information contact ACE Controls' Applications Department. Lock nut included with each shock absorber.


**Safety information:** External materials in the surrounding area can attack the seal components and lead to a shorter service life. Please contact ACE for appropriate solution suggestions. Do not paint the shock absorbers due to heat emission.

**On request:** Increased corrosion protection. Special finishes. Models without rod end button also available on request.




Adjustable

### AS3/8x1

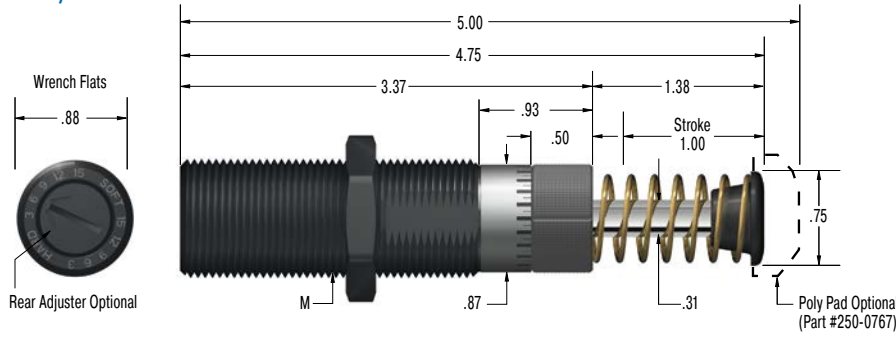


### 250-0402

#### Mounting Block

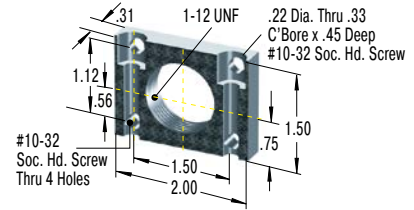


### NA3/8x1

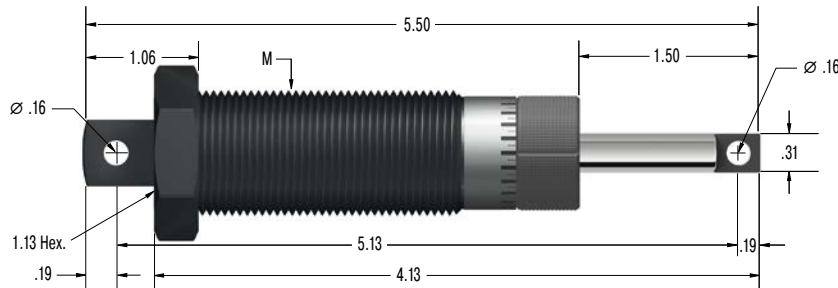

### 250-0402

#### Mounting Block

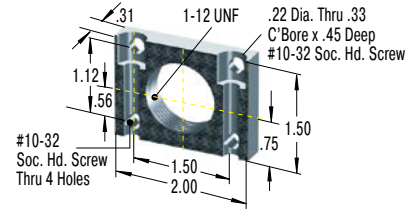

Accessories, mounting, installation ... starting on page 40.

Issue 04.2018 – Specifications subject to change

### Performance

TYPES	Max. Energy Capacity		Effective Weight		Return Force min. lbs	Return Force max. lbs	Return Time s	Side Load Angle max. °	M	Weight lbs
	$E_3$ in-lbs/cycle	Energy capacity in-lbs/h	We min. lbs	We max. lbs						
AS3/8x1	600	600,000	10	1,250	6	11	0.03	5	1-12 UNF	0.437
NA3/8x1	600	600,000	10	1,250	6	11	0.03	5	N/A	0.437

<sup>1</sup> For applications with higher side load angles consider using the side load adaptor, pages 44 to 51.

## Selection Chart



Shock Absorber Type	<sup>1</sup> Locknut	<sup>2</sup> Stop Collar	Mounting Block	<sup>3</sup> Side Load Adaptor
<b>Thread M5x0.5</b>				
MC5M	0801-001	-	-	-
<b>Thread M6x0.5</b>				
MC9M	250-0716	-	-	-
<b>Thread M8x1</b>				
MA30M	250-0482	-	-	250-0146
MC10M	250-0482	-	-	250-0141
MC30M	250-0482	-	-	250-0146
<b>Thread M10x1</b>				
MA50M	250-0315	250-0408	250-0307	250-0562
MC25M	250-0315	250-0408	250-0307	250-0562
SC25M; 5 to 7	250-0315	250-0408	250-0307	-
SC25M-HC	250-0315	250-0408	250-0307	-
<b>Thread M12x1</b>				
MA35M	250-0317	250-0409	250-0309	250-0760
MC75M	250-0317	250-0409	250-0309	250-0760
SC75M; 5 to 7	250-0317	250-0409	250-0309	250-0145
SC75M-HC	250-0317	250-0409	250-0309	-
<b>Thread M14x1.5</b>				
MA150M	250-0233	250-0272	250-0352	250-0558
MC150M	250-0233	250-0272	250-0352	250-0558
MC150M-V4A	250-0441	250-0243	250-0255	-
PMCN150M	250-0233	-	250-0352	-
PMCN150M-V4A	250-0441	-	250-0255	-
SC190M; 0 to 4	250-0233	250-0272	250-0352	250-0080
SC190M; 5 to 7	250-0233	250-0272	250-0352	250-0558
SC190M-HC	250-0233	250-0272	250-0352	-
<b>Thread M20x1.5</b>				
MA225M	250-0207	250-0410	250-0353	250-0081
MC225M	250-0207	250-0410	250-0353	250-0559
MC225M-V4A	250-0442	250-0253	250-0434	-
PMCN225M	250-0207	-	250-0353	-
PMCN225M-V4A	250-0442	-	250-0434	-
SC300M; 0 to 4	250-0207	250-0410	250-0353	250-0081
SC300M; 5 to 9	250-0207	250-0410	250-0353	-
SC300M-HC	250-0207	250-0410	250-0353	-
<b>Thread M25x1.5</b>				
AS3/8x1M	250-0040	250-0766	250-0044	-
MA600M	250-0040	250-0276	250-0044	250-0082
MA900M	250-0040	250-0276	250-0044	250-0082
MC600M	250-0040	250-0276	250-0044	250-0560
MC600M-V4A	250-0443	250-0254	250-0436	-
PMCN600M	250-0040	-	250-0044	-
PMCN600M-V4A	250-0443	-	250-0436	-
SC650M; 0 to 4	250-0040	250-0276	250-0044	250-0082
SC650M; 5 to 9	250-0040	250-0276	250-0044	-
SC650M-HC	250-0040	250-0276	250-0044	-
SC925M; 0 to 4	250-0040	250-0276	250-0044	-

<sup>1</sup> Additional special options: Locknut 250-0362 for the MC10ME (extra fine thread), locknut 250-0232 for the MA/MC150E (extra fine thread), locknut 250-0239 for the MC600ML (extra fine thread).

<sup>2</sup> Additional special options: Stop Collar 250-0263 for the MC600ML (extra fine thread).

<sup>3</sup> Only mountable on units without button. Remove the button from the shock absorber, if there's one fitted!

The following side load adaptors fit -880 model shock absorbers: 250-0080, -0081, -0082, -0141, -0145, -0562, -0760, -0762 and -0763.

Dimensions can be found on the corresponding accessories pages.


**Steel Shroud**
**Steel Button**
**Steel/Urethane Button**
**Nylon Button**
**Page**

Thread	Steel Shroud	Steel Button	Steel/Urethane Button	Nylon Button	Page
Thread M5x0.5	-	-	-	-	44
Thread M6x0.5	-	-	-	-	44
Thread M8x1	250-0832	-	250-0764	-	44
	250-0833	-	-	-	44
	250-0832	-	250-0764	-	44
Thread M10x1	250-0834	250-0124	-	-	44
	250-0834	250-0124	250-0094	-	44
	250-0835	250-0175	-	-	44
	250-0835	250-0175	-	-	44
Thread M12x1	250-0836	250-0786	250-0094	-	45
	250-0836	250-0786	250-0094	-	45
	250-0837	250-0174	-	-	45
	250-0837	250-0174	-	-	45
Thread M14x1.5	250-0733	250-0111	250-0095	-	45
	250-0733	250-0111	250-0095	250-0753	45
	-	-	-	250-0753	45
	-	-	-	-	45
	-	-	-	-	45
	250-0785	included	250-0096	-	45
	250-0733	250-0111	250-0095	-	45
	250-0733	250-0111	250-0095	-	45
Thread M20x1.5	250-0734	included	250-0098	-	46
	250-0170	250-0112	250-0097	250-0754	46
	-	-	-	250-0754	46
	-	-	-	-	46
	-	-	-	-	46
	250-0734	included	250-0098	-	46
	250-0734	included	250-0105	-	46
	250-0734	included	250-0105	-	46
Thread M25x1.5	-	-	250-0099	-	47
	250-0765	included	250-0100	-	47
	250-0765	included	250-0100	-	47
	250-0171	10721-000	250-0099	250-0755	47
	-	-	-	250-0755	47
	-	-	-	-	47
	-	-	-	-	47
	250-0765	included	250-0100	-	47
	250-0171	included	250-0099	-	47
	250-0171	included	250-0099	-	47
	-	included	250-0100	-	47

## Selection Chart



Shock Absorber Type	Locknut	Stop Collar	Mounting Block	<sup>1</sup> Side Load Adaptor
<b>Thread 3/8-32 UNF</b>				
MC25	250-0404	250-0406	250-0306	–
<b>Thread 1/2-20 UNF</b>				
MA35	250-0405	250-0407	250-0308	–
MC75	250-0405	250-0407	250-0308	250-0762
<b>Thread 9/16-18 UNF</b>				
MA150	250-0231	250-0271	250-0318	250-0554
MC150	250-0231	250-0271	250-0318	250-0554
SC190; 0 to 4	250-0231	250-0271	250-0318	–
<b>Thread 3/4-16 UNF</b>				
MA225	250-0399	250-0403	250-0401	250-0561
MC225	250-0399	250-0403	250-0401	250-0561
SC300; 0 to 4	250-0399	250-0403	250-0401	–
SC300; 5 to 9	250-0399	250-0403	250-0401	–
SC300-HC	250-0399	250-0403	250-0401	–
<b>Thread 1-12 UNF</b>				
AS3/8x1	250-0400	250-0774	250-0402	–
MA600	250-0400	250-0275	250-0402	–
MA900	250-0400	250-0275	250-0402	–
MC600	250-0400	250-0275	250-0402	250-0763
NA3/8x1	250-0400	250-0774	250-0402	–
SC650; 0 to 4	250-0400	250-0275	250-0402	–
SC650; 5 to 9	250-0400	250-0275	250-0402	–
SC650-HC	0801-041	250-0275	250-0402	–
SC925; 0 to 4	250-0400	250-0275	250-0402	–

<sup>1</sup> Only mountable on units without button. Remove the button from the shock absorber, if there's one fitted!

The following side load adaptors fit -880 model shock absorbers: 250 -0080, -0081, -0082, -0141, -0145, -0562, -0760, -0762 and -0763.

Dimensions can be found on the corresponding accessories pages.



**Steel Shroud**

**Steel Button**

**Steel/Urethane Button**

**Nylon Button**


**Page**

Thread	Steel Shroud	Steel Button	Steel/Urethane Button	Nylon Button	Page
Thread 3/8-32 UNF	250-0834	250-0124	250-0094	–	48
Thread 1/2-20 UNF	– 250-0836	250-0786 250-0786	250-0094 250-0094	–	48 48
Thread 9/16-18 UNF	250-0733 250-0785 250-0733	250-0111 250-0111 included	250-0095 250-0095 250-0096	– 250-0753 –	48 48 48
Thread 3/4-16 UNF	250-0734 250-0170 250-0734 250-0734 250-0734	included 250-0112 included included included	250-0098 250-0097 250-0098 250-0105 250-0105	– 250-0754 – – –	49 49 49 49 49
Thread 1-12 UNF	– 250-0765 – 250-0171 – 250-0765 250-0171 250-0171 –	included included included 10721-000 included included included included included	250-0099 250-0100 250-0100 250-0099 250-0099 250-0100 250-0099 250-0099 250-0100	– – – 250-0755 – – – – –	49 49 49 49 49 49 49 49 49

Selection Chart See Pages 40 to 41


**M5x0.5**

**0801-001**  
Locknut




**M6x0.5**

**250-0716**  
Locknut




**M8x1**


**250-0482**  
Locknut




**250-0362**  
Locknut




**250-0141**  
Side Load Adaptor

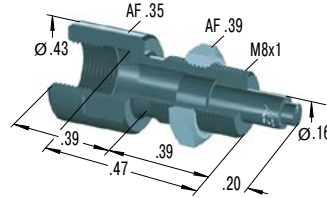


**250-0146**  
Side Load Adaptor

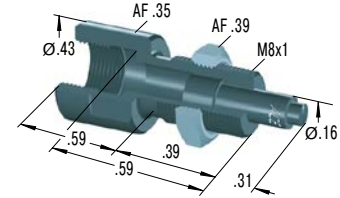


**250-0832**  
Steel Shroud



**250-0833**  
Steel Shroud




**250-0764**  
Steel/Urethane Button




**M10x1**


**250-0315**  
Locknut




**250-0408**  
Stop Collar




**250-0307**  
Mounting Block




**250-0562**  
Side Load Adaptor

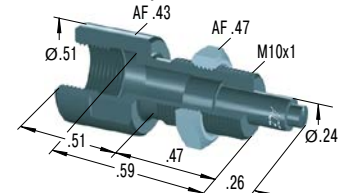


**250-0834**  
Steel Shroud




**250-0835**  
Steel Shroud




**250-0124**  
Steel Button



**250-0175**  
Steel Button




**250-0094**  
Steel/Urethane Button




Mounting, installation, ... see pages 50 to 51.

### M12x1


**250-0317**  
Locknut




**250-0409**  
Stop Collar




**250-0309**  
Mounting Block




**250-0145**  
Side Load Adaptor




**250-0760**  
Side Load Adaptor




**250-0836**  
Steel Shroud




**250-0837**  
Steel Shroud




**250-0174**  
Steel Button



**250-0786**  
Steel Button




**250-0094**  
Steel/Urethane Button




### M14x1


**250-0232**  
Locknut




**250-0233**  
Locknut




**250-0441**  
Locknut




**250-0243**  
Stop Collar




**250-0272**  
Stop Collar




**250-0255**  
Mounting Block




**250-0352**  
Mounting Block




**250-0080**  
Side Load Adaptor

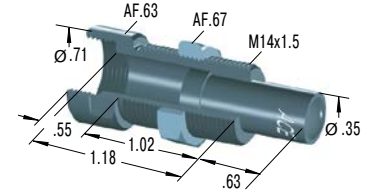


**250-0558**  
Side Load Adaptor

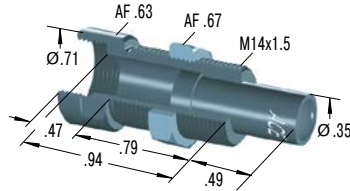


**250-0733**  
Steel Shroud




**250-0785**  
Steel Shroud




**250-0111**  
Steel Button




**250-0095**  
Steel/Urethane Button



**250-0096**  
Steel/Urethane Button



**250-0753**  
Nylon Button




Issue 04.2018 – Specifications subject to change

Mounting, installation, ... see pages 50 to 51.


Selection Chart See Pages 40 to 41

**M20x1.5**


**250-0207**  
Locknut




**250-0442**  
Locknut




**250-0253**  
Stop Collar




**250-0410**  
Stop Collar




**250-0353**  
Mounting Block




**250-0434**  
Mounting Block




**250-0081**  
Side Load Adaptor




**250-0559**  
Side Load Adaptor

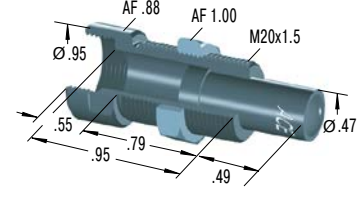


**250-0170**  
Steel Shroud




**250-0734**  
Steel Shroud




**250-0112**  
Steel Button




**250-0097**  
Steel/Urethane Button




**250-0098**  
Steel/Urethane Button



**250-0105**  
Steel/Urethane Button



**250-0754**  
Nylon Button




E<sub>3</sub> max = 292.07 lbs

Mounting, installation, ... see pages 50 to 51.




### M25x1.5


**250-0040**  
Locknut




**250-0443**  
Locknut




**250-0254**  
Stop Collar




**250-0263**  
Stop Collar




**250-0276**  
Stop Collar




**250-0766**  
Stop Collar




**250-0044**  
Mounting Block




**250-0436**  
Mounting Block




**250-0082**  
Side Load Adaptor




**250-0560**  
Side Load Adaptor

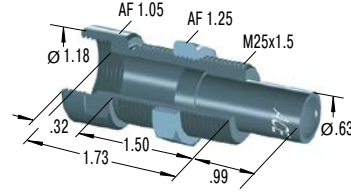


**250-0171**  
Steel Shroud




**250-0765**  
Steel Shroud




**10721-000**  
Steel Button




**250-0099**  
Steel/Urethane Button



**250-0100**  
Steel/Urethane Button



**250-0755**  
Nylon Button




E<sub>s</sub> max = 601.85 lbs


Selection Chart See Pages 42 to 43

**3/8-32 UNF**


**250-0404**  
Locknut




**250-0406**  
Stop Collar




**250-0306**  
Mounting Block

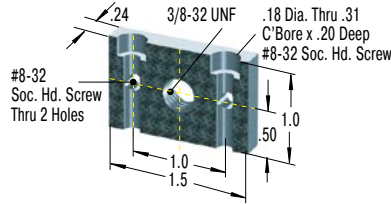


**250-0834**  
Steel Shroud



**250-0124**  
Steel Button




**250-0094**  
Steel/Urethane Button




**1/2-20 UNF**


**250-0405**  
Locknut




**250-0407**  
Stop Collar




**250-0308**  
Mounting Block

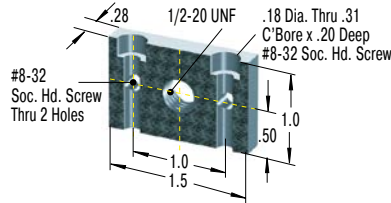


**250-0762**  
Side Load Adaptor

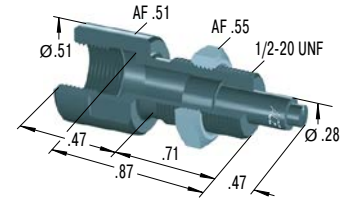

**250-0786**  
Steel Button



**250-0094**  
Steel/Urethane Button




**9/16-18 UNF**


**250-0231**  
Locknut




**250-0271**  
Stop Collar




**250-0318**  
Mounting Block

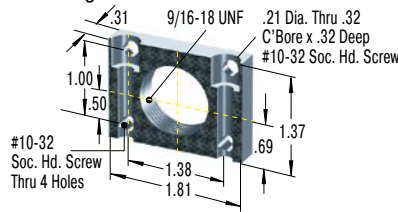


**250-0554**  
Side Load Adaptor

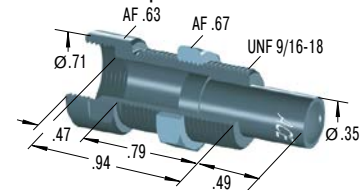


**250-0733**  
Steel Shroud




**250-0785**  
Steel Shroud




**250-0111**  
Steel Button




**250-0095**  
Steel/Urethane Button



**250-0096**  
Steel/Urethane Button




**250-0753**  
Nylon Button




Mounting, installation, ... see pages 50 to 51.

### 3/4-16 UNF


**250-0399**  
Locknut




**250-0403**  
Stop Collar




**250-0401**  
Mounting Block

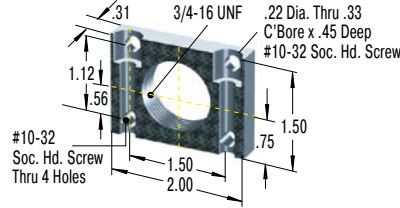


**250-0561**  
Side Load Adaptor

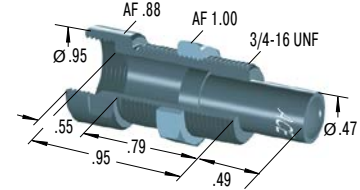


**250-0170**  
Steel Shroud




**250-0734**  
Steel Shroud




**250-0112**  
Steel Button




**250-0097**  
Steel/Urethane Button




**250-0098**  
Steel/Urethane Button



**250-0105**  
Steel/Urethane Button




**250-0754**  
Nylon Button




E<sub>3</sub> max = 292.07 lbs

### 1-12 UNF


**0801-041**  
Locknut




**250-0400**  
Locknut




**250-0275**  
Stop Collar




**250-0774**  
Stop Collar




**250-0402**  
Mounting Block

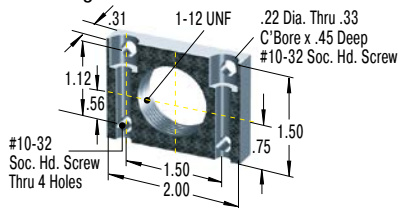


**250-0763**  
Side Load Adaptor




**250-0171**  
Steel Shroud




**250-0765**  
Steel Shroud




**10721-000**  
Steel Button




**250-0099**  
Steel/Urethane Button




**250-0100**  
Steel/Urethane Button



**250-0755**  
Nylon Button




E<sub>3</sub> max = 601.85 lbs

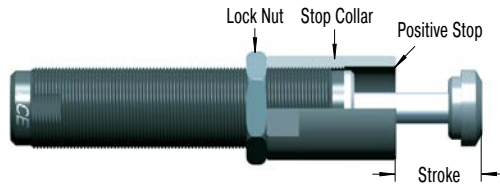

### Stop Collar

All ACE miniature shock absorbers have an integrated positive stop. An optional stop collar can be added if desired to give fine adjustment of final stopping position.

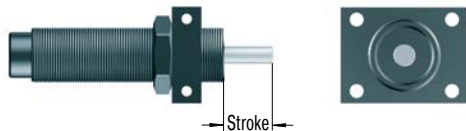

### Mounting Block


This versatile block can be mounted to a horizontal or vertical surface. The shock is screwed into the center threaded hole and secured with a locknut.

#### Mounting information

Mounting block only. Bolts supplied separately.

#### Delivery

One locknut is included with each shock.



### Steel Shroud

Grinding beads, sand, welding splatter, paints, adhesives, etc. can adhere to the piston rod. They then damage the rod seals and the shock absorber quickly fails. In many cases the installation of the optional steel shroud can provide worthwhile protection and increase lifetime.


#### Ordering information

The steel shroud can only be installed onto a shock absorber without rod end button.

For part number MA, MC, SC please order with "-880" suffix. Part numbers MA150, MC150 to MC600 and SC25 to SC190 5-7 are supplied without a button.

#### Safety information

When installing don't forget to allow operating space for the shroud to move as the shock absorber is cycled.

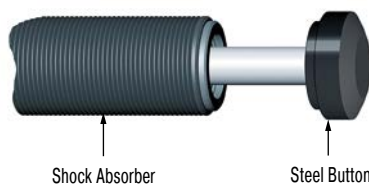

### Steel Button

The buttons are made of an oxidized steel, and offer durability beyond nylon or urethane options. They fit easily onto the piston rod of the corresponding shock absorber. Steel buttons are included on most MA and SC models. Options are available all other models that do not include the standard steel button.

#### Mounting information

Depending on the model, these buttons may be additionally secured with an O-Ring and LOCTITE.




### Steel/Urethane Button

These impact buttons made of urethane offer all advantages of the nylon button in terms of reducing noise and wear. They fit easily onto the piston rod of the corresponding shock absorber. The impact buttons must additionally be secured with LOCTITE.

#### Ordering information

New orders can include this button already installed by adding -BP to the part number.

Please refer to the accessories table on pages 40 to 43 to see which shock absorber types the steel urethane buttons are available for.




### Nylon Button

While the use of industrial shock absorbers provides a considerable reduction in noise levels, adding impact buttons made of glass fiber reinforced nylon reduces noise levels even further. Additionally, use of a nylon button drastically reduces wear to the impact surface. These nylon buttons are available for the MA150 and the MC150 to MC600 shock absorber series.

#### Mounting information

The buttons are fitted by pressing onto the piston rod. We recommend to additionally fix the nylon button with LOCTITE.

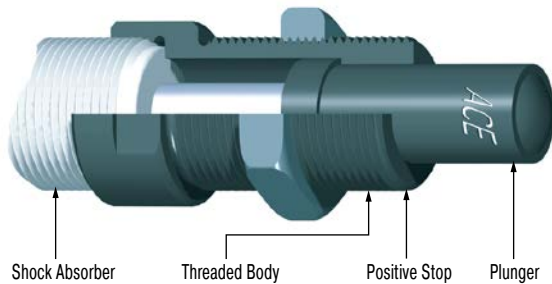

### Side Load Adaptor

Rotating impact motion causes high side load forces on the piston rod. This increases bearing wear and possibly results in rod breakage or bending. With side load impact angles of more than 3° the operation lifetime of the shock absorber reduces rapidly due to increased wear of the rod bearings. The optional side load adaptor provides long lasting solution.

#### Ordering information

The side load adaptor can only be installed onto a shock absorber without rod end button.

#### Material

Threaded body and plunger: Hardened high tensile steel, hardened 610 HV1

#### Mounting information

Secure the side load adaptor with LOCTITE or locknut on the shock absorber. For material combination plunger/impact plate use similar hardness values. We recommend that you install the shock absorber/side load adaptor using the thread on the side load adaptor.


#### Safety information

Maximum angle:

250-0141, 250-0145, 250-0146, 250-0562, 250-0762 = 12.5°

250-0554, 250-0561, 250-0763 = 25°

By repositioning the centre of the stroke of the side load plunger to be at 90 degrees to the piston rod, the side load angle can be halved. The use of an external positive stop due to high forces encountered is required.

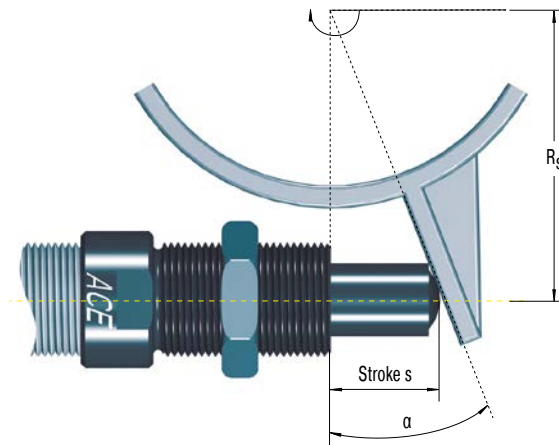

#### Formulae:

$$\alpha = \tan^{-1} \left( \frac{s}{2 \cdot R_s} \right) \quad R_{s \min} = \frac{s}{2 \cdot \tan \alpha \max}$$

#### Example:

$$s = .98 \quad \alpha \max = 25^\circ \text{ (adapter 250-0763)}$$

$$R_s = 3.94$$

$$\alpha = \tan^{-1} \left( \frac{.98}{3.94} \right) \quad R_{s \min} = \frac{.98}{\tan(25^\circ)}$$

$$\alpha = 14^\circ \quad R_{s \min} = 2.1 \text{ in}$$



$\alpha$	= side load angle (°)	$R_s$	= mounting radius (in)
$\alpha \max$	= max. angle of impact (°)	$R_{s \min}$	= min. possible mounting radius (in)
$s$	= absorber stroke (in)		

# Application Examples

## MC25

### Constant deceleration force

ACE miniature shock absorbers are the right alternative. This pneumatic module for high precision, high speed motion intentionally abandoned pneumatic end-of-travel damping. The compact miniature shock absorbers of the type MC25H-NB decelerate the linear motion safer and faster when reaching the end-of-travel position. They accept the moving load gently and decelerate it smoothly throughout the entire stroke length. Additional advantages: simpler construction, smaller pneumatic valves, lower maintenance costs as well as reduced compressed air consumption.

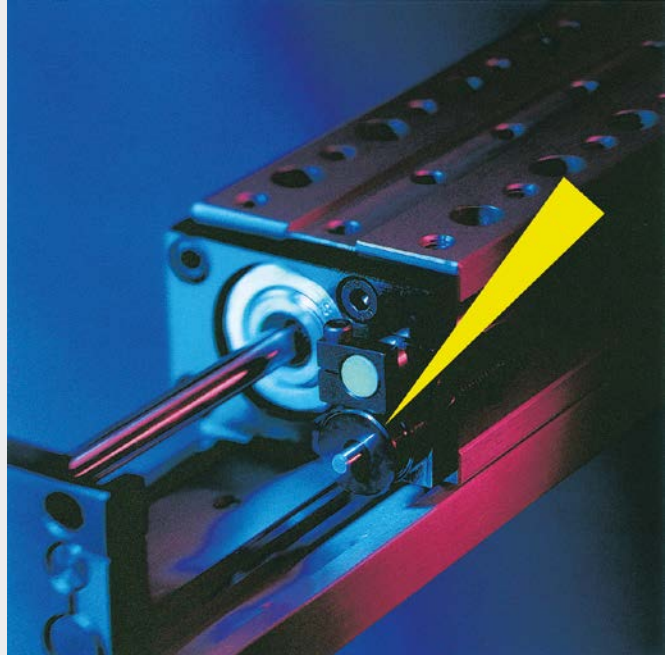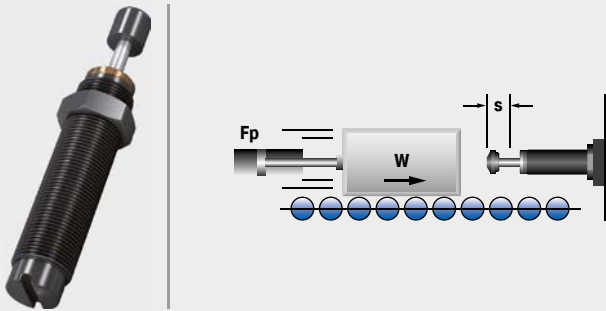


Miniature Shock Absorber in compact pneumatic module

## MC225

### Obstacle end positions secured

In the case of driving safety training, swinging flags are used to simulate the sudden appearance of obstacles. If the driver reacts too slowly, the flags are swung just as quickly away to avoid damage to the vehicle. In order to protect the end positions of this safety system during to and fro motion, ACE miniature shock absorbers of the type MC225H2 are installed. They come with a special side load adapter for use in this situation. Among other things, this improves the ability of the shock absorber to absorb lateral forces during to and fro motion.

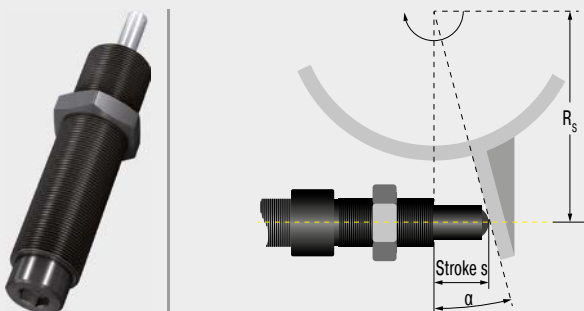


Miniature shock absorbers protect the end positions during driving safety training


Dorninger Hytronics GmbH, 4210 Unterweikersdorf, Austria

**SC190**
**Soft end-of-travel damping on rotary movements**

ACE miniature shock absorbers optimize production with minimum expenditure. The cycle rate for an assembly line producing electronic components was increased to 3,600 units/hr. Miniature shock absorbers type SC190-1 decelerate the rapid transfer movements on the production line and using soft damping methods optimize the pick up and set down of components. This soft deceleration technique has increased production and reduced maintenance on the portal and rotary actuator modules. The optional side load adaptor protects the shock absorber from high side load forces and increases the operating lifetime. Using ACE shock absorbers reduces maintenance costs by 50 % and running costs by 20 %, diminishing energy consumption.

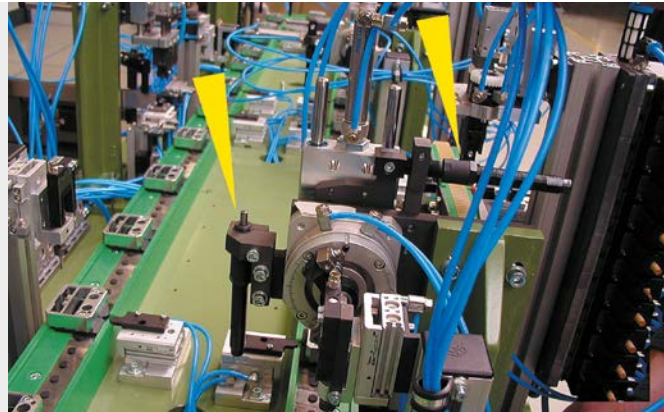

Optimised production in the electronics industry  
Stebie Maschinenbau GmbH, Germany

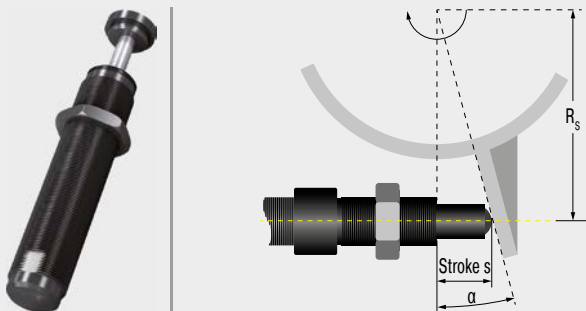

# Industrial Shock Absorbers

## Absorbers suited for all loads

**ACE industrial shock absorbers work hard. Their application means moving loads are evenly decelerated over the full stroke. The result: the lowest braking force and shortest braking time. The MAGNUM series from ACE is viewed as the reference standard for medium-sized damping technology.**

Many innovations such as diaphragm accumulators, long life seals, hardened inner pressure chambers and make a decisive contribution towards extension of the service life. This means that the effective load range can be increased considerably, providing users with more scope with respect to the absorber size and greater utilization of the machine's output. ACE offers a wide range of matching accessories for all absorber series. This eliminates internal production of assembly parts which involves high costs and loss of time.

Innovative damping techniques

Reference class for medium sizes

Less stress on the machine

Increase of production figures

Long machine service lives





## Industrial Shock Absorbers



### MC33 to MC64

Page 56

Self-Compensating

**High energy absorption and robust design**

Linear slides, Swivel units, Turntables, Portal systems



### MC33-V4A to MC64-V4A

Page 60

Self-Compensating, Stainless Steel

**Optimum corrosion protection**

Linear slides, Swivel units, Turntables, Food industry



### MC33-HT to MC64-HT

Page 64

Self-Compensating

**Extreme temperature and high cycle applications**

Linear slides, Swivel units, Turntables, Machines and plants



### MC33-LT to MC64-LT

Page 68

Self-Compensating

**Extreme temperature and high cycle applications**

Linear slides, Swivel units, Turntables, Machines and plants



### SC33 to SC45

Page 72

Self-Compensating, Piston Tube Technology

**Piston tube design for maximum energy absorption**

Turntables, Swivel units, Robot arms, Linear slides



### MA/ML33 to MA/ML64

Page 76

Adjustable

**High energy absorption and progressive adjustment**

Linear slides, Swivel units, Turntables, Portal systems



### SASL1 1/8

Page 80

Adjustable

**Low velocity and high effective weight range**

Linear slides, Pneumatic cylinders, Swivel units, Handling modules



### SALD1/2 to SALD1 1/8

Page 82

Adjustable

**High energy absorption and a wide effective weight range**

Linear slides, Pneumatic cylinders, Swivel units, Handling modules



### SALDN3/4

Page 86

Adjustable

**High energy absorption and a wide effective weight range**

Linear slides, Pneumatic cylinders, Swivel units, Handling modules

## MC33 to MC64

### High energy absorption and robust design

#### Self-Compensating

**Energy capacity 1,505 in-lbs/Cycle to**


**50,000 in-lbs/Cycle**

**Stroke 0.91 in to 5.91 in**

The latest damper technology: The combination of the latest sealing technology, annealed guide bearing and integrated positive stop make these self-compensating shock absorbers from ACE'S MAGNUM range so successful. After all, users benefit from the longer service life of the products, even in the most difficult environments. A continuous outer thread and extensive accessories make their contribution to the success story of the MC33 to MC64.

High energy absorption in a compact design and a wide damping range lead to huge advantages in practice. Alongside generally more compact designs, these small yet very powerful absorbers enable full use of the machine's performance. Self-compensating shock absorbers react to changing energy conditions, without adjustment.

These self-compensating industrial shock absorbers are used in all areas of industrial automation and machine engineering, especially in automation and for gantries.

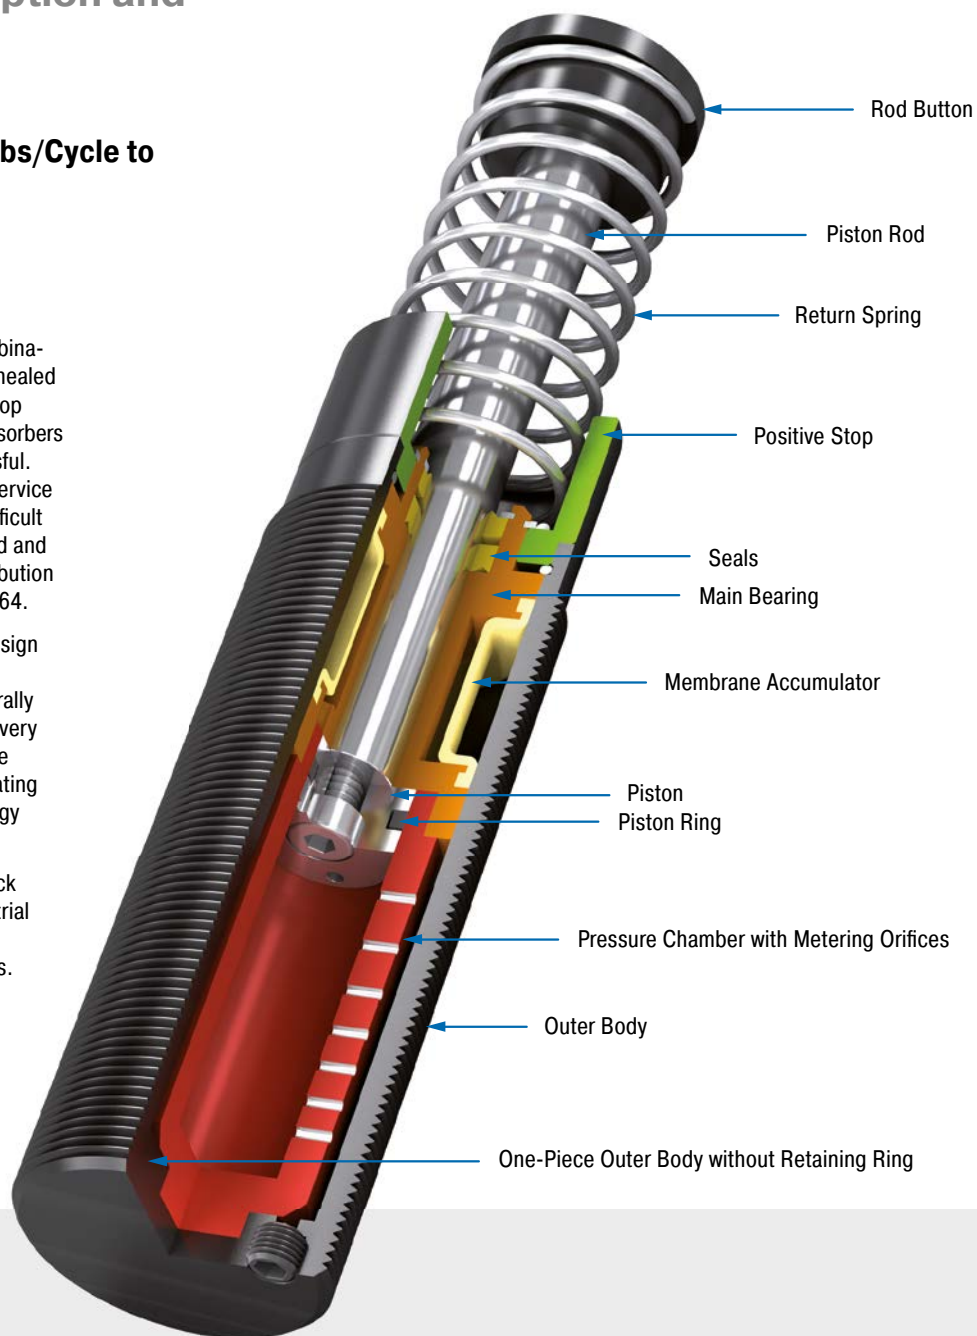

#### Technical Data

**Energy capacity:** 1,505 in-lbs/Cycle to 50,000 in-lbs/Cycle

**Impact velocity range:** 0.5 ft/sec to 16.5 ft/sec. Other speeds on request.

**Operating temperature range:** 10 °F to 150 °F. Other temperatures on request.

**Mounting:** In any position

**Positive stop:** Integrated

**Material:** Outer body: Nitride hardened steel; Piston rod: Hard chrome plated steel; Rod end button: Hardened steel and corrosion-resistant coating; Return spring: Zinc plated or plastic-coated steel; Accessories: Steel with black oxide finish or nitride hardened

**Damping medium:** Automatic Transmission Fluid (ATF)


**Application field:** Linear slides, Swivel units, Turntables, Portal systems, Machines and plants, Tool machines, Machining centers, Z-axes, Impact panels, Handling modules

**Note:** A noise reduction of 3 dB to 7 dB is possible when using the special impact button. For emergency use only applications and for continuous use (with additional cooling) it is sometimes possible to exceed the published max. capacity ratings. In this case, please consult ACE.

**Safety information:** External materials in the surrounding area can attack the seal components and lead to a shorter service life. Please contact ACE for appropriate solution suggestions. Do not paint the shock absorbers due to heat emission.


**On request:** Special oils, nickel-plated, increased corrosion protection, mounting inside air cylinders or other special options are available on request.

### MC33

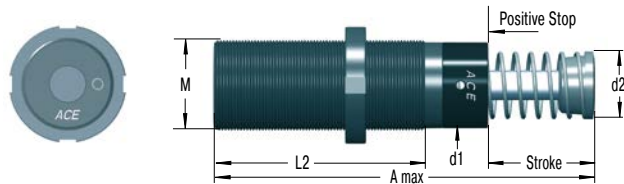


Product available for UNF and metric thread (for metric add suffix -M from part number)  
M33x1.5, M36x1.5 and M42x1.5 also available to order


### 250-0038 Locking Ring




### 250-0016 Rectangular Flange



### 250-0292 Locking Ring



### 250-0293 Rectangular Flange



The calculation and selection of the most suitable damper should be carried out or be approved by ACE.

### Model Type Prefix

#### Standard Models

MC: Self-Contained with return spring, self-compensating

#### Special Models

MCA: Air/Oil return without return spring. Use only with external air/oil tank.

MCS: Air/Oil return with return spring. Use only with external air/oil tank.

MCN: Self-Contained without return spring

### Ordering Example

Self-Compensating \_\_\_\_\_ **MC3325M-1**  
 33 for 1-1/4-12 UNF or M33 threads \_\_\_\_\_  
 Stroke 0.98" (25 mm) \_\_\_\_\_  
 Metric Thread \_\_\_\_\_  
 (omitted when using thread UNF 1 1/4-12)  
 Effective Weight Range Version \_\_\_\_\_

### Dimensions

TYPES	Stroke inch	A max. inch	d1 inch	d2 inch	L2 inch	M
MC3325	0.91	5.44	1.15	1.00	3.25	1-1/4-12 UNF / M33x1.5
MC3350	1.91	7.44	1.15	1.00	4.25	1-1/4-12 UNF / M33x1.5

### Performance

TYPES	Max. Energy Capacity				Effective Weight			Return Force min. lbs	Return Force max. lbs	Return Time s	Side Load Angle max. °	Weight lbs
	<sup>1</sup> E <sub>3</sub> in-lbs/cycle	E <sub>4</sub> in-lbs/h	E <sub>4</sub> with Air/Oil Tank in-lbs/h	E <sub>4</sub> with Oil Recirculation in-lbs/h	<sup>2</sup> We min. lbs	<sup>2</sup> We max. lbs	Hardness					
MC3325-0	1,505	670,000	1,100,000	1,500,000	7	24	-0	10.3	19.8	0.03	4	1.12
MC3325-1	1,505	670,000	1,100,000	1,500,000	20	80	-1	10.3	19.8	0.03	4	1.12
MC3325-2	1,505	670,000	1,100,000	1,500,000	68	272	-2	10.3	19.8	0.03	4	1.12
MC3325-3	1,505	670,000	1,100,000	1,500,000	230	920	-3	10.3	19.8	0.03	4	1.12
MC3325-4	1,505	670,000	1,100,000	1,500,000	780	3,120	-4	10.3	19.8	0.03	4	1.12
MC3350-0	2,920	760,000	1,200,000	1,600,000	11	48	-0	9.9	10.3	0.06	3	1.39
MC3350-1	2,920	760,000	1,200,000	1,600,000	40	160	-1	9.9	10.3	0.06	3	1.39
MC3350-2	2,920	760,000	1,200,000	1,600,000	136	544	-2	9.9	10.3	0.06	3	1.39
MC3350-3	2,920	760,000	1,200,000	1,600,000	460	1,840	-3	9.9	10.3	0.06	3	1.39
MC3350-4	2,920	760,000	1,200,000	1,600,000	1,560	6,240	-4	9.9	10.3	0.06	3	1.39


<sup>1</sup> For emergency use only applications it is sometimes possible to exceed the above ratings. Please consult ACE for further details.

<sup>2</sup> The effective weight range limits can be raised or lowered to special order.

<sup>3</sup> For applications with higher side load angles please contact ACE.


Self-Compensating

MC45

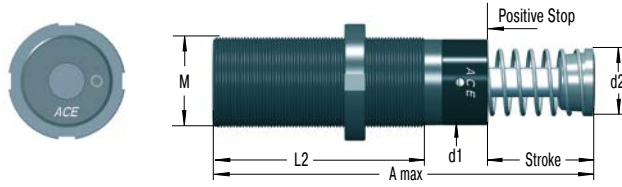


Product available for UNF and metric thread (for metric add suffix -M from part number)


250-0041 Locking Ring




250-0023 Square Flange




250-0024 Rectangular Flange




250-0299 Rectangular Flange



250-0297 Locking Ring



250-0298 Square Flange



The calculation and selection of the most suitable damper should be carried out or be approved by ACE.

Model Type Prefix

Standard Models

MC: Self-Contained with return spring, self-compensating


Special Models

MCA: Air/Oil return without return spring. Use only with external air/oil tank.

MCS: Air/Oil return with return spring. Use only with external air/oil tank.

MCN: Self-Contained without return spring

Ordering Example

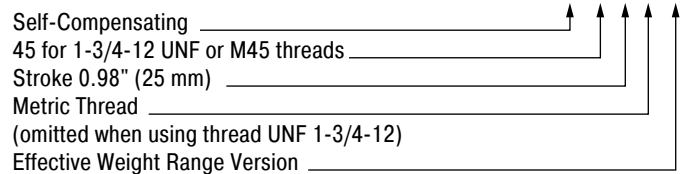

Dimensions

TYPES	Stroke inch	A max. inch	d1 inch	d2 inch	L2 inch	M
MC4525	0.91	5.69	1.65	1.38	3.72	1-3/4-12 UNF / M45x1.5
MC4550	1.91	7.69	1.00	1.15	4.72	1-3/4-12 UNF / M45x1.5
MC4575	2.91	9.69	1.65	1.38	5.72	1-3/4-12 UNF / M45x1.5

Performance


TYPES	Max. Energy Capacity				Effective Weight			Return Force min. lbs	Return Force max. lbs	Return Time s	Side Load Angle max. °	Weight lbs
	<sup>1</sup> E <sub>3</sub> in-lbs/cycle	E <sub>4</sub> in-lbs/h	E <sub>4</sub> with Air/Oil Tank in-lbs/h	E <sub>4</sub> with Oil Recirculation in-lbs/h	We min. lbs	We max. lbs	Hardness					
MC4525-0	3,275	950,000	1,400,000	1,700,000	15	59	-0	15.1	22.8	0.03	4	2.49
MC4525-1	3,275	950,000	1,400,000	1,700,000	50	200	-1	15.1	22.8	0.03	4	2.49
MC4525-2	3,275	950,000	1,400,000	1,700,000	170	680	-2	15.1	22.8	0.03	4	2.49
MC4525-3	3,275	950,000	1,400,000	1,700,000	575	2,300	-3	15.1	22.8	0.03	4	2.49
MC4525-4	3,275	950,000	1,400,000	1,700,000	1,950	7,800	-4	15.1	22.8	0.03	4	2.49
MC4550-0	6,550	1,000,000	1,700,000	2,200,000	28	119	-0	15.1	32.2	0.08	3	3.00
MC4550-1	6,550	1,000,000	1,700,000	2,200,000	100	400	-1	15.1	32.2	0.08	3	3.00
MC4550-2	6,550	1,000,000	1,700,000	2,200,000	340	1,360	-2	15.1	32.2	0.08	3	3.00
MC4550-3	6,550	1,000,000	1,700,000	2,200,000	1,150	4,600	-3	15.1	32.2	0.08	3	3.00
MC4550-4	6,550	1,000,000	1,700,000	2,200,000	3,900	15,600	-4	15.1	32.2	0.08	3	3.00
MC4575-0	10,000	1,300,000	2,000,000	2,500,000	44	176	-0	11.7	40.3	0.11	2	3.51
MC4575-1	10,000	1,300,000	2,000,000	2,500,000	150	600	-1	11.7	40.3	0.11	2	3.51
MC4575-2	10,000	1,300,000	2,000,000	2,500,000	510	2,040	-2	11.7	40.3	0.11	2	3.51
MC4575-3	10,000	1,300,000	2,000,000	2,500,000	1,370	6,920	-3	11.7	40.3	0.11	2	3.51
MC4575-4	10,000	1,300,000	2,000,000	2,500,000	5,850	23,400	-4	11.7	40.3	0.11	2	3.51

<sup>1</sup> For emergency use only applications it is sometimes possible to exceed the above ratings. Please consult ACE for further details.

<sup>2</sup> The effective weight range limits can be raised or lowered to special order.


<sup>3</sup> For applications with higher side load angles please contact ACE.

### MC64

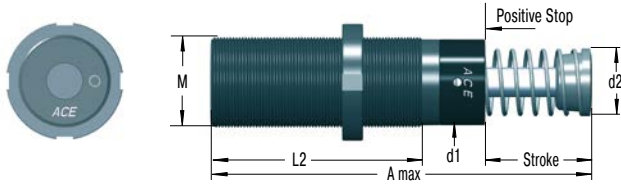


Product available for UNF and metric thread (for metric add suffix -M from part number)  
5.91" stroke model does not include stop collar.  
Positive stop is provided by the rod button (Ø 2.36") and a stop block.


#### 250-0042 Locking Ring




#### 250-0028 Square Flange



#### 250-0301 Locking Ring



#### 250-0302 Square Flange



The calculation and selection of the most suitable damper should be carried out or be approved by ACE.

### Model Type Prefix

#### Standard Models

MC: Self-Contained with return spring, self-compensating

#### Special Models

MCA: Air/Oil return without return spring. Use only with external air/oil tank.

MCS: Air/Oil return with return spring. Use only with external air/oil tank.

MCN: Self-Contained without return spring

#### Ordering Example

Self-Compensating MC6450M-1  
 64 for 2-1/2-12 UNF or M64 threads  
 Stroke 0.97" (50 mm)  
 Metric Thread  
 (omitted when using thread UNF 2-1/2-12)  
 Effective Weight Range Version

### Dimensions

TYPES	Stroke inch	A max. inch	d1 inch	d2 inch	L2 inch	M
MC6450	1.91	8.85	2.37	1.90	5.5	2-1/2-12 UNF / M64x2
MC64100	3.91	12.85	2.37	1.90	7.5	2-1/2-12 UNF / M64x2
MC64150	5.91	17.73	2.37	1.90	9.5	2-1/2-12 UNF / M64x2

### Performance

TYPES	Max. Energy Capacity				Effective Weight			Return Force min. lbs	Return Force max. lbs	Return Time s	Side Load Angle max. °	Weight lbs
	<sup>1</sup> E <sub>3</sub> in-lbs/cycle	E <sub>4</sub> in-lbs/h	E <sub>4</sub> with Air/Oil Tank in-lbs/h	E <sub>4</sub> with Oil Recirculation in-lbs/h	<sup>2</sup> We min. lbs	<sup>2</sup> We max. lbs	Hardness					
MC6450-0	16,550	1,300,000	2,600,000	3,400,000	308	1,190	-0	20.1	34.9	0.12	4	6.39
MC6450-1	16,550	1,300,000	2,600,000	3,400,000	300	1,200	-1	20.1	34.9	0.12	4	6.39
MC6450-2	16,550	1,300,000	2,600,000	3,400,000	1,020	4,080	-2	20.1	34.9	0.12	4	6.39
MC6450-3	16,550	1,300,000	2,600,000	3,400,000	3,460	13,480	-3	20.1	34.9	0.12	4	6.39
MC6450-4	16,550	1,300,000	2,600,000	3,400,000	11,700	46,800	-4	20.1	34.9	0.12	4	6.39
MC64100-0	33,000	1,700,000	3,400,000	4,400,000	154	617	-0	23.5	61.0	0.34	3	8.16
MC64100-1	33,000	1,700,000	3,400,000	4,400,000	600	2,400	-1	23.5	61.0	0.34	3	8.16
MC64100-2	33,000	1,700,000	3,400,000	4,400,000	2,040	8,160	-2	23.5	61.0	0.34	3	8.16
MC64100-3	33,000	1,700,000	3,400,000	4,400,000	6,920	27,680	-3	23.5	61.0	0.34	3	8.16
MC64100-4	33,000	1,700,000	3,400,000	4,400,000	23,400	93,600	-4	23.5	61.0	0.34	3	8.16
MC64150-0	50,000	2,200,000	4,400,000	5,700,000	220	1,014	-0	16.9	82.2	0.48	2	11.25
MC64150-1	50,000	2,200,000	4,400,000	5,700,000	900	3,600	-1	16.9	82.2	0.48	2	11.25
MC64150-2	50,000	2,200,000	4,400,000	5,700,000	3,060	12,240	-2	16.9	82.2	0.48	2	11.25
MC64150-3	50,000	2,200,000	4,400,000	5,700,000	10,380	41,520	-3	16.9	82.2	0.48	2	11.25
MC64150-4	50,000	2,200,000	4,400,000	5,700,000	35,100	140,400	-4	16.9	82.2	0.48	2	11.25

<sup>1</sup> For emergency use only applications it is sometimes possible to exceed the above ratings. Please consult ACE for further details.

<sup>2</sup> The effective weight range limits can be raised or lowered to special order.

<sup>3</sup> For applications with higher side load angles please contact ACE.

## MC33-V4A to MC64-V4A


### Optimum corrosion protection

**Self-Compensating, Stainless Steel**  
**Energy capacity 1,505 in-lbs/Cycle to**  
**33,000 in-lbs/Cycle**  
**Stroke 0.91 in to 3.91 in**

The latest damper technology in stainless steel: The self-compensating industrial shock absorbers MC33 to MC64 from the tried-and-tested and popular MAGNUM range is also available with all outer components made from stainless steel, material AISI 316L (except piston rod). They are filled in the factory with special oil, which meets the permit conditions (NSF-H1) for the food industry.

Just like the standard product family, the MAGNUM stainless steel models are distinguished by their robust, modern sealing technology, high energy absorption in a compact design, integrated positive stop and a wide damping range. Equipped with a PUR head, they are available in thread sizes M33x1.5 to M64x2 with damping strokes up to 3.94 in. Self-compensating shock absorbers react to changing energy conditions, without adjustment.

These self-compensating industrial shock absorbers made of stainless steel from ACE are mainly used in the food, medical, electronics and offshore industries, but also in many other markets.

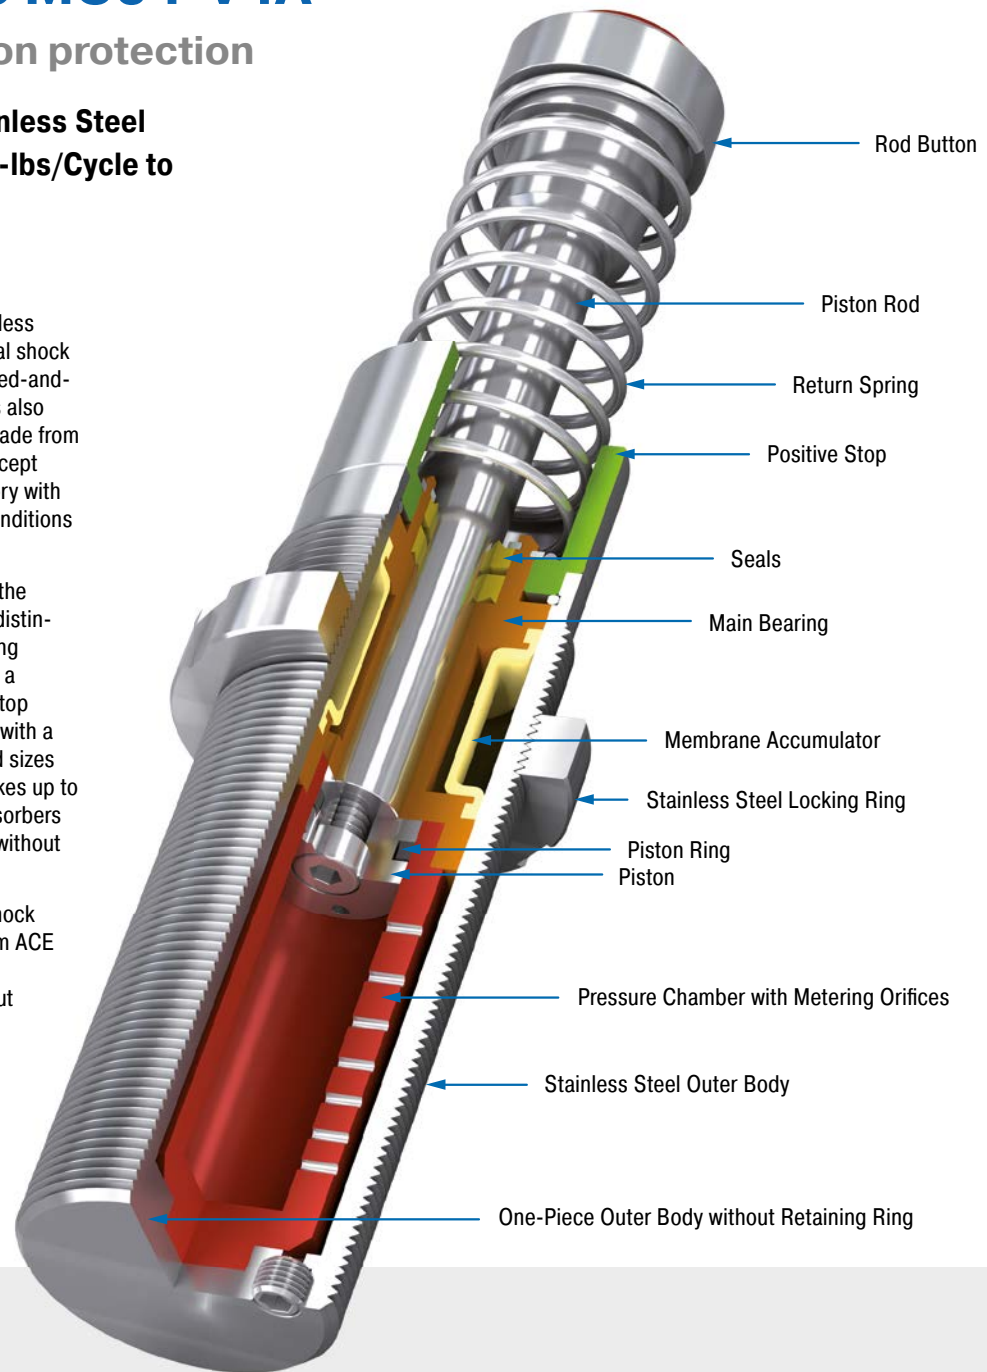

### Technical Data

**Energy capacity:** 1,505 in-lbs/Cycle to 33,000 in-lbs/Cycle

**Impact velocity range:** 0.5 ft/sec to 16.5 ft/sec. Other speeds on request.

**Operating temperature range:** 10 °F to 150 °F. Other temperatures on request.

**Mounting:** In any position

**Positive stop:** Integrated

**Material:** Outer body, Main bearing, Accessories, Locking ring: Stainless steel (1.4404, AISI 316L); Piston rod: Hard chrome plated steel; Rod end button: Stainless steel (1.4404, AISI 316L) with elastomer insert; Return spring: Stainless steel

**Damping medium:** Special oil NSF-H1 approved


**Application field:** Linear slides, Swivel units, Turntables, Food industry, Medical technology, Portal systems, Machines and plants, Tool machines, Machining centers, Z-axes

**Note:** Impact button for noise reduction included. For emergency use only applications and for continuous use (with additional cooling) it is sometimes possible to exceed the published max. capacity ratings. In this case, please consult ACE.


**Safety information:** External materials in the surrounding area can attack the seal components and lead to a shorter service life. Please

contact ACE for appropriate solution suggestions. Do not paint the shock absorbers due to heat emission.

**On request:** Special oils, other special options and special accessories are available on request.

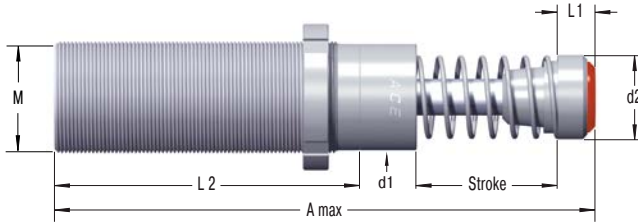**MC33M-V4A**

**250-0048**

Locking Ring



The calculation and selection of the most suitable damper should be carried out or be approved by ACE.

**Model Type Prefix**
**Standard Models**

MC: Self-Contained with return spring, self-compensating

**Special Models**

MCA: Air/Oil return without return spring. Use only with external air/oil tank.

MCS: Air/Oil return with return spring. Use only with external air/oil tank.

MCN: Self-Contained without return spring

**Ordering Example**
**MC3325M-2-V4A**

Self-Compensating \_\_\_\_\_  
 Thread Size M33 \_\_\_\_\_  
 Stroke 0.98" (25 mm) \_\_\_\_\_  
 Effective Weight Range Version \_\_\_\_\_  
 Stainless Steel 1.4404/AISI 316L \_\_\_\_\_

**Dimensions**

TYPES	Stroke mm	A max. mm	d1 mm	d2 mm	L1 mm	L2 mm	M
MC3325M-V4A	0.91	5.95	1.18	1.15	0.52	3.25	M33x1.5
MC3350M-V4A	1.91	7.96	1.18	1.15	0.52	4.25	M33x1.5

**Performance**


TYPES	Max. Energy Capacity		Effective Weight			Return Force min. lbs	Return Force max. lbs	Return Time s	Side Load Angle max. °	Weight lbs
	E <sub>3</sub> in-lbs/cycle	E <sub>4</sub> in-lbs/h	<sup>1</sup> We min. lbs	<sup>1</sup> We max. lbs	Hardness					
MC3325M-0-V4A	1,505	670,000	7	24	-0	10.12	20.23	0.03	4	1.12
MC3325M-1-V4A	1,505	670,000	20	80	-1	10.12	20.23	0.03	4	1.12
MC3325M-2-V4A	1,505	670,000	68	272	-2	10.12	20.23	0.03	4	1.12
MC3325M-3-V4A	1,505	670,000	230	920	-3	10.12	20.23	0.03	4	1.12
MC3325M-4-V4A	1,505	670,000	780	3,120	-4	10.12	20.23	0.03	4	1.12
MC3350M-0-V4A	2,920	760,000	11	48	-0	10.12	30.35	0.06	3	1.39
MC3350M-1-V4A	2,920	760,000	40	160	-1	10.12	30.35	0.06	3	1.39
MC3350M-2-V4A	2,920	760,000	136	544	-2	10.12	30.35	0.06	3	1.39
MC3350M-3-V4A	2,920	760,000	460	1,840	-3	10.12	30.35	0.06	3	1.39
MC3350M-4-V4A	2,920	760,000	1,560	6,240	-4	10.12	30.35	0.06	3	1.39

<sup>1</sup> For emergency use only applications it is sometimes possible to exceed the above ratings. Please consult ACE for further details.

<sup>2</sup> For applications with higher side load angles please contact ACE.


Self-Compensating, Stainless Steel

## MC45M-V4A

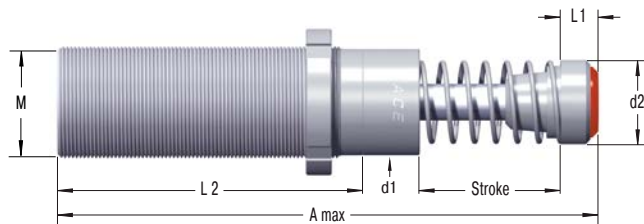

## 250-0049

Locking Ring



The calculation and selection of the most suitable damper should be carried out or be approved by ACE.

## Model Type Prefix

## Standard Models

MC: Self-Contained with return spring, self-compensating

## Special Models

MCA: Air/Oil return without return spring. Use only with external air/oil tank.

MCS: Air/Oil return with return spring. Use only with external air/oil tank.

MCN: Self-Contained without return spring

## Ordering Example

MC4525M-2-V4A

Self-Compensating \_\_\_\_\_  
 Thread Size M45 \_\_\_\_\_  
 Stroke 0.98" (25 mm) \_\_\_\_\_  
 Effective Weight Range Version \_\_\_\_\_  
 Stainless Steel 1.4404/AISI 316L \_\_\_\_\_

## Dimensions

TYPES	Stroke inch	A max. inch	d1 inch	d2 inch	L1 inch	L2 inch	M
MC4525M-V4A	0.91	6.48	1.65	1.65	0.76	3.72	M45x1.5
MC4550M-V4A	1.91	8.44	1.65	1.65	0.76	4.72	M45x1.5
MC4575M-V4A	2.91	10.45	1.65	1.65	0.76	5.72	M45x1.5


## Performance

TYPES	Max. Energy Capacity		Effective Weight			Return Force min. lbs	Return Force max. lbs	Return Time s	<sup>2</sup> Side Load Angle max. °	Weight lbs
	E <sub>3</sub> in-lbs/cycle	E <sub>4</sub> in-lbs/h	<sup>1</sup> We min. lbs	<sup>1</sup> We max. lbs	Hardness					
MC4525M-0-V4A	3,275	950,000	15	59	-0	15.1	22.8	0.03	4	2.51
MC4525M-1-V4A	3,275	950,000	50	200	-1	15.1	22.8	0.03	4	2.51
MC4525M-2-V4A	3,275	950,000	170	680	-2	15.1	22.8	0.03	4	2.51
MC4525M-3-V4A	3,275	950,000	575	2,315	-3	15.1	22.8	0.03	4	2.51
MC4525M-4-V4A	3,275	950,000	1,950	7,804	-4	15.1	22.8	0.03	4	2.51
MC4550M-0-V4A	6,550	1,000,000	28	119	-0	15.1	32.2	0.08	3	3.00
MC4550M-1-V4A	6,550	1,000,000	100	400	-1	15.1	32.2	0.08	3	3.00
MC4550M-2-V4A	6,550	1,000,000	340	1,360	-2	15.1	32.2	0.08	3	3.00
MC4550M-3-V4A	6,550	1,000,000	1,150	4,600	-3	15.1	32.2	0.08	3	3.00
MC4550M-4-V4A	6,550	1,000,000	3,900	15,600	-4	11.7	40.3	0.08	3	3.00
MC4575M-0-V4A	10,000	1,300,000	44	176	-0	11.7	40.3	0.11	2	3.51
MC4575M-1-V4A	10,000	1,300,000	150	600	-1	11.7	40.3	0.11	2	3.51
MC4575M-2-V4A	10,000	1,300,000	510	2,040	-2	11.7	40.3	0.11	2	3.51
MC4575M-3-V4A	10,000	1,300,000	1,370	6,920	-3	11.7	40.3	0.11	2	3.51
MC4575M-4-V4A	10,000	1,300,000	5,850	23,400	-4	11.7	40.3	0.11	2	3.51


<sup>1</sup> For emergency use only applications it is sometimes possible to exceed the above ratings. Please consult ACE for further details.

<sup>2</sup> For applications with higher side load angles please contact ACE.

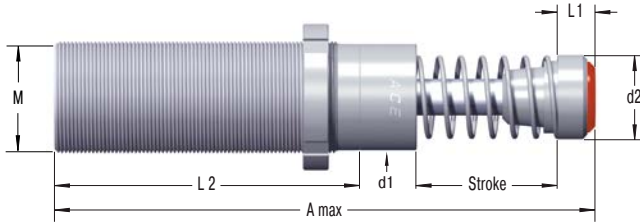

**MC64M-V4A**

**250-0179**

Locking Ring



The calculation and selection of the most suitable damper should be carried out or be approved by ACE.

**Model Type Prefix**
**Standard Models**

MC: Self-Contained with return spring, self-compensating

**Special Models**

MCA: Air/Oil return without return spring. Use only with external air/oil tank.

MCS: Air/Oil return with return spring. Use only with external air/oil tank.

MCN: Self-Contained without return spring

**Ordering Example**
**MC6450M-2-V4A**

Self-Compensating \_\_\_\_\_  
 Thread Size M64 \_\_\_\_\_  
 Stroke 0.97" (50 mm) \_\_\_\_\_  
 Effective Weight Range Version \_\_\_\_\_  
 Stainless Steel 1.4404/AISI 316L \_\_\_\_\_

**Dimensions**

TYPES	Stroke inch	A max. inch	d1 inch	d2 inch	L1 inch	L2 inch	M
MC6450M-0-V4A	1.91	9.61	2.36	2.36	0.75	5.5	M64x2
MC64100M-0-V4A	3.91	13.59	2.36	2.36	0.75	7.5	M64x2

**Performance**

TYPES	Max. Energy Capacity		Effective Weight			Return Force min. lbs	Return Force max. lbs	Return Time s	<sup>2</sup> Side Load Angle		Weight lbs
	E <sub>3</sub> in-lbs/cycle	E <sub>4</sub> in-lbs/h	<sup>1</sup> We min. lbs	<sup>1</sup> We max. lbs	Hardness				max. °		
MC6450M-0-V4A	16,550	1,300,000	308	1,190	-0	20.1	34.9	0.12	4		6.39
MC6450M-1-V4A	16,550	1,300,000	300	1,200	-1	20.1	34.9	0.12	4		6.39
MC6450M-2-V4A	16,550	1,300,000	1,020	4,080	-2	20.1	34.9	0.12	4		6.39
MC6450M-3-V4A	16,550	1,300,000	3,460	13,480	-3	20.1	34.9	0.12	4		6.39
MC6450M-4-V4A	16,550	1,300,000	11,700	46,800	-4	20.1	34.9	0.12	4		6.39
MC64100M-0-V4A	33,000	1,700,000	154	617	-0	23.5	61.0	0.34	3		8.16
MC64100M-1-V4A	33,000	1,700,000	600	2,400	-1	23.5	61.0	0.34	3		8.16
MC64100M-2-V4A	33,000	1,700,000	2,040	8,160	-2	23.5	61.0	0.34	3		8.16
MC64100M-3-V4A	33,000	1,700,000	6,920	27,680	-3	23.5	61.0	0.34	3		8.16
MC64100M-4-V4A	33,000	1,700,000	23,400	93,600	-4	23.5	61.0	0.34	3		8.16

<sup>1</sup> For emergency use only applications it is sometimes possible to exceed the above ratings. Please consult ACE for further details.

<sup>2</sup> For applications with higher side load angles please contact ACE.

## MC33-HT to MC64-HT

### Extreme temperature and high cycle applications

#### Self-Compensating


**Energy capacity 1,505 in-lbs/Cycle to 33,000 in-lbs/Cycle**

**Stroke 0.91 in to 3.91 in**

Greater application range: just like all MAGNUM types from the product family MC33 to MC64, the HT (high temperature) industrial shock absorbers are also made from one solid piece. They use special seals and fluids. This means that these versions can even be used at extreme temperatures of 32 °F to +302 °F in order to safely and reliably damp masses and absorb 100 % of the kinetic energy.

These ready-to-install machine elements are recommended even under the most unfavorable conditions. Additional benefits are their robust, innovative sealing technology, high energy absorption in a compact design, fixed positive stop and a wide damping range. Self-compensating shock absorbers react to changing energy conditions, without adjustment.

Designed for use in extreme temperature ranges, these self-compensating industrial shock absorbers are suitable almost anywhere in plant, industrial, automation and machine engineering.

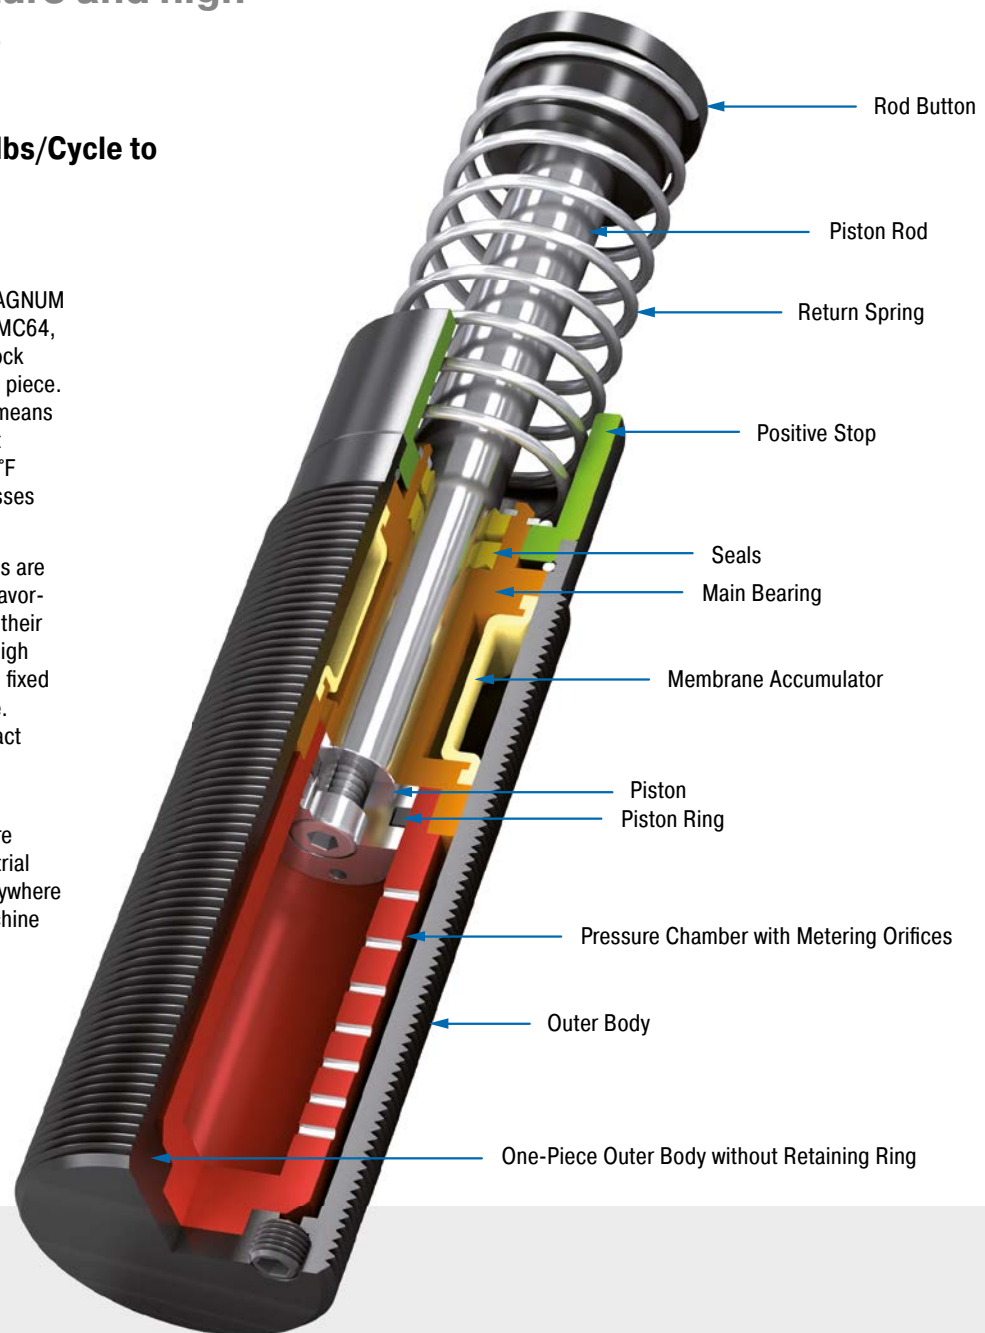

#### Technical Data

**Energy capacity:** 1,505 in-lbs/Cycle to 33,000 in-lbs/Cycle

**Impact velocity range:** 0.5 ft/sec to 16.5 ft/sec. Other speeds on request.

**Operating temperature range:** 32 °F to 302 °F

**Mounting:** In any position

**Positive stop:** Integrated

**Material:** Outer body: Nitride hardened steel; Piston rod: Hard chrome plated steel; Rod end button: Hardened steel and corrosion-resistant coating; Return spring: Zinc plated or plastic-coated steel; Accessories: Steel with black oxide finish or nitride hardened

**Damping medium:** Synthetic high temperature oil


**Application field:** Linear slides, Swivel units, Turntables, Machines and plants, Tool machines, Machining centers, Z-axes

**Note:** A noise reduction of 3 dB to 7 dB is possible when using the special impact button.

**Safety information:** External materials in the surrounding area can attack the seal components and lead to a shorter service life. Please contact ACE for appropriate solution suggestions. Do not paint the shock absorbers due to heat emission.


**On request:** Nickel-plated, increased corrosion protection, mounting inside air cylinders or other special options are available on request. Adjustable HT and LT shock absorbers.

### MC33-HT

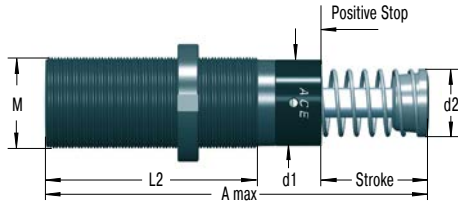


Product available for UNF and metric thread (for metric add suffix -M from part number)  
M33x1.5, M36x1.5 and M42x1.5 also available to order


#### 250-0038 Locking Ring




#### 250-0016 Rectangular Flange



#### 250-0292 Locking Ring



#### 250-0293 Rectangular Flange



The calculation and selection of the most suitable damper should be carried out or be approved by ACE.

### Complete details required when ordering

- Load to be decelerated: W (lbs)
- Impact velocity: v (ft/s)
- Propelling force: F (lbs)
- Operating cycles per hour: c (/hr)
- Number of absorbers in parallel: n
- Ambient temperature: °F

### Ordering Example

Self-Compensating \_\_\_\_\_  
 33 for 1-1/4-12 UNF or M33 threads \_\_\_\_\_  
 Stroke 1.97" (50 mm) \_\_\_\_\_  
 Metric Thread \_\_\_\_\_  
 (omitted when using thread UNF 1-1/4-12)  
 Effective Weight Range Version \_\_\_\_\_  
 HT = Version for High Temperature Use \_\_\_\_\_

**MC3350M-2-HT**

### Dimensions

TYPES	Stroke inch	A max. inch	d1 inch	d2 inch	L2 inch	M
MC3325-HT	0.91	5.44	1.15	1.00	3.25	1-1/4-12 UNF / M33x1.5
MC3350-HT	1.91	7.44	1.15	1.00	4.25	1-1/4-12 UNF / M33x1.5


### Performance

TYPES	Max. Energy Capacity			Effective Weight			Side Load Angle max. °	Weight lbs
	E <sub>3</sub> in-lbs/cycle	E <sub>4</sub> at 68 °F in-lbs/h	E <sub>4</sub> at 212 °F in-lbs/h	<sup>1</sup> We min. lbs	<sup>1</sup> We max. lbs	Hardness		
MC3325-0-HT	1,505	1,902,909	725,760	6	24	-0	4	1.12
MC3325-1-HT	1,505	1,902,909	725,760	20	80	-1	4	1.12
MC3325-2-HT	1,505	1,902,909	725,760	68	272	-2	4	1.12
MC3325-3-HT	1,505	1,902,909	725,760	230	920	-3	4	1.12
MC3325-4-HT	1,505	1,902,909	725,760	780	3,120	-4	4	1.12
MC3350-0-HT	2,920	2,159,580	823,118	11	48	-0	3	1.39
MC3350-1-HT	2,920	2,159,580	823,118	40	160	-1	3	1.39
MC3350-2-HT	2,920	2,159,580	823,118	136	544	-2	3	1.39
MC3350-3-HT	2,920	2,159,580	823,118	460	1,840	-3	3	1.39
MC3350-4-HT	2,920	2,159,580	823,118	1,560	6,240	-4	3	1.39

<sup>1</sup> The effective weight range limits can be raised or lowered to special order.  
<sup>2</sup> For applications with higher side load angles please contact ACE.


Self-Compensating

MC45-HT

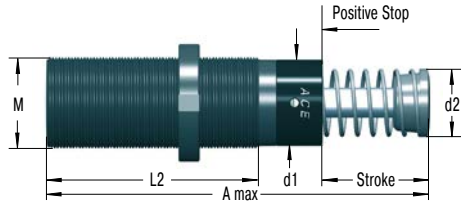


Product available for UNF and metric thread (for metric add suffix -M from part number)


250-0041 Locking Ring




250-0023 Square Flange




250-0024 Rectangular Flange




250-0299 Rectangular Flange



250-0297 Locking Ring



250-0298 Square Flange




The calculation and selection of the most suitable damper should be carried out or be approved by ACE.

Complete details required when ordering

- Load to be decelerated: W (lbs)
- Impact velocity: v (ft/s)
- Propelling force: F (lbs)
- Operating cycles per hour: c (/hr)
- Number of absorbers in parallel: n
- Ambient temperature: °F

Ordering Example

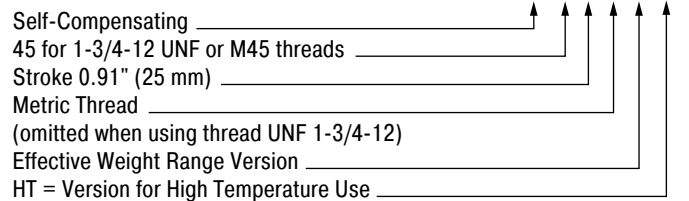

Dimensions


TYPES	Stroke inch	A max. inch	d1 inch	d2 inch	L2 inch	M
MC4525-HT	0.91	5.69	1.65	1.38	3.72	1-3/4-12 UNF / M45x1.5
MC4550-HT	1.91	7.69	1.65	1.38	4.72	1-3/4-12 UNF / M45x1.5

Performance

TYPES	Max. Energy Capacity			Effective Weight			Side Load Angle max. °	Weight lbs
	E <sub>3</sub> in-lbs/cycle	E <sub>4</sub> at 68 °F in-lbs/h	E <sub>4</sub> at 212 °F in-lbs/h	<sup>1</sup> We min. lbs	<sup>1</sup> We max. lbs	Hardness		
MC4525-0-HT	3,275	2,717,177	1,035,536	15	59	-0	4	2.49
MC4525-1-HT	3,275	2,717,177	1,035,536	50	200	-1	4	2.49
MC4525-2-HT	3,275	2,717,177	1,035,536	170	680	-2	4	2.49
MC4525-3-HT	3,275	2,717,177	1,035,536	575	2,300	-3	4	2.49
MC4525-4-HT	3,275	2,717,177	1,035,536	1,950	7,800	-4	4	2.49
MC4550-0-HT	6,550	2,841,087	1,079,790	28	119	-0	3	3.00
MC4550-1-HT	6,550	2,841,087	1,079,790	100	400	-1	3	3.00
MC4550-2-HT	6,550	2,841,087	1,079,790	340	1,360	-2	3	3.00
MC4550-3-HT	6,550	2,841,087	1,079,790	1,150	4,600	-3	3	3.00
MC4550-4-HT	6,550	2,841,087	1,079,790	3,900	15,600	-4	3	3.00


<sup>1</sup> The effective weight range limits can be raised or lowered to special order.  
<sup>2</sup> For applications with higher side load angles please contact ACE.

### MC64-HT

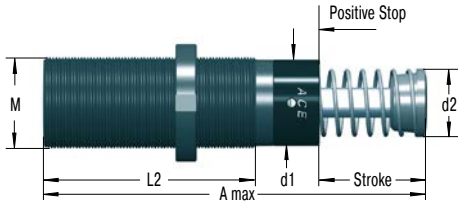


Product available for UNF and metric thread (for metric add suffix -M from part number)


#### 250-0042 Locking Ring




#### 250-0028 Square Flange



#### 250-0301 Locking Ring



#### 250-0302 Square Flange



The calculation and selection of the most suitable damper should be carried out or be approved by ACE.

### Complete details required when ordering

- Load to be decelerated: W (lbs)
- Impact velocity: v (ft/s)
- Propelling force: F (lbs)
- Operating cycles per hour: c (/hr)
- Number of absorbers in parallel: n
- Ambient temperature: °F

### Ordering Example

Self-Compensating **MC6450M-2-HT**  
 64 for 2-1/2-12 UNF or M64 threads  
 Stroke 1.91" (50 mm)  
 Metric Thread  
 (omitted when using thread UNF 2-1/2-12)  
 Effective Weight Range Version  
 HT = Version for High Temperature Use

### Dimensions

TYPES	Stroke inch	A max. inch	d1 inch	d2 inch	L2 inch	M
MC6450-HT	1.91	8.85	2.37	1.90	5.5	2-1/2-12 UNF / M64x2
MC64100-HT	3.91	12.85	2.37	1.90	7.5	2-1/2-12 UNF / M64x2

### Performance

TYPES	Max. Energy Capacity			Effective Weight			Side Load Angle max. °	Weight lbs
	E <sub>3</sub> in-lbs/cycle	E <sub>4</sub> at 68 °F in-lbs/h	E <sub>4</sub> at 212 °F in-lbs/h	<sup>1</sup> We min. lbs	<sup>1</sup> We max. lbs	Hardness		
MC6450-0-HT	16,550	3,708,460	1,407,267	308	1,190	-0	4	6.39
MC6450-1-HT	16,550	3,708,460	1,407,267	300	1,200	-1	4	6.39
MC6450-2-HT	16,550	3,708,460	1,407,267	1,020	4,080	-2	4	6.39
MC6450-3-HT	16,550	3,708,460	1,407,267	3,460	13,480	-3	4	6.39
MC6450-4-HT	16,550	3,708,460	1,407,267	11,700	46,800	-4	4	6.39
MC64100-0-HT	33,000	4,867,907	1,770,148	154	617	-0	3	8.16
MC64100-1-HT	33,000	4,867,907	1,770,148	600	2,400	-1	3	8.16
MC64100-2-HT	33,000	4,867,907	1,770,148	2,040	8,160	-2	3	8.16
MC64100-3-HT	33,000	4,867,907	1,770,148	6,920	27,680	-3	3	8.16
MC64100-4-HT	33,000	4,867,907	1,770,148	23,400	93,600	-4	3	8.16

<sup>1</sup> The effective weight range limits can be raised or lowered to special order.  
<sup>2</sup> For applications with higher side load angles please contact ACE.

## MC33-LT to MC64-LT

### Extreme temperature and high cycle applications

#### Self-Compensating


**Energy capacity 1,505 in-lbs/Cycle to 50,000 in-lbs/Cycle**

**Stroke 0.91 in to 5.91 in**

Greater application range: just like all MAGNUM types from the product family MC33 to MC64, the LT (low temperature) industrial shock absorbers are also made from one solid piece. They use special seals and fluids. This means that these versions can even be used at extreme temperatures of -58 °F to +151 °F in order to safely and reliably damp masses and absorb 100 % of the kinetic energy.

These ready-to-install machine elements are recommended even under the most unfavorable conditions. Additional benefits are their robust, innovative sealing technology, high energy absorption in a compact design, fixed positive stop and a wide damping range. Self-compensating shock absorbers react to changing energy conditions, without adjustment.

Designed for use in extreme temperature ranges, these self-compensating industrial shock absorbers are suitable almost anywhere in plant, industrial, automation and machine engineering.

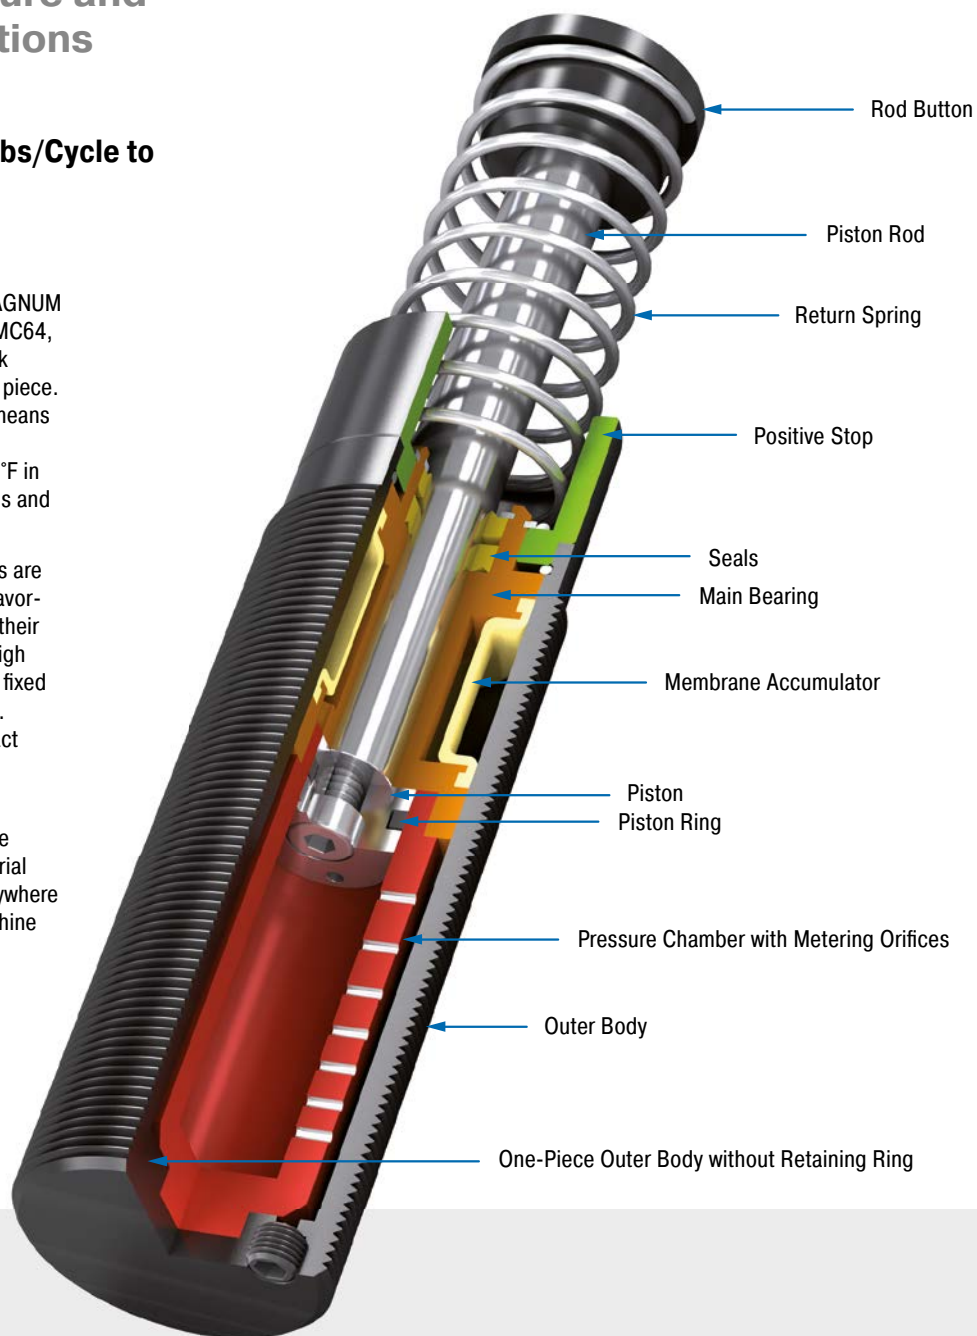

#### Technical Data

**Energy capacity:** 1,505 in-lbs/Cycle to 50,000 in-lbs/Cycle

**Impact velocity range:** 0.5 ft/sec to 16.5 ft/sec. Other speeds on request.

**Operating temperature range:** -58 °F to 150 °F

**Mounting:** In any position

**Positive stop:** Integrated

**Material:** Outer body: Nitride hardened steel; Piston rod: Hard chrome plated steel; Rod end button: Hardened steel and corrosion-resistant coating; Return spring: Zinc plated or plastic-coated steel; Accessories: Steel with black oxide finish or nitride hardened

**Damping medium:** Low temperature hydraulic oil


**Application field:** Linear slides, Swivel units, Turntables, Machines and plants, Tool machines, Machining centers, Z-axes

**Note:** A noise reduction of 3 dB to 7 dB is possible when using the special impact button.

**Safety information:** External materials in the surrounding area can attack the seal components and lead to a shorter service life. Please contact ACE for appropriate solution suggestions. Do not paint the shock absorbers due to heat emission.


**On request:** Nickel-plated, increased corrosion protection, mounting inside air cylinders or other special options are available on request. Adjustable HT and LT shock absorbers.

### MC33-LT

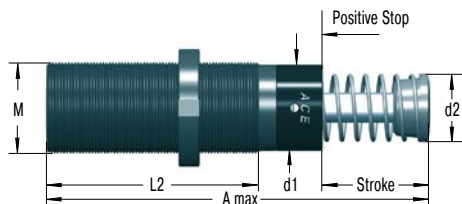


Product available for UNF and metric thread (for metric add suffix -M from part number)  
M33x1.5, M36x1.5 and M42x1.5 also available to order


#### 250-0038 Locking Ring




#### 250-0016 Rectangular Flange



#### 250-0292 Locking Ring



#### 250-0293 Rectangular Flange



The calculation and selection of the most suitable damper should be carried out or be approved by ACE.

### Complete details required when ordering

- Load to be decelerated: W (lbs)
- Impact velocity: v (ft/s)
- Propelling force: F (lbs)
- Operating cycles per hour: c (/hr)
- Number of absorbers in parallel: n
- Ambient temperature: °F

### Ordering Example

Self-Compensating \_\_\_\_\_ **MC3325M-3-LT**  
 33 for 1-1/4-12 UNF or M33 threads \_\_\_\_\_  
 Stroke 0.91" (25 mm) \_\_\_\_\_  
 Metric Thread \_\_\_\_\_  
 (omitted when using thread UNF 1-1/4-12)  
 Effective Weight Range Version \_\_\_\_\_  
 LT = Version for High Temperature Use \_\_\_\_\_

### Dimensions

TYPES	Stroke inch	A max. inch	d1 inch	d2 inch	L2 inch	M
MC3325-LT	0.91	5.44	1.15	1.00	3.25	1-1/4-12 UNF / M33x1.5
MC3350-LT	1.91	7.44	1.15	1.00	4.25	1-1/4-12 UNF / M33x1.5

### Performance

TYPES	Max. Energy Capacity		Effective Weight			Return Time s	Side Load Angle max. °	Weight lbs
	E <sub>3</sub> in-lbs/cycle	E <sub>4</sub> in-lbs/h	<sup>1</sup> We min. lbs	<sup>1</sup> We max. lbs	Hardness			
MC3325-0-LT	1,505	670,000	6	24	-0	0.08	4	1.12
MC3325-1-LT	1,505	670,000	20	80	-1	0.08	4	1.12
MC3325-2-LT	1,505	670,000	68	272	-2	0.08	4	1.12
MC3325-3-LT	1,505	670,000	230	920	-3	0.08	4	1.12
MC3325-4-LT	1,505	670,000	780	3,120	-4	0.08	4	1.12
MC3350-0-LT	2,920	760,000	11	48	-0	0.16	3	1.39
MC3350-1-LT	2,920	760,000	40	160	-1	0.16	3	1.39
MC3350-2-LT	2,920	760,000	136	544	-2	0.16	3	1.39
MC3350-3-LT	2,920	760,000	460	1,840	-3	0.16	3	1.39
MC3350-4-LT	2,920	760,000	1,560	6,240	-4	0.16	3	1.39

<sup>1</sup> The effective weight range limits can be raised or lowered to special order.

<sup>2</sup> at -58 °F


<sup>3</sup> For applications with higher side load angles please contact ACE.

Products for UNF and metric thread available




Self-Compensating

MC45-LT

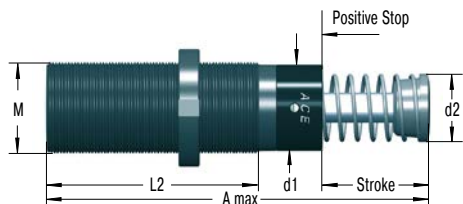


Product available for UNF and metric thread (for metric add suffix -M from part number)


250-0041 Locking Ring




250-0023 Square Flange




250-0024 Rectangular Flange




250-0299 Rectangular Flange



250-0297 Locking Ring



250-0298 Square Flange



The calculation and selection of the most suitable damper should be carried out or be approved by ACE.

Complete details required when ordering

- Load to be decelerated: W (lbs)
- Impact velocity: v (ft/s)
- Propelling force: F (lbs)
- Operating cycles per hour: c ( /hr)
- Number of absorbers in parallel: n
- Ambient temperature: °F

Ordering Example

Self-Compensating **MC4525M-3-LT**  
 45 for 1-3/4-12 UNF or M45 threads  
 Stroke 0.91" (25 mm)  
 Metric Thread  
 (omitted when using thread UNF 1-3/4-12)  
 Effective Weight Range Version  
 LT = Version for High Temperature Use

Dimensions

TYPES	Stroke inch	A max. inch	d1 inch	d2 inch	L2 inch	M
MC4525-LT	0.91	5.69	1.65	1.38	3.72	1-3/4-12 UNF / M45x1.5
MC4550-LT	1.91	7.69	1.65	1.38	4.72	1-3/4-12 UNF / M45x1.5
MC4575-LT	2.91	9.69	1.65	1.38	5.72	1-3/4-12 UNF / M45x1.5

Performance


TYPES	Max. Energy Capacity		Effective Weight		Hardness	Return Time s	Side Load Angle max. °	Weight lbs
	E <sub>3</sub> in-lbs/cycle	E <sub>4</sub> in-lbs/h	We min. lbs	We max. lbs				
MC4525-0-LT	3,275	950,000	15	59	-0	0.08	4	2.49
MC4525-1-LT	3,275	950,000	50	200	-1	0.08	4	2.49
MC4525-2-LT	3,275	950,000	170	680	-2	0.08	4	2.49
MC4525-3-LT	3,275	950,000	575	2,300	-3	0.08	4	2.49
MC4525-4-LT	3,275	950,000	1,950	7,800	-4	0.08	4	2.49
MC4550-0-LT	6,550	1,000,000	28	119	-0	0.16	3	3.00
MC4550-1-LT	6,550	1,000,000	100	400	-1	0.16	3	3.00
MC4550-2-LT	6,550	1,000,000	340	1,360	-2	0.16	3	3.00
MC4550-3-LT	6,550	1,000,000	1,150	4,600	-3	0.16	3	3.00
MC4550-4-LT	6,550	1,000,000	3,900	15,600	-4	0.16	3	3.00
MC4575-0-LT	10,000	1,300,000	44	176	-0	0.24	2	3.51
MC4575-1-LT	10,000	1,300,000	150	600	-1	0.24	2	3.51
MC4575-2-LT	10,000	1,300,000	510	2,040	-2	0.24	2	3.51
MC4575-3-LT	10,000	1,300,000	1,370	6,920	-3	0.24	2	3.51
MC4575-4-LT	10,000	1,300,000	5,850	23,400	-4	0.24	2	3.51

<sup>1</sup> The effective weight range limits can be raised or lowered to special order.  
<sup>2</sup> at -58 °F  
<sup>3</sup> For applications with higher side load angles please contact ACE.

Issue 04.2018 – Specifications subject to change




### MC64-LT

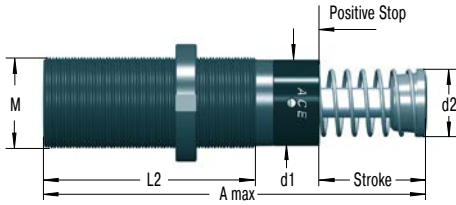


Product available for UNF and metric thread (for metric add suffix -M from part number)  
 5.91" stroke model does not include stop collar.  
 Positive stop is provided by the rod button (Ø 2.36") and a stop block.


#### 250-0042 Locking Ring




#### 250-0028 Square Flange



#### 250-0301 Locking Ring



#### 250-0302 Square Flange



The calculation and selection of the most suitable damper should be carried out or be approved by ACE.

### Complete details required when ordering

- Load to be decelerated: W (lbs)
- Impact velocity: v (ft/s)
- Propelling force: F (lbs)
- Operating cycles per hour: c (/hr)
- Number of absorbers in parallel: n
- Ambient temperature: °F

### Ordering Example

Self-Compensating \_\_\_\_\_ **MC6450M-3-LT**  
 64 for 2-1/2-12 UNF or M64 threads \_\_\_\_\_  
 Stroke 1.91" (50 mm) \_\_\_\_\_  
 Metric Thread \_\_\_\_\_  
 (omitted when using thread UNF 2-1/2-12)  
 Effective Weight Range Version \_\_\_\_\_  
 LT = Version for High Temperature Use \_\_\_\_\_

### Dimensions

TYPES	Stroke inch	A max. inch	d1 inch	d2 inch	L2 inch	M
MC6450-LT	1.91	8.85	2.37	1.90	5.5	2-1/2-12 UNF / M64x2
MC64100-LT	3.91	12.85	2.37	1.90	7.5	2-1/2-12 UNF / M64x2
MC64150-LT	5.91	17.73	2.37	1.90	9.5	2-1/2-12 UNF / M64x2

### Performance

TYPES	Max. Energy Capacity		Effective Weight		Hardness	Return Time s	Side Load Angle max. °	Weight lbs
	E <sub>3</sub> in-lbs/cycle	E <sub>4</sub> in-lbs/h	<sup>1</sup> We min. lbs	<sup>1</sup> We max. lbs				
MC6450-0-LT	16,551	1,300,000	308	1,190	-0	0.24	4	6.39
MC6450-1-LT	16,551	1,300,000	300	1,200	-1	0.24	4	6.39
MC6450-2-LT	16,551	1,300,000	1,020	4,080	-2	0.24	4	6.39
MC6450-3-LT	16,551	1,300,000	3,460	13,480	-3	0.24	4	6.39
MC6450-4-LT	16,551	1,300,000	11,700	46,800	-4	0.24	4	6.39
MC64100-0-LT	33,013	1,700,000	154	617	-0	0.68	3	8.16
MC64100-1-LT	33,013	1,700,000	600	2,400	-1	0.60	3	8.16
MC64100-2-LT	33,013	1,700,000	2,040	8,160	-2	0.68	3	8.16
MC64100-3-LT	33,013	1,700,000	6,920	27,680	-3	0.68	3	8.16
MC64100-4-LT	33,013	1,700,000	23,400	93,600	-4	0.68	3	8.16
MC64150-0-LT	50,007	2,200,000	220	1,014	-0	0.96	2	11.25
MC64150-1-LT	50,007	2,200,000	900	3,600	-1	0.96	2	11.25
MC64150-2-LT	50,007	2,200,000	3,060	12,240	-2	0.96	2	11.25
MC64150-3-LT	50,007	2,200,000	10,380	41,520	-3	0.96	2	11.25
MC64150-4-LT	50,007	2,200,000	35,100	140,400	-4	0.96	2	11.25

<sup>1</sup> The effective weight range limits can be raised or lowered to special order.

<sup>2</sup> at -58 °F

<sup>3</sup> For applications with higher side load angles please contact ACE.

## SC33 to SC45

### Piston tube design for maximum energy absorption

#### Self-Compensating, Piston Tube Technology

Energy capacity 1,372 In-lbs/Cycle to


6,019 in-lbs/Cycle

Stroke 0.91 in to 1.91 in

True performers: The SC33 to SC45 absorber models are strong and durable by combining the proven sealing technology from the MAGNUM range including membrane accumulator with the well-known piston tube technology from the SC<sup>2</sup> family. We increase the oil volume to ensure the maximum effective weights. Short stroke lengths of .98" to 1.96" deliver shorter braking times in combination with high energy absorption.

These dampers safely and reliably decelerate rotary movements without unwanted recoil effects. Installation close to the pivot point is possible. ACE's generation of piston tube manage low impact speeds with ease. Self-compensating shock absorbers react to changing energy conditions, without adjustment.

These self-compensating industrial shock absorbers can be relied on in industrial, automation and machine engineering. They are used in pivot units, rotary tables, robot arms or integrated wherever deceleration is needed.

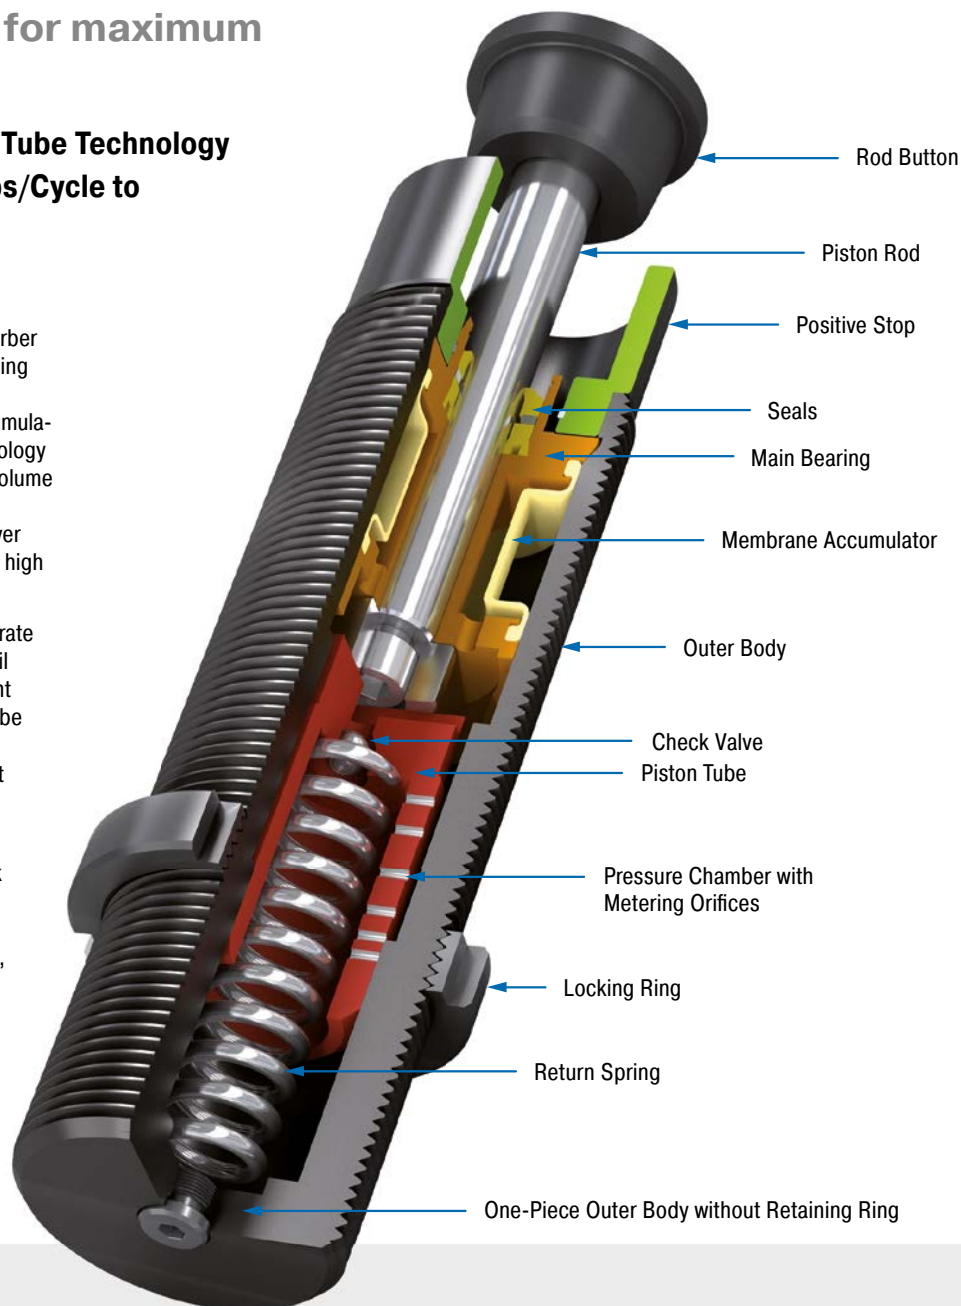

#### Technical Data

**Energy capacity:** 1,372 In-lbs/Cycle to 6,019 in-lbs/Cycle

**Impact velocity range:** 0.66 ft/sec to 1.51 ft/sec. Other speeds on request.

**Operating temperature range:** 10 °F to 150 °F. Other temperatures on request.

**Mounting:** In any position

**Positive stop:** Integrated

**Material:** Outer body: Nitride hardened steel; Piston rod: Hard chrome plated steel; Rod end button: Hardened steel and corrosion-resistant coating; Accessories: Steel with black oxide finish or nitride hardened

**Damping medium:** Low temperature hydraulic oil


**Application field:** Turntables, Swivel units, Robot arms, Linear slides, Pneumatic cylinders, Handling modules, Machines and plants, Finishing and processing centers

**Note:** A noise reduction of 3 dB to 7 dB is possible when using the special impact button.

**Safety information:** External materials in the surrounding area can attack the seal components and lead to a shorter service life. Please contact ACE for appropriate solution suggestions. Do not paint the shock absorbers due to heat emission.


**On request:** Special oils, mounting inside air cylinders or other special options are available on request.

**SC33**

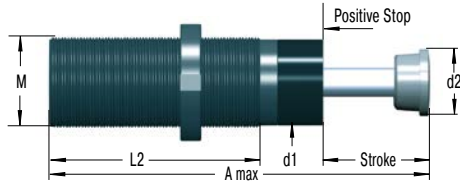


Product available for UNF and metric thread (for metric add suffix -M from part number)


**250-0038**  
Locking Ring




**250-0016**  
Rectangular Flange



**250-0292**  
Locking Ring




**250-0293**  
Rectangular Flange



The calculation and selection of the most suitable damper should be carried out or be approved by ACE.

**Ordering Example**

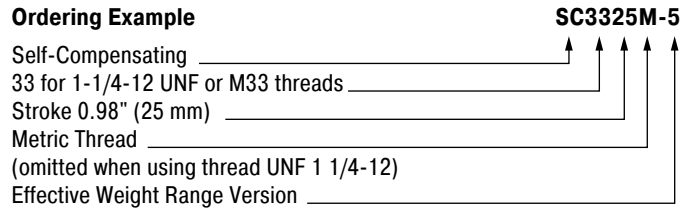

**Dimensions**

TYPES	Stroke inch	A max. inch	d1 inch	d2 inch	L2 inch	M
SC3325	0.91	7.01	1.18	1.00	4.80	1-1/4-12 UNF / M33x1.5
SC3350	1.91	10.00	1.18	1.00	6.81	1-1/4-12 UNF / M33x1.5


**Performance**

TYPES	Max. Energy Capacity		Effective Weight			Return Force			Return Time		Side Load Angle		Weight lbs
	E <sub>3</sub> in-lbs/cycle	E <sub>4</sub> in-lbs/h	<sup>1</sup> We min. lbs	<sup>1</sup> We max. lbs	Hardness	min. lbs	max. lbs	Return Time s	max. °				
SC3325-5	1,372	663,806	2,998	5,999	-5	9.89	20.01	0.75	4	1.50			
SC3325-6	1,372	663,806	5,512	12,000	-6	9.89	20.01	0.75	4	1.50			
SC3325-7	1,372	663,806	10,999	19,698	-7	9.89	20.01	0.75	4	1.50			
SC3325-8	1,372	663,806	18,999	29,998	-8	9.89	20.01	0.75	4	1.50			
SC3350-5	2,744	752,313	5,999	11,001	-5	11.47	28.10	0.90	3	2.03			
SC3350-6	2,744	752,313	10,000	22,002	-6	11.47	28.10	0.90	3	2.03			

<sup>1</sup> The effective weight range limits can be raised or lowered to special order.  
<sup>2</sup> For applications with higher side load angles please contact ACE.


Self-Compensating, Piston Tube Technology

SC45

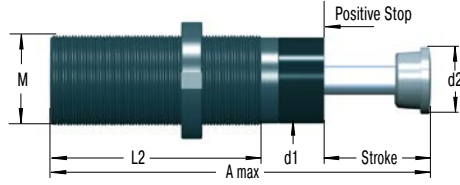


Product available for UNF and metric thread (for metric add suffix -M from part number)


250-0041 Locking Ring




250-0024 Rectangular Flange




250-0023 Square Flange




250-0297 Locking Ring



250-0299 Rectangular Flange




250-0298 Square Flange



The calculation and selection of the most suitable damper should be carried out or be approved by ACE.

Ordering Example

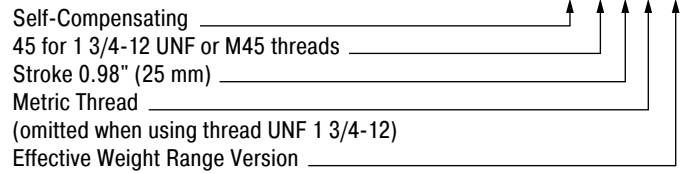

Dimensions

TYPES	Stroke inch	A max. inch	d1 inch	d2 inch	L2 inch	M
SC4525	0.91	7.44	1.65	1.38	5.47	1-3/4-12 UNF / M45x1.5
SC4550	1.91	10.43	1.65	1.38	7.48	1-3/4-12 UNF / M45x1.5

Performance

TYPES	Max. Energy Capacity		Effective Weight			Return Force min. lbs	Return Force max. lbs	Return Time s	Side Load Angle max. °	Weight lbs
	E <sub>3</sub> in-lbs/cycle	E <sub>4</sub> in-lbs/h	<sup>1</sup> We min. lbs	<sup>1</sup> We max. lbs	Hardness					
SC4525-5	3,009	947,029	7,496	14,991	-5	15.06	23.38	0.8	4	3.15
SC4525-6	3,009	947,029	13,999	29,983	-6	15.06	23.38	0.8	4	3.15
SC4525-7	3,009	947,029	27,999	49,999	-7	15.06	23.38	0.8	4	3.15
SC4525-8	3,009	947,029	44,998	85,980	-8	15.06	23.38	0.8	4	3.15
SC4550-5	6,019	991,283	14,991	26,998	-5	10.57	54.40	1.0	3	4.19
SC4550-6	6,019	991,283	25,992	59,498	-6	10.57	54.40	1.0	3	4.19
SC4550-7	6,019	991,283	56,998	97,499	-7	10.57	54.40	1.0	3	4.19

<sup>1</sup> The effective weight range limits can be raised or lowered to special order.


<sup>2</sup> For applications with higher side load angles please contact ACE.



# Locate and Eliminate Disturbing Vibration

## Vibration isolation

- Free App for iPhone
- Precise 3-axis measurement system
- Simple, understandable menu
- Immediate product recommendations

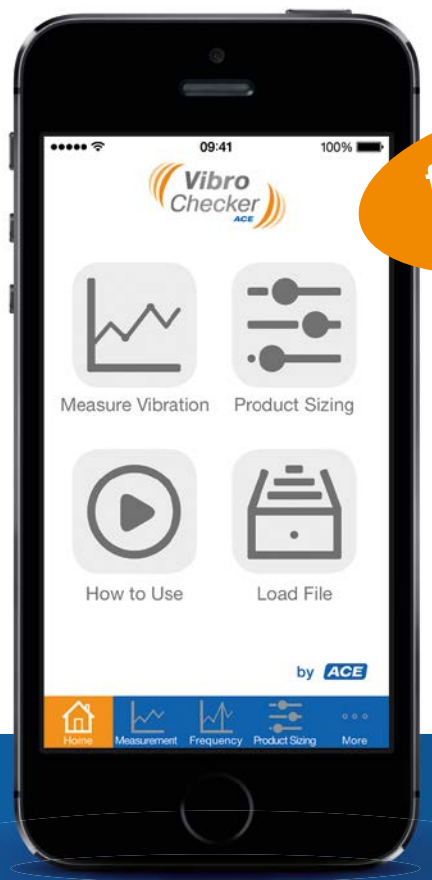

free in the  
App Store

Start now.  
**Free App!**



[www.vibrochecker.com](http://www.vibrochecker.com)

## MA/ML33 to MA/ML64

### High energy absorption and progressive adjustment

#### Adjustable


**Energy capacity 1,505 in-lbs/Cycle to 60,008 in-lbs/Cycle**

**Stroke 0.91 in to 5.91 in**

Adjustable and unique: These industrial shock absorbers from ACE, which can be precisely adjusted both at the front and rear, also contribute towards the success of the MAGNUM range. Equipped with excellent sealing technology, an annealed guide bearing and integrated positive stop, they are robust and durable.

These dampers absorb 50 % more energy than their predecessors but are built even more compactly. The larger range of effective loads also opens up options in design and assembly. This makes the ML range especially suitable for effective weights of 661 lbs. to 1,102,311 lbs. (300 kg to 500,000 kg). These shocks are the best option wherever application data changes and flexibility is required.

These adjustable industrial shock absorbers are used in all areas of industrial, automation and machine engineering, for gantries and integrated in linear carriers or pivoting units.

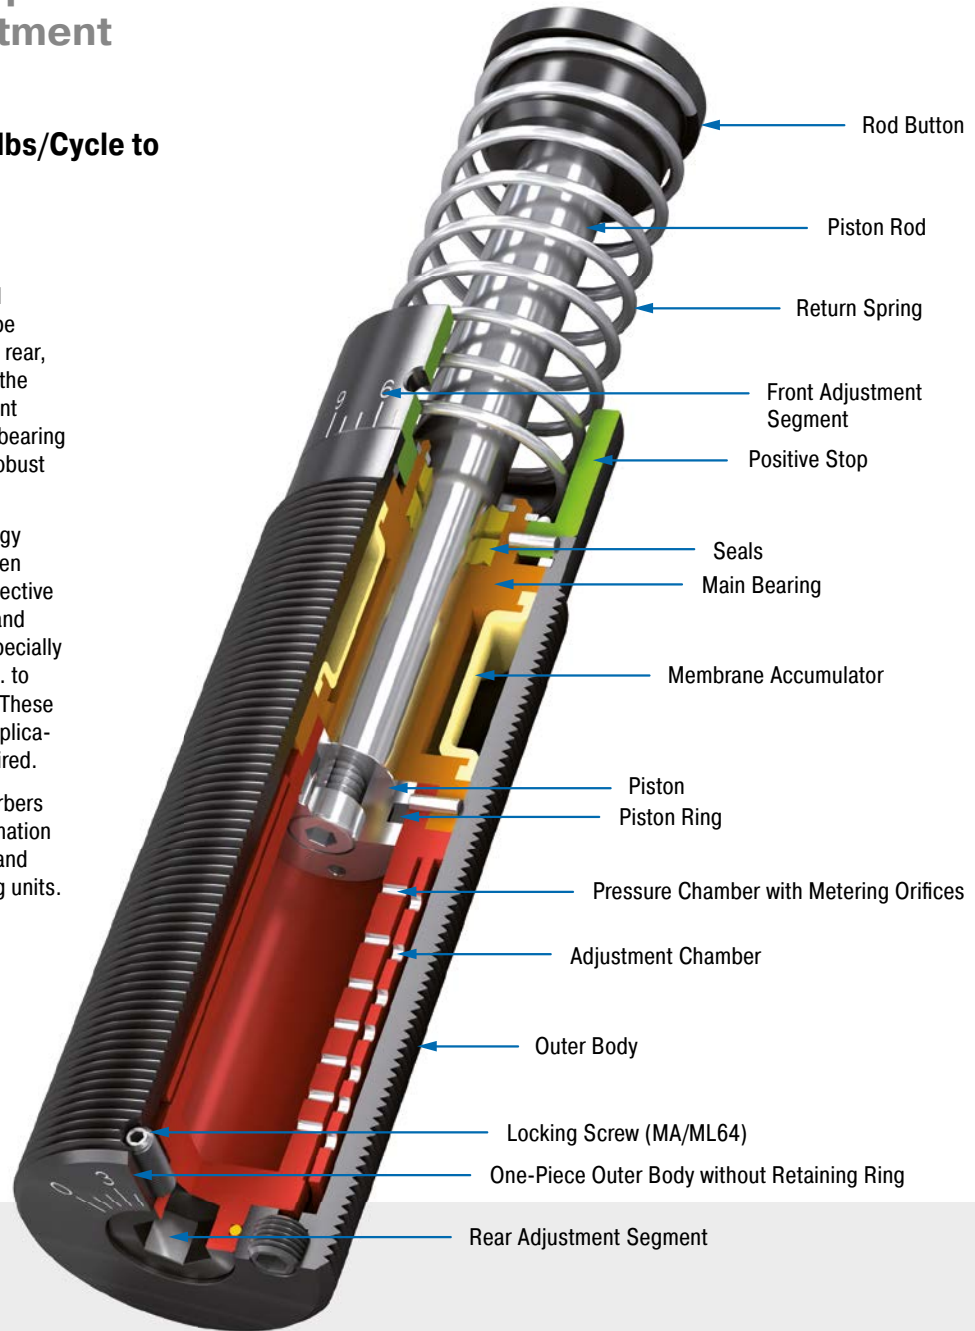

#### Technical Data

**Energy capacity:** 1,505 in-lbs/Cycle to 60,008 in-lbs/Cycle

**Impact velocity range:** MA: 0.5 ft/sec to 16.5 ft/sec. ML: 0.06 ft/sec to 1.5 ft/sec. Other speeds on request.

**Operating temperature range:** 10 °F to 150 °F. Other temperatures on request.

**Mounting:** In any position

**Positive stop:** Integrated

**Adjustment:** Hard impact at the start of stroke, adjust the ring towards 9 or PLUS. Hard impact at the end of stroke, adjust the ring towards 0 or MINUS.

**Material:** Outer body: Nitride hardened steel; Piston rod: Hard chrome plated steel; Rod end button: Hardened steel and corrosion-resistant coating; Return spring: Zinc plated or plastic-coated steel; Accessories: Steel with black oxide finish or nitride hardened

**Damping medium:** Automatic Transmission Fluid (ATF)

**Application field:** Linear slides, Swivel units, Turntables, Portal systems, Machines and plants, Tool machines, Machining centers, Z-axes, Impact panels, Handling modules

**Note:** A noise reduction of 3 dB to 7 dB is possible when using the special impact button. For emergency use only applications and for

continuous use (with additional cooling) it is sometimes possible to exceed the published max. capacity ratings. In this case, please consult ACE.


**Safety information:** External materials in the surrounding area can attack the seal components and lead to a shorter service life. Please contact ACE for appropriate solution suggestions. Do not paint the shock absorbers due to heat emission.

**On request:** Special oils, nickel-plated, increased corrosion protection, mounting inside air cylinders or other special options are available on request.

### MA/ML33




Adjuster

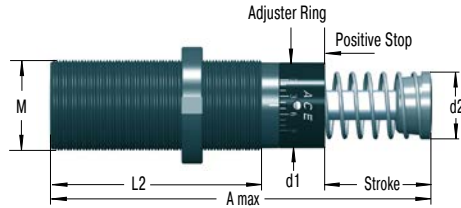


Product available for UNF and metric thread (for metric add suffix -M from part number)


#### 250-0038 Locking Ring




#### 250-0016 Rectangular Flange

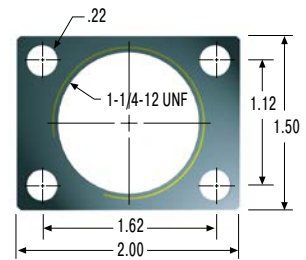

#### 250-0292 Locking Ring



#### 250-0293 Rectangular Flange



The calculation and selection of the most suitable damper should be carried out or be approved by ACE.

### Model Type Prefix

#### Standard Models

- MA: Self-Contained with return spring, adjustable
- ML: Self-Contained with return spring, adjustable, for lower impact velocity

#### Special Models

- MAA, MLA: Air/Oil return without return spring. Use only with external air/oil tank.
- MAS, MLS: Air/Oil Return with return spring. Use only with external air/oil tank.
- MAN, MLN: Self-Contained without return spring

### Ordering Example

Adjustable \_\_\_\_\_ MA/ML3325M  
 33 for 1-1/4-12 UNF or M33 threads \_\_\_\_\_  
 Stroke 0.98" (25 mm) \_\_\_\_\_  
 Metric Thread \_\_\_\_\_  
 (omitted when using thread UNF 1 1/4-12)

### Dimensions

TYPES	Stroke inch	A max. inch	d1 inch	d2 inch	L2 inch	M
MA3325	0.91	5.44	1.15	1.00	3.25	1-1/4-12 UNF / M33x1.5
ML3325	0.91	5.44	1.15	1.00	3.25	1-1/4-12 UNF / M33x1.5
MA3350	1.91	7.44	1.15	1.00	4.25	1-1/4-12 UNF / M33x1.5
ML3350	1.91	7.44	1.15	1.00	4.25	1-1/4-12 UNF / M33x1.5

### Performance

TYPES	Max. Energy Capacity				Effective Weight		Return Force min. lbs	Return Force max. lbs	Return Time s	Side Load Angle max. °	Weight lbs
	<sup>1</sup> E <sub>3</sub> in-lbs/cycle	E <sub>4</sub> in-lbs/h	E <sub>4</sub> with Air/Oil Tank in-lbs/h	E <sub>4</sub> with Oil Recirculation in-lbs/h	<sup>2</sup> We min. lbs	<sup>2</sup> We max. lbs					
MA3325	1,900	670,000	1,100,000	1,500,000	20	3,800	10.3	19.8	0.03	4	0.99
ML3325	1,900	670,000	1,100,000	1,500,000	661	110,231	10.3	19.8	0.03	4	0.99
MA3350	3,800	760,000	1,200,000	1,600,000	28	5,400	9.9	30.3	0.06	3	1.19
ML3350	3,800	760,000	1,200,000	1,600,000	1,102	176,370	9.9	30.3	0.06	3	1.19

<sup>1</sup> For emergency use only applications it is sometimes possible to exceed the above ratings. Please consult ACE for further details.

<sup>2</sup> The effective weight range limits can be raised or lowered to special order.


<sup>3</sup> For applications with higher side load angles please contact ACE.

Adjustable

MA/ML45




Adjuster

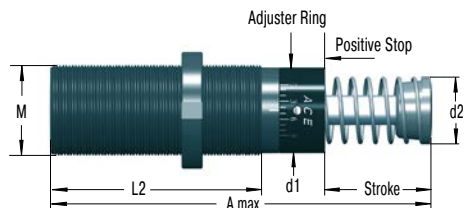


Product available for UNF and metric thread (for metric add suffix -M from part number)


250-0041 Locking Ring




250-0023 Square Flange




250-0024 Rectangular Flange




250-0299 Rectangular Flange



250-0297 Locking Ring



250-0298 Square Flange



The calculation and selection of the most suitable damper should be carried out or be approved by ACE.

Model Type Prefix

Standard Models

MA: Self-Contained with return spring, adjustable  
ML: Self-Contained with return spring, adjustable, for lower impact velocity

Special Models

MAA, MLA: Air/Oil return without return spring. Use only with external air/oil tank.  
MAS, MLS: Air/Oil Return with return spring. Use only with external air/oil tank.  
MAN, MLN: Self-Contained without return spring

Ordering Example

Adjustable \_\_\_\_\_ MA/ML4525M  
45 for 1-3/4-12 UNF or M45 threads \_\_\_\_\_  
Stroke 0.98" (25 mm) \_\_\_\_\_  
Metric Thread \_\_\_\_\_  
(omitted when using thread UNF 1-3/4-12)

Dimensions

TYPES	Stroke inch	A max. inch	d1 inch	d2 inch	L2 inch	M
MA4525	0.91	5.69	1.65	1.38	3.72	1-3/4-12 UNF / M45x1.5
ML4525	0.91	5.69	1.65	1.38	3.72	1-3/4-12 UNF / M45x1.5
MA4550	1.91	7.69	1.65	1.38	4.72	1-3/4-12 UNF / M45x1.5
ML4550	1.91	7.69	1.65	1.38	4.72	1-3/4-12 UNF / M45x1.5
MA4575	2.91	9.69	1.65	1.38	5.72	1-3/4-12 UNF / M45x1.5


Performance

TYPES	Max. Energy Capacity				Effective Weight		Return Force			Return Time		Side Load	
	<sup>1</sup> E <sub>3</sub> in-lbs/cycle	E <sub>4</sub> in-lbs/h	E <sub>4</sub> with Air/Oil Tank in-lbs/h	E <sub>4</sub> with Oil Recirculation in-lbs/h	<sup>2</sup> We min. lbs	<sup>2</sup> We max. lbs	min. lbs	max. lbs	Return Time s	<sup>3</sup> Side Load Angle max. °	Weight lbs		
MA4525	3,762	950,000	1,400,000	1,700,000	95	22,000	15.1	22.8	0.03	4	2.49		
ML4525	3,762	950,000	1,400,000	1,700,000	6,614	242,508	15.1	32.2	0.03	4	2.49		
MA4550	7,523	1,000,000	1,700,000	2,200,000	150	32,000	15.1	32.2	0.08	3	3.00		
ML4550	7,523	1,000,000	1,700,000	2,200,000	11,023	396,832	15.1	32.2	0.08	3	3.00		
MA4575	11,506	1,300,000	2,000,000	2,500,000	155	33,000	11.7	40.3	0.11	2	3.51		

<sup>1</sup> For emergency use only applications it is sometimes possible to exceed the above ratings. Please consult ACE for further details.  
<sup>2</sup> The effective weight range limits can be raised or lowered to special order.  
<sup>3</sup> For applications with higher side load angles please contact ACE.




### MA/ML64

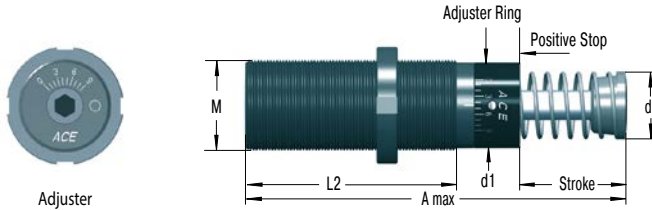


Adjuster

Product available for UNF and metric thread (for metric add suffix -M from part number)  
5.91" stroke model does not include stop collar.  
Positive stop is provided by the rod button (Ø 2.36") and a stop block.


### 250-0042 Locking Ring




### 250-0028 Square Flange



### 250-0301 Locking Ring



### 250-0302 Square Flange



The calculation and selection of the most suitable damper should be carried out or be approved by ACE.

### Model Type Prefix

#### Standard Models

MA: Self-Contained with return spring, adjustable  
ML: Self-Contained with return spring, adjustable, for lower impact velocity

#### Special Models

MAA, MLA: Air/Oil return without return spring. Use only with external air/oil tank.  
MAS, MLS: Air/Oil Return with return spring. Use only with external air/oil tank.  
MAN, MLN: Self-Contained without return spring

### Ordering Example

Adjustable \_\_\_\_\_ MA/ML6450M  
64 for 2-1/2-12 UNF or M64 threads \_\_\_\_\_  
Stroke 1.97" (50 mm) \_\_\_\_\_  
Metric Thread \_\_\_\_\_  
(omitted when using thread UNF 2-1/2-12)

### Dimensions

TYPES	Stroke inch	A max. inch	d1 inch	d2 inch	L2 inch	M
ML6425	0.91	6.85	2.37	1.90	4.5	2-1/2-12 UNF / M64x2
MA6450	1.91	8.85	2.37	1.90	5.5	2-1/2-12 UNF / M64x2
ML6450	1.91	8.85	2.37	1.90	5.5	2-1/2-12 UNF / M64x2
MA64100	3.91	12.85	2.37	1.90	7.5	2-1/2-12 UNF / M64x2
MA64150	5.91	17.73	2.37	1.90	9.5	2-1/2-12 UNF / M64x2

### Performance

TYPES	Max. Energy Capacity				Effective Weight		Return Force			Return Time		Side Load	
	<sup>1</sup> E <sub>3</sub> in-lbs/cycle	E <sub>4</sub> in-lbs/h	E <sub>4</sub> with Air/Oil Tank in-lbs/h	E <sub>4</sub> with Oil Recirculation in-lbs/h	<sup>2</sup> We min. lbs	<sup>2</sup> We max. lbs	min. lbs	max. lbs	Return Time s	<sup>3</sup> Side Load Angle max. °	Weight lbs		
ML6425	10,046	1,100,000	2,200,000	2,900,000	15,432	661,386	26.7	34.9	0.06	5	5.51		
MA6450	20,135	1,300,000	2,600,000	3,400,000	480	110,000	20.1	34.9	0.12	4	6.39		
ML6450	20,135	1,300,000	2,600,000	3,400,000	24,250	1,102,310	20.1	34.9	0.12	4	6.39		
MA64100	40,005	1,700,000	3,400,000	4,400,000	600	115,000	23.5	61.0	0.34	3	8.16		
MA64150	60,008	2,200,000	4,400,000	5,700,000	730	175,000	16.9	82.0	0.48	2	11.25		

<sup>1</sup> For emergency use only applications it is sometimes possible to exceed the above ratings. Please consult ACE for further details.

<sup>2</sup> The effective weight range limits can be raised or lowered to special order.

<sup>3</sup> For applications with higher side load angles please contact ACE.

## SASL1 1/8

Low velocity and high effective weight range

### Adjustable


**Energy capacity 8,000 in-lbs/Cycle to 16,000 in-lbs/Cycle**

**Stroke 1 in to 2 in**

Designed for low velocity, high propelling force applications, SASL shock absorbers are a fixed flange product with a built-in square mount.

SASL industrial shock absorbers can be adjusted and precisely adapted to your requirements; they feature an integrated positive stop and are designed to handle effective weights from 16,000 to 48,000 in-lbs. per cycle.

These adjustable shock absorbers are ideal for all areas of industrial automation and machine engineering applications. They are used in linear slides, tool machines, swivel units or wherever deceleration is needed.

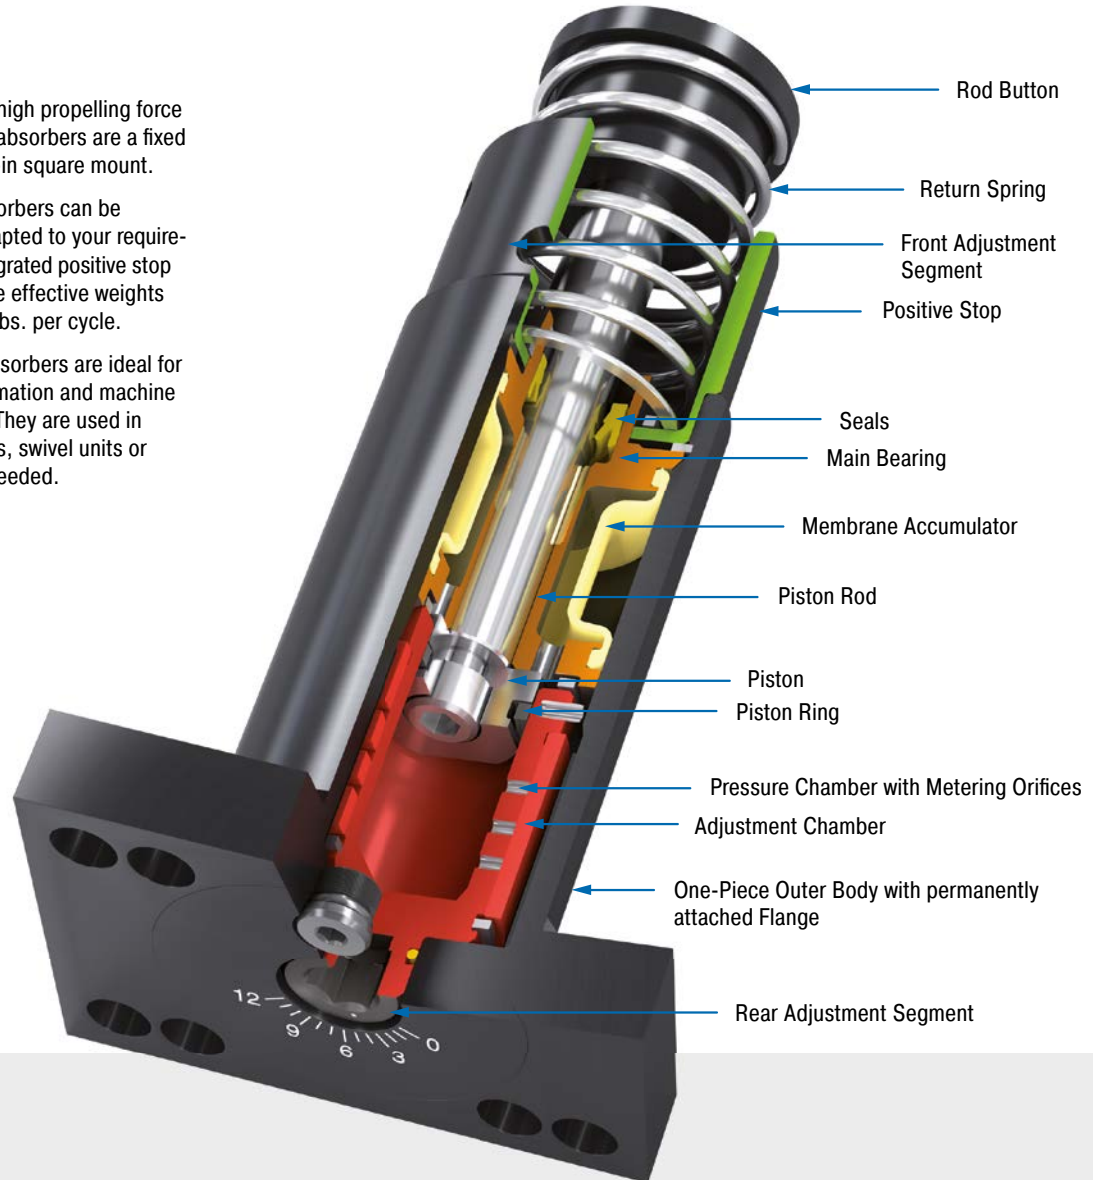

### Technical Data

**Energy capacity:** 8,000 in-lbs/Cycle to 16,000 in-lbs/Cycle

**Impact velocity range:** 0.25 ft/sec to 2 ft/sec

**Operating temperature range:** 10 °F to 150 °F

**Positive stop:** Integrated


**Material:** Outer body: Nitride hardened steel; Piston rod: Hard chrome plated steel; Rod end button: Hardened steel and corrosion-resistant coating; Return spring: Zinc plated or plastic-coated steel

**Damping medium:** Automatic Transmission Fluid (ATF)

**Application field:** Linear slides, Pneumatic cylinders, Swivel units, Handling modules, Machines and plants, Finishing and processing centers, Measuring tables, Tool machines, Machining centers, Locking systems

**Safety information:** External materials in the surrounding area can attack the seal components and lead to a shorter service life. Please contact ACE for appropriate solution suggestions. Do not paint the shock absorbers due to heat emission.

SASL1 1/8-R Rear Flange

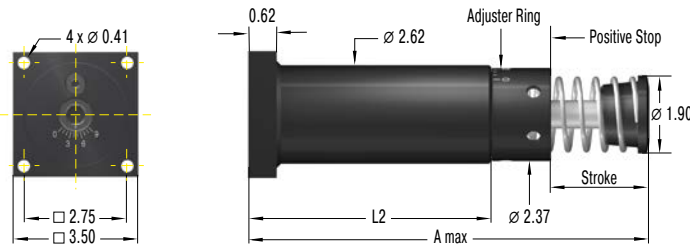


The calculation and selection of the most suitable damper should be carried out or be approved by ACE.

Model Type Prefix

- SASL: Internal accumulator, spring return
- ASLA: Internal accumulator, mechanical return
- ASLS: External accumulator, spring return
- ASL: External accumulator, air or mechanical return

Ordering Example

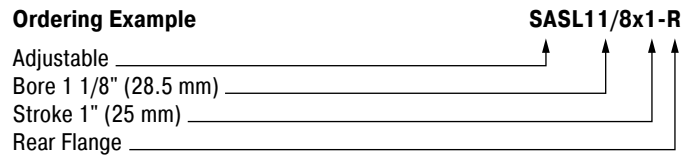

Dimensions

TYPES	Stroke inch	A max. inch	L2 inch
SASL11/8X1-R	0.91	6.88	3.94
SASL11/8X2-R	1.91	8.85	4.88

Performance

TYPES	Max. Energy Capacity			Effective Weight		Weight lbs
	E <sub>3</sub> in-lbs/cycle	E <sub>4</sub> in-lbs/h	E <sub>4</sub> with Air/Oil Tank in-lbs/h	<sup>1</sup> We min. lbs	<sup>1</sup> We max. lbs	
SASL11/8X1-R	8,000	1,250,000	2,500,000	700	700,000	8.10
SASL11/8X2-R	16,000	1,500,000	3,000,000	850	1,300,000	9.20

<sup>1</sup> The effective weight range limits can be raised or lowered to special order.

## SALD1/2 to SALD1 1/8

High energy absorption and a wide effective weight range

### Adjustable


**Energy capacity 1,350 in-lbs/Cycle to 48,000 in-lbs/Cycle**

**Stroke 1 in to 6 in**

Ideal for high-speed moving machines, industrial shock absorbers of the SALD product family feature a built-in external positive stop which prevents damage from bottoming out and a positive work-positioning point.

High energy absorption and a wide damping range lead to huge advantages in practice. Alongside generally more compact designs, these small yet very powerful shock absorbers enable full use of the machine's performance.

These adjustable shock absorbers can be adjusted and precisely adapted to your requirements, making them suitable for a variety of applications in industrial automation and machine engineering applications, especially in automation and gantries.

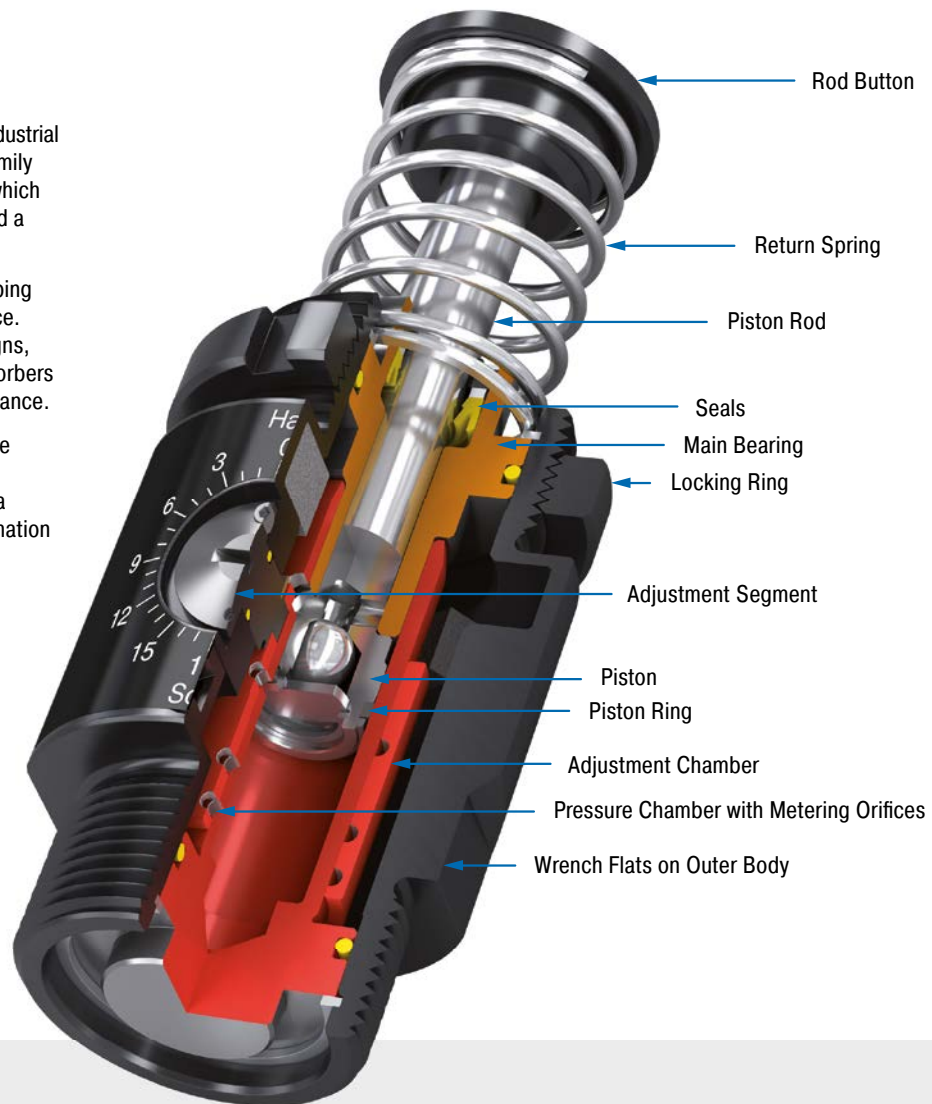

### Technical Data

**Energy capacity:** 1,350 in-lbs/Cycle to 48,000 in-lbs/Cycle

**Impact velocity range:** 1 ft/sec to 15 ft/sec

**Operating temperature range:** 10 °F to 150 °F

**Mounting:** In any position

**Positive stop:** External


**Material:** Outer body: Nitride hardened steel; Piston rod: Hard chrome plated steel; Rod end button: Hardened steel and corrosion-resistant coating; Return spring: Zinc plated or plastic-coated steel

**Damping medium:** Automatic Transmission Fluid (ATF)

**Application field:** Linear slides, Pneumatic cylinders, Swivel units, Handling modules, Machines and plants, Finishing and processing centers, Measuring tables, Tool machines, Machining centers, Locking systems

**Safety information:** External materials in the surrounding area can attack the seal components and lead to a shorter service life. Please contact ACE for appropriate solution suggestions. Do not paint the shock absorbers due to heat emission.

SALD1/2-P Primary

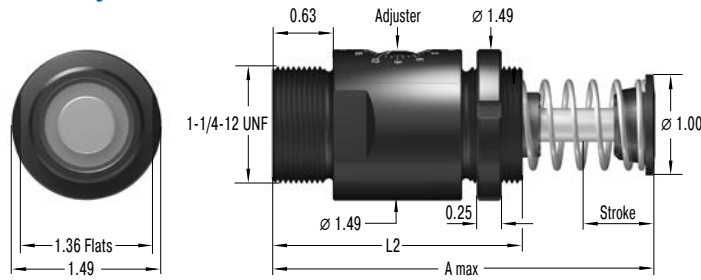


The calculation and selection of the most suitable damper should be carried out or be approved by ACE.

Model Type Prefix

- SALD: Internal accumulator, spring return
- ALDA: Internal accumulator, mechanical return
- ALDS: External accumulator, spring return
- ALD: External accumulator, air or mechanical return

Ordering Example

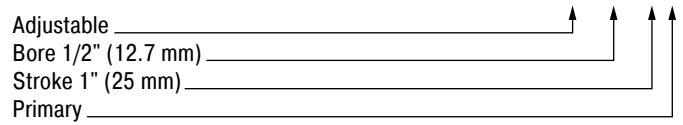

Dimensions

TYPES	Stroke inch	A max. inch	L2 inch
SALD1/2X1-P	0.91	5.44	3.25
SALD1/2X2-P	1.91	7.44	4.25


Performance

TYPES	Max. Energy Capacity			Effective Weight		Weight lbs
	$E_3$ in-lbs/cycle	$E_4$ in-lbs/h	$E_4$ with Air/Oil Tank in-lbs/h	<sup>1</sup> We min. lbs	<sup>1</sup> We max. lbs	
SALD1/2X1-P	1,350	750,000	1,300,000	10	2,700	1.50
SALD1/2X2-P	2,700	870,000	1,400,000	21	5,700	1.83

<sup>1</sup> The effective weight range limits can be raised or lowered to special order.

Adjustable

**SALD3/4-P Primary**

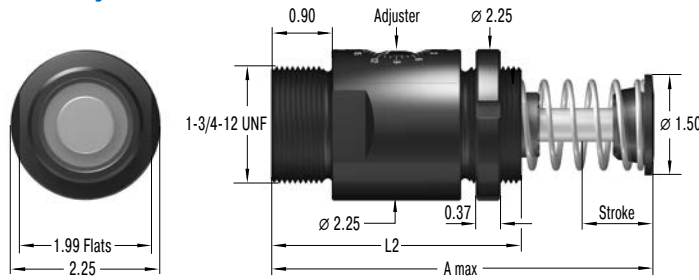


The calculation and selection of the most suitable damper should be carried out or be approved by ACE.

**Model Type Prefix**

- SALD: Internal accumulator, spring return
- ALDA: Internal accumulator, mechanical return
- ALDS: External accumulator, spring return
- ALD: External accumulator, air or mechanical return

**Ordering Example**

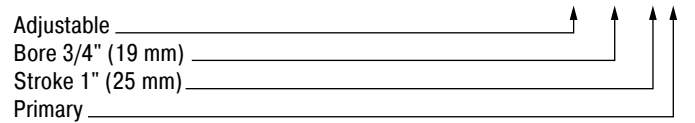


Dimensions			
TYPES	Stroke inch	A max. inch	L2 inch
SALD3/4X1-P	0.91	5.94	3.97
SALD3/4X2-P	1.91	7.94	4.97
SALD3/4X3-P	2.91	9.94	5.97

Performance						
TYPES	Max. Energy Capacity			Effective Weight		Weight lbs
	E <sub>3</sub> in-lbs/cycle	E <sub>4</sub> in-lbs/h	E <sub>4</sub> with Air/Oil Tank in-lbs/h	<sup>1</sup> We min. lbs	<sup>1</sup> We max. lbs	
SALD3/4X1-P	3,000	1,100,000	1,600,000	20	18,000	3.24
SALD3/4X2-P	6,000	1,300,000	2,000,000	35	32,000	3.99
SALD3/4X3-P	9,000	1,600,000	2,400,000	50	46,000	4.94

<sup>1</sup> The effective weight range limits can be raised or lowered to special order.

SALD1 1/8-P Primary

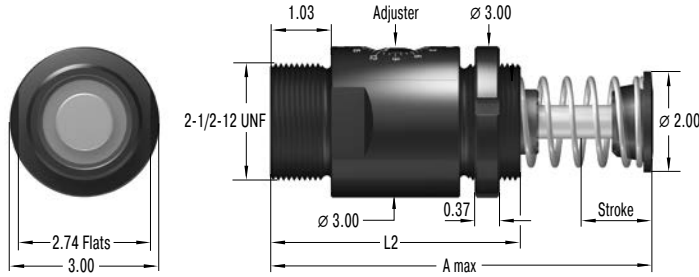


The calculation and selection of the most suitable damper should be carried out or be approved by ACE.

Model Type Prefix

- SALD: Internal accumulator, spring return
- ALDA: Internal accumulator, mechanical return
- ALDS: External accumulator, spring return
- ALD: External accumulator, air or mechanical return

Ordering Example

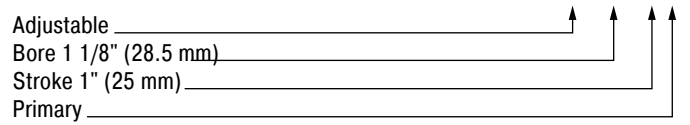

Dimensions

TYPES	Stroke inch	A max. inch	L2 inch
SALD11/8X2-P	1.91	8.88	5.50
SALD11/8X4-P	3.91	12.88	7.50
SALD11/8X6-P	5.91	17.75	9.50

Performance

TYPES	Max. Energy Capacity			Effective Weight		Weight lbs
	E <sub>3</sub> in-lbs/cycle	E <sub>4</sub> in-lbs/h	E <sub>4</sub> with Air/Oil Tank in-lbs/h	<sup>1</sup> We min. lbs	<sup>1</sup> We max. lbs	
SALD11/8X2-P	16,000	1,500,000	3,000,000	120	50,000	8.75
SALD11/8X4-P	32,000	2,000,000	4,000,000	160	100,000	11.51
SALD11/8X6-P	48,000	2,500,000	5,000,000	200	150,000	15.52

<sup>1</sup> The effective weight range limits can be raised or lowered to special order.

## SALDN3/4

High energy absorption and a wide effective weight range

### Adjustable


**Energy capacity 3,450 in-lbs/cycle to 10,350 in-lbs/cycle**

**Stroke 1 in to 3 in**

SALDN industrial shock absorbers offer high performance levels and a long service life, even in the most difficult environments. These shock absorbers feature an integrated positive stop and are designed to handle effective weights from 3,450 to 10,350 in-lbs. per cycle.

High energy absorption in a compact design and a wide damping range lead to huge advantages in practice. Alongside generally more compact designs, these small yet very powerful shock absorbers enable full use of the machine's performance.

These adjustable shock absorbers can be adjusted and precisely adapted to your requirements, making them suitable for a variety of applications in industrial automation and machine engineering applications, especially in automation and gantries.

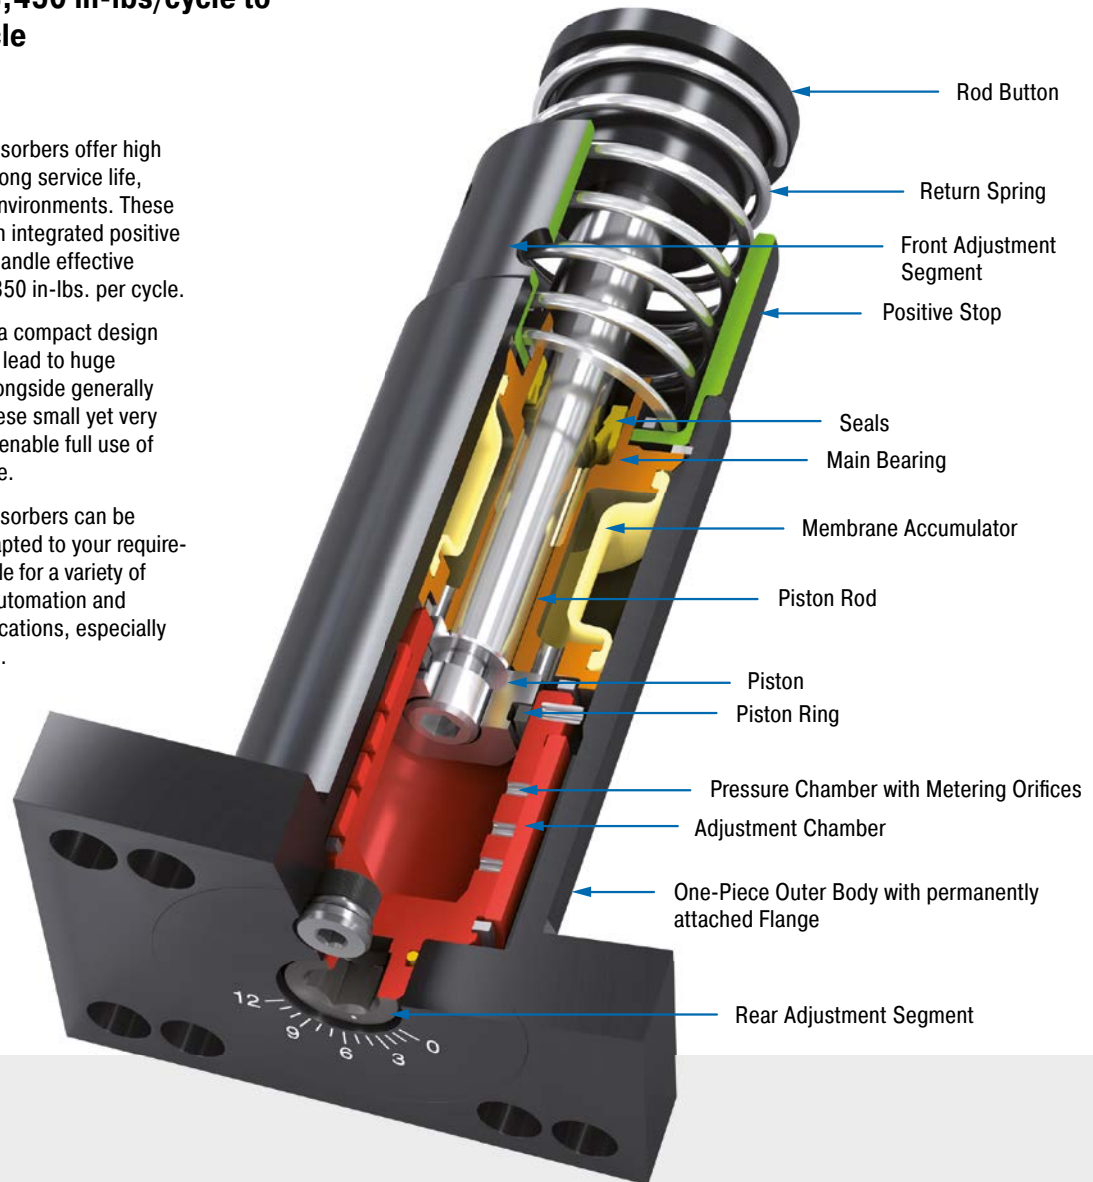

### Technical Data

**Energy capacity:** 3,450 in-lbs/cycle to 10,350 in-lbs/cycle

**Impact velocity range:** 0.5 ft/sec to 16.5 ft/sec

**Operating temperature range:** 10 °F to 150 °F

**Mounting:** In any position

**Positive stop:** Integrated

**Adjustment:** Rear of shock

**Damping medium:** Automatic Transmission Fluid (ATF)

**Application field:** Linear slides, Pneumatic cylinders, Swivel units, Handling modules,

Machines and plants, Finishing and processing centers, Measuring tables, Tool machines, Machining centers, Locking systems


**Note:** ACE recommends selecting a model with 20 % more capacity than your calculations indicate necessary. This extra capacity allows for changes in weight, velocity or cycle rates increase in the future.

**Safety information:** External materials in the surrounding area can attack the seal components and lead to a shorter service life. Please contact ACE for appropriate solution suggestions. Do not paint the shock absorbers due to heat emission.

**On request:** Special oils, nickel-plated, increased corrosion protection, mounting inside air cylinders, additional impact velocity ranges or other special options are available on request.



**SALDN3/4-RF Front Flange**

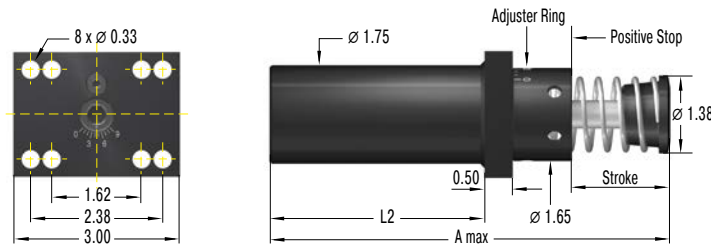


The calculation and selection of the most suitable damper should be carried out or be approved by ACE.

**Model Type Prefix**

- SALDN: Internal accumulator, spring return
- ALDAN: Internal accumulator, mechanical return
- ALDSN: External accumulator, spring return
- ALDN: External accumulator, air or mechanical return

**Ordering Example**

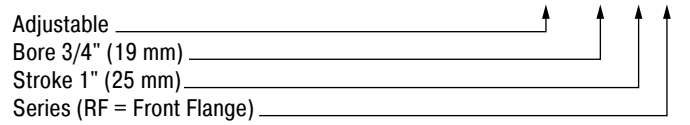

**Dimensions**

TYPES	Stroke inch	A max. inch	L2 inch
SALDN3/4X1-RF	0.98	5.69	3.22
SALDN3/4X2-RF	1.97	7.69	4.22
SALDN3/4X3-RF	2.95	9.69	5.22


**Performance**

TYPES	Max. Energy Capacity			Effective Weight		Return Force		Return Time s	Side Load Angle		Weight lbs
	E <sub>3</sub> in-lbs/cycle	E <sub>4</sub> in-lbs/h	E <sub>4</sub> with Air/Oil Tank in-lbs/h	<sup>1</sup> We min. lbs	<sup>1</sup> We max. lbs	min. lbs	max. lbs		min. °	max. °	
SALDN3/4X1-RF	3,450	950,000	1,400,000	95	22,000	15.1	22.8	0.03	4	2.49	
SALDN3/4X2-RF	6,900	1,000,000	1,700,000	150	32,000	15.1	32.2	0.08	3	3.02	
SALDN3/4X3-RF	10,350	1,300,000	2,000,000	155	33,000	11.7	40.3	0.11	2	3.51	

<sup>1</sup> The effective weight range limits can be raised or lowered to special order.

Adjustable

**SALDN3/4-RR Rear Flange**

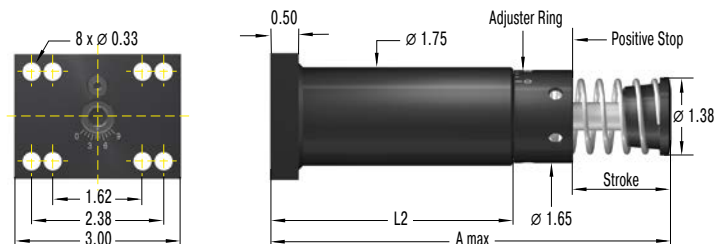


The calculation and selection of the most suitable damper should be carried out or be approved by ACE.

**Model Type Prefix**

- SALDN: Internal accumulator, spring return
- ALDN: Internal accumulator, mechanical return
- ALDSN: External accumulator, spring return
- ALDN: External accumulator, air or mechanical return

**Ordering Example**

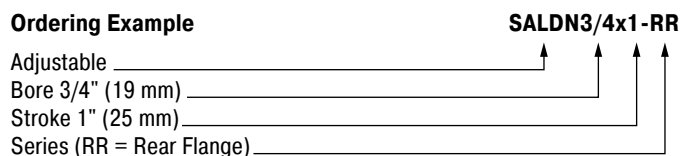

**Dimensions**

TYPES	Stroke inch	A max. inch	L2 inch
SALDN3/4X1-RR	0.98	5.69	3.22
SALDN3/4X2-RR	1.97	7.69	4.22
SALDN3/4X3-RR	2.95	9.69	5.22

**Performance**

TYPES	Max. Energy Capacity			Effective Weight		Return Force min. lbs	Return Force max. lbs	Return Time s	Side Load Angle max. °	Weight lbs
	E <sub>3</sub> in-lbs/cycle	E <sub>4</sub> in-lbs/h	E <sub>4</sub> with Air/Oil Tank in-lbs/h	<sup>1</sup> We min. lbs	<sup>1</sup> We max. lbs					
SALDN3/4X1-RR	3,450	950,000	1,400,000	95	22,000	15.1	22.8	0.03	4	2.49
SALDN3/4X2-RR	6,900	1,000,000	1,700,000	150	32,000	15.1	32.2	0.08	3	3.02
SALDN3/4X3-RR	10,350	1,300,000	2,000,000	155	33,000	11.7	40.3	0.11	2	3.51

<sup>1</sup> The effective weight range limits can be raised or lowered to special order.

# High Performance

## for PET Stretch Blow Machines

**NEW**



## PET 20 and PET 27

**20 million cycles – up to 225 °F – aluminium outer body  
hardened pressure chamber – corrosion protection**


=

extended service life – low-wear – faster  
reduced downtime – improved system performance  
increased production volume – high cost efficiency

For all information see our Website [www.acecontrols.com](http://www.acecontrols.com)

**M33x1.5**


**250-0294**  
Side Foot Mounting Kit

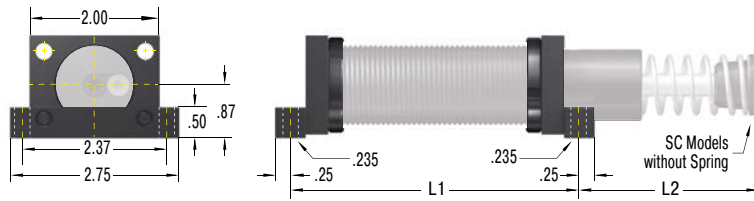

Dimensions		
TYPES	L1 inch	L2 inch
MC, MA, ML3325	3.75	1.94
MC, MA, ML3350	4.75	2.94
SC3325	5.31	1.94
SC3350	7.31	2.94
SCS33-25	3.75	1.94
SCS33-50	4.75	2.94

250-0294 = 1 locknut, 2 flanges, 2 bars, 4 screws M6x40, DIN 912  
 Torque max.: 97 in-lbs  
 Clamping torque: 797 in-lbs  
 Bolts to mount assembled shock & mount not included.


**250-0323**  
Clevis Mount Assembly

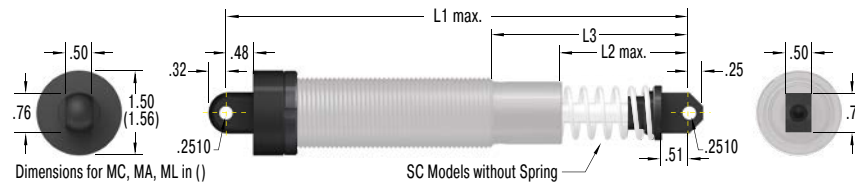


Dimensions			
TYPES	L1 max. inch	L2 max. inch	L3 inch
MC, MA, ML3325	6.58	1.36	2.64
MC, MA, ML3350	8.58	2.36	3.64
SC3325	8.14	1.37	2.65
SC3350	11.14	2.37	3.65

Use positive stop at both ends of travel.


**250-0292**  
Locking Ring




**250-0091**  
Poly Button



**250-0293**  
Rectangular Flange




**250-0130**  
Steel Shroud




<sup>1</sup> Total installation length of the shock absorber inc. steel shroud

**250-0730**  
Steel Shroud




<sup>1</sup> Total installation length of the shock absorber inc. steel shroud

**250-0427**  
Stop Bar




**250-0071**  
Flanged Stop Collar

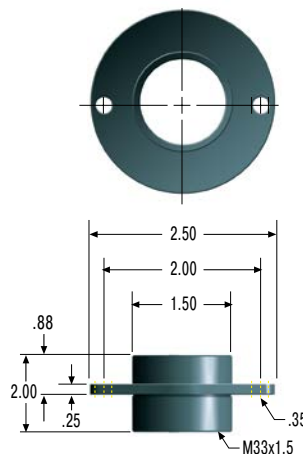

Mounting, installation, ... see page 96.

### M45x1.5

#### 250-0300 Side Foot Mounting Kit

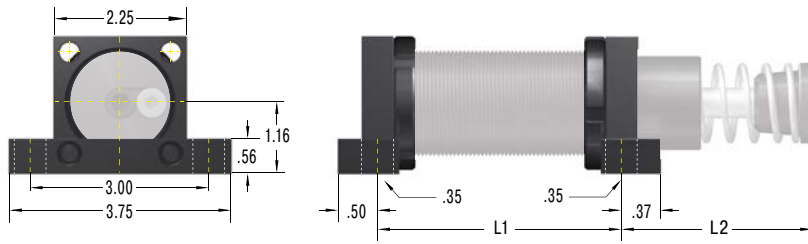


#### Dimensions

TYPES	L1 inch	L2 inch
MC, MA, ML4525	3.50	1.94
MC, MA, ML4550	4.38	3.06
MC, MA4575	5.38	4.06
SC4525	5.10	2.09
SC4550	7.10	3.09
SCS45-25	3.50	1.94
SCS45-50	4.38	3.06
SCS45-75	5.38	4.06

250-0300 = 1 locknut, 2 flanges, 2 bars, 4 screws M8x50, DIN 912  
 Torque max.: 239 in-lbs  
 Clamping torque: 3,098 in-lbs  
 Bolts to mount assembled shock & mount not included.

#### 250-0325 Clevis Mount Assembly

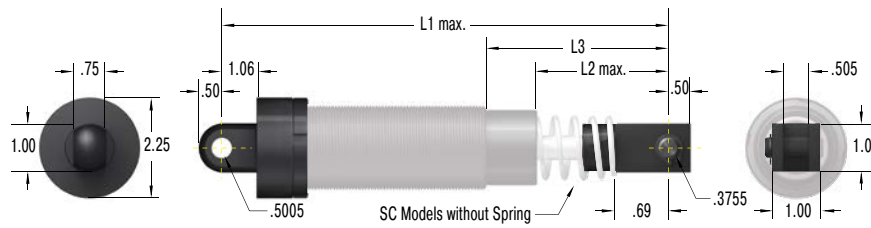


#### Dimensions


TYPES	L1 max. inch	L2 max. inch	L3 inch
MC, MA, ML4525	7.85	1.51	2.57
MC, MA, ML4550	9.85	2.51	3.57
MC, MA4575	11.85	3.51	4.57
SC4525	9.60	1.51	2.57
SC4550	12.60	2.51	3.57

Use positive stop at both ends of travel.


#### 250-0297 Locking Ring




#### 250-0092 Poly Button




#### 250-0298 Square Flange



#### 250-0299 Rectangular Flange




#### 250-0778 Steel Shroud




<sup>1</sup> Total installation length of the shock absorber inc. steel shroud

#### 250-0731 Steel Shroud




<sup>1</sup> Total installation length of the shock absorber inc. steel shroud

#### 250-0639 Stop Bar




#### 250-0073 Flanged Stop Collar

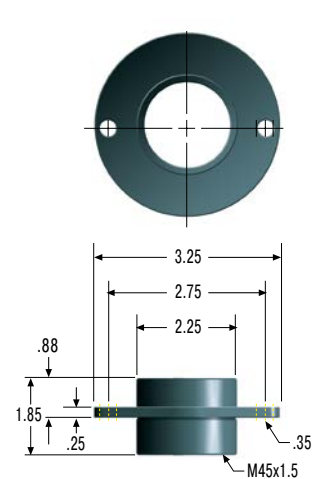

**M64x2**


**250-0304**  
Side Foot Mounting Kit

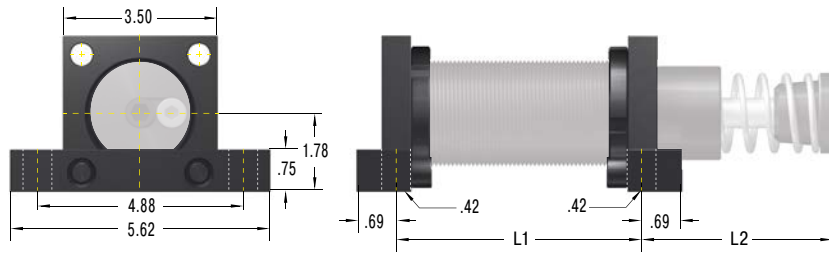

Dimensions		
TYPES	L1 inch	L2 inch
ML6425	4.00	2.54
MC, MA, ML6450	5.00	3.54
MC, MA64100	7.00	5.54
MC, MA64150	9.00	8.42
SCS64-50	5.00	3.54
SCS64-100	7.00	5.54
SCS64-150	9.00	8.42

250-0304 = 1 locknut, 2 flanges, 2 bars, 4 screws M10x80, DIN 912  
 Torque max.: 443 in-lbs  
 Clamping torque: 3,098 in-lbs  
 Bolts to mount assembled shock & mount not included.


**250-0626**  
Clevis Mount Assembly

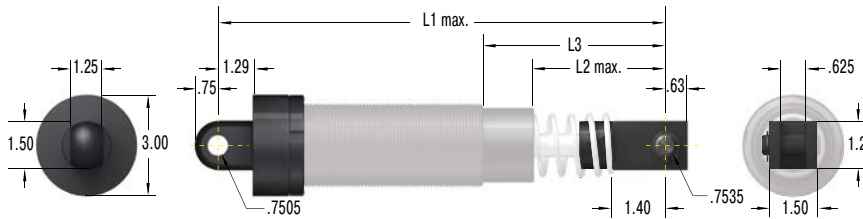


Dimensions			
TYPES	L1 max. inch	L2 max. inch	L3 inch
ML6425	10.12	2.31	3.75
MC, MA, ML6450	12.12	3.31	4.75
MC, MA64100	16.12	5.31	6.75
MC, MA64150	20.87	8.06	9.50

Use positive stop at both ends of travel.


**250-0301**  
Locking Ring




**250-0093**  
Poly Button



**250-0302**  
Square Flange




**250-0787**  
Steel Shroud




<sup>1</sup> Total installation length of the shock absorber inc. steel shroud

**250-0839**  
Steel Shroud




<sup>1</sup> Total installation length of the shock absorber inc. steel shroud

**250-0640**  
Stop Bar




For MC/MA/ML6425M to 64100M models

**250-0641**  
Stop Bar




For MC/MA/ML64150M model

**250-0077**  
Flanged Stop Collar

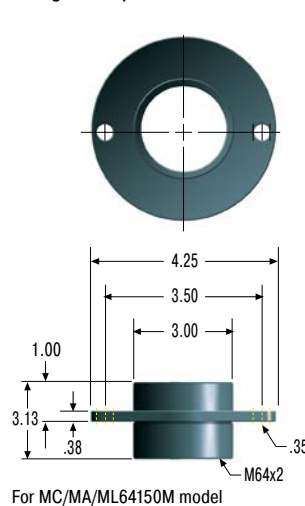


**250-0075**  
Flanged Stop Collar

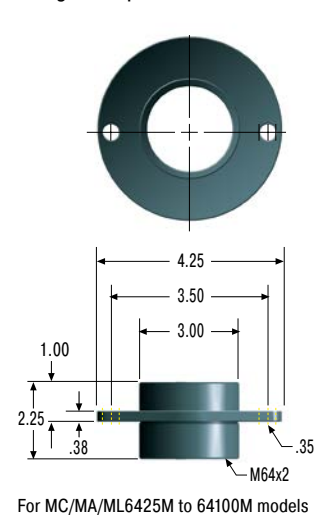

Mounting, installation, ... see page 96.

### 1-1/4-12 UNF

#### 250-0015 Side Foot Mounting Kit

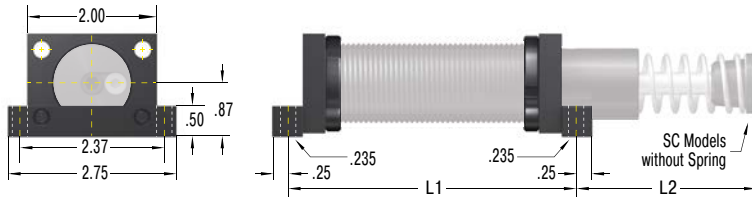


#### Dimensions

TYPES	L1 inch	L2 inch
MC, MA, ML3325	3.75	1.94
MC, MA, ML3350	4.75	2.94
SC3325	5.31	1.94
SC3350	7.31	2.94
SCS33-25	3.75	1.94
SCS33-50	4.75	2.94

250-0015 = 1 locknut, 2 flanges, 2 bars, 4 screws 1-1/4-12 UNF, DIN 912  
 Torque max.: 97 in-lbs  
 Clamping torque: 797 in-lbs  
 Bolts to mount assembled shock & mount not included.

#### 250-0225 Clevis Mount Assembly

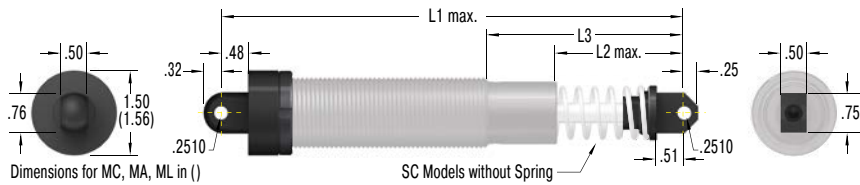


#### Dimensions


TYPES	L1 max. inch	L2 max. inch	L3 inch
MC, MA, ML3325	6.58	1.36	2.64
MC, MA, ML3350	8.58	2.36	3.64
SC3325	8.14	1.37	2.65
SC3350	11.14	2.37	3.65

Use positive stop at both ends of travel.


#### 250-0038 Locking Ring




#### 250-0091 Poly Button



#### 250-0016 Rectangular Flange




#### 250-0130 Steel Shroud




<sup>1</sup> Total installation length of the shock absorber inc. steel shroud

#### 250-0730 Steel Shroud




<sup>1</sup> Total installation length of the shock absorber inc. steel shroud

#### 250-0426 Stop Bar




#### 250-0070 Flanged Stop Collar

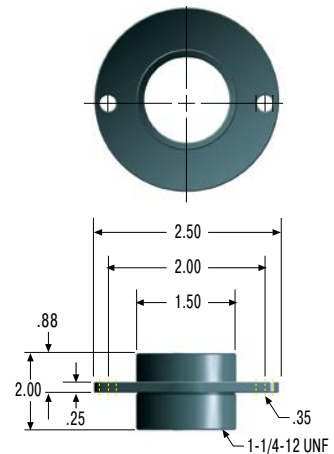

Mounting, installation, ... see page 96.

### 1-3/4-12 UNF


#### 250-0025 Side Foot Mounting Kit

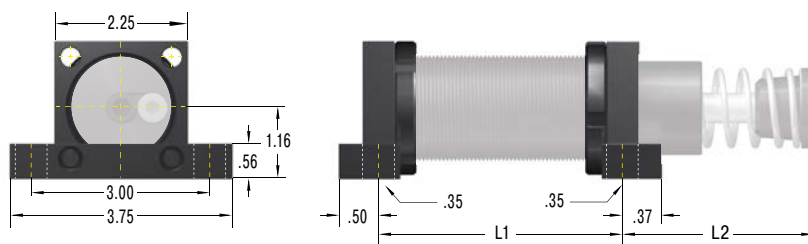

Dimensions		
TYPES	L1 inch	L2 inch
MC, MA, ML4525	3.50	1.94
MC, MA, ML4550	4.38	3.06
MC, MA4575	5.38	4.06
SC4525	5.10	2.09
SC4550	7.10	3.09
SCS45-25	3.50	1.94
SCS45-50	4.38	3.06
SCS45-75	5.38	4.06

250-0025 = 1 locknut, 2 flanges, 2 bars, 4 screws 1-3/4-12 UNF, DIN 912  
 Torque max.: 239 in-lbs  
 Clamping torque: 3,098 in-lbs  
 Bolts to mount assembled shock & mount not included.


#### 250-0324 Clevis Mount Assembly

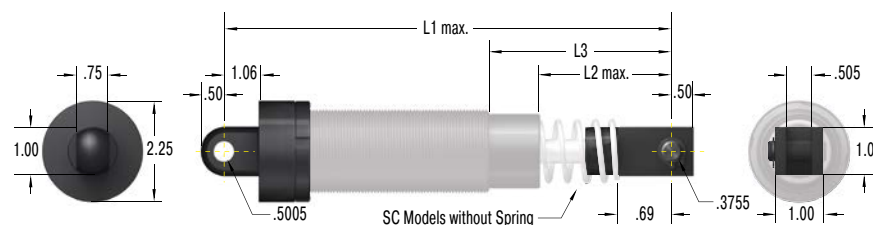


Dimensions			
TYPES	L1 max. inch	L2 max. inch	L3 inch
MC, MA, ML4525	7.85	1.51	2.57
MC, MA, ML4550	9.85	2.51	3.57
MC, MA4575	11.85	3.51	4.57
SC4525	9.60	1.51	2.57
SC4550	12.60	2.51	3.57

Use positive stop at both ends of travel.

#### 250-0041 Locking Ring




#### 250-0092 Poly Button




Supplied ready mounted onto the shock absorber.


#### 250-0023 Square Flange



#### 250-0024 Rectangular Flange




#### 250-0778 Steel Shroud




<sup>1</sup> Total installation length of the shock absorber inc. steel shroud

#### 250-0731 Steel Shroud




<sup>1</sup> Total installation length of the shock absorber inc. steel shroud

#### 250-0428 Stop Bar



#### 250-0072 Flanged Stop Collar

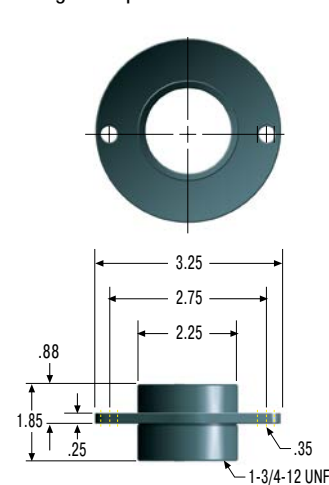


Mounting, installation, ... see page 96.



### 2-1/2-12 UNF

#### 250-0030

##### Side Foot Mounting Kit

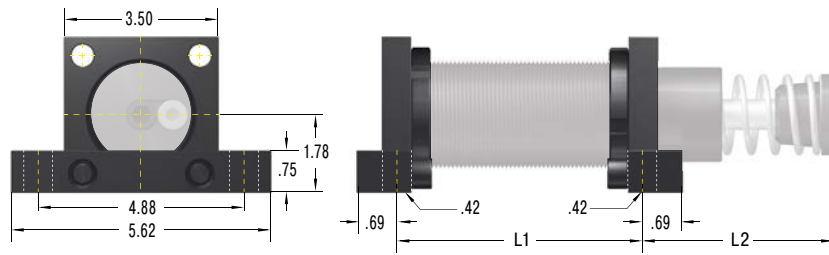

Dimensions		
TYPES	L1 inch	L2 inch
ML6425	4.00	2.54
MC, MA, ML6450	5.00	3.54
MC, MA64100	7.00	5.54
MC, MA64150	9.00	8.42
SCS64-50	5.00	3.54
SCS64-100	7.00	5.54
SCS64-150	9.00	8.42

250-0030 = 1 locknut, 2 flanges, 2 bars, 4 screws 2-1/2-12 UNF, DIN 912


Torque max.: 442.5 in-lbs

Clamping torque: 3,098 in-lbs

Bolts to mount assembled shock & mount not included.

#### 250-0625


##### Clevis Mount Assembly

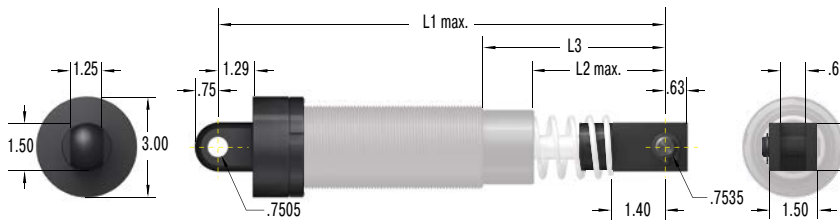


Dimensions			
TYPES	L1 max. inch	L2 max. inch	L3 inch
ML6425	10.12	2.31	3.75
MC, MA, ML6450	12.12	3.31	4.75
MC, MA64100	16.12	5.31	6.75
MC, MA64150	20.87	8.06	9.50

Use positive stop at both ends of travel.

#### 250-0042 Locking Ring




#### 250-0093 Poly Button




Supplied ready mounted onto the shock absorber.

#### 250-0028 Square Flange




#### 250-0787 Steel Shroud




<sup>1</sup> Total installation length of the shock absorber inc. steel shroud

#### 250-0839 Steel Shroud




<sup>1</sup> Total installation length of the shock absorber inc. steel shroud

#### 250-0430 Stop Bar




For MC/MA/ML6425 to 64100 models

#### 250-0432 Stop Bar




For MC/MA/ML64150 models

#### 250-0074 Flanged Stop Collar

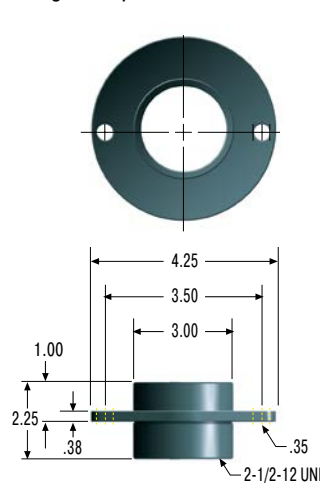


For MC/MA/ML 6425 to 64100 models

#### 250-0076 Flanged Stop Collar

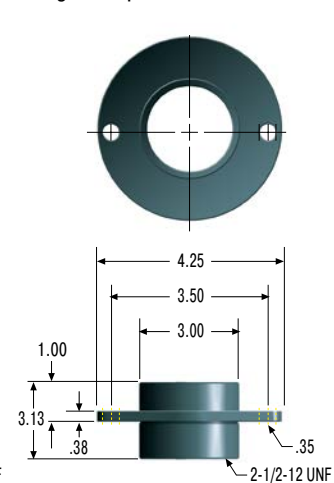

For MC/MA/ML64150M model

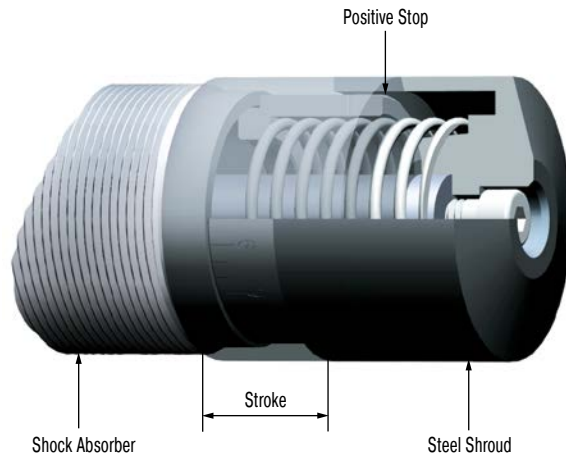

### Steel Shroud

For industrial shock absorbers with a 1 or 2 in stroke.

Grinding beads, sand, welding splatter, paints and adhesives etc. can adhere to the piston rod. They then damage the rod seals and the shock absorber quickly fails. In many cases the installation of the optional steel shroud can provide worthwhile protection and increase lifetime.

#### Material


Hardened high tensile steel

#### Mounting information

To mount the steel shroud it's necessary to remove the rod end button of the shock absorber.

#### Safety information

When installing don't forget to allow operating space for the shroud to move as the shock absorber is cycled.

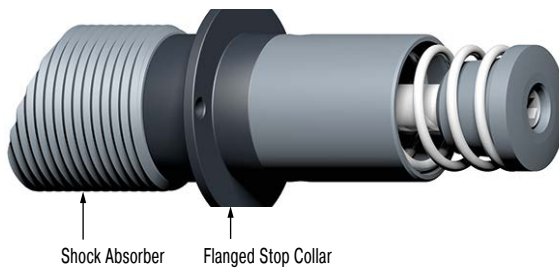


### Flanged Stop Collar

Flanged stop collars provide industrial shock absorbers with a secure front mount and a positive mechanical stop. No specific mounting panel thickness is required.

#### Material

Hardened high tensile steel

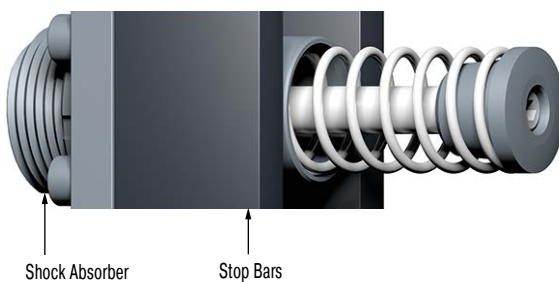

### Stop Bar

Stop bars are used in pairs and come two per package for assembly. Hard metric stop bars are available upon request.

#### Material


Hardened high tensile steel

# Application Examples


## MC33

### Quicker, gentle positioning

ACE industrial shock absorbers optimize portals for machine loading and increase productivity. This device is driven by piston rodless pneumatic cylinders, where two gripper slides are moving independently of each other at speeds of 6.56 ft/sec to 8.20 ft/sec, is equipped with industrial shock absorbers as brake systems. Their function is to stop a mass of 55 lbs up to 540 times per hour. The MC3350-1-S model was chosen for this application, allowing easy and extremely accurate adjustment of the end positions of the adjustable limit stops. In comparison to brake systems with other function principles, shock absorbers allow higher travel speeds and shorter cycle sequences.

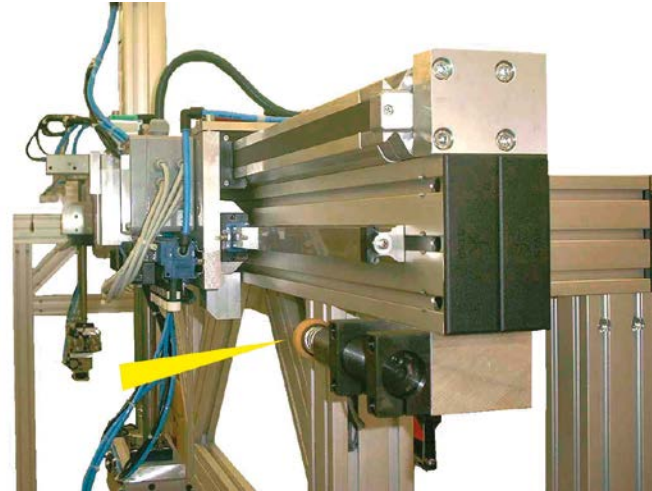


Industrial shock absorbers optimize portal operation

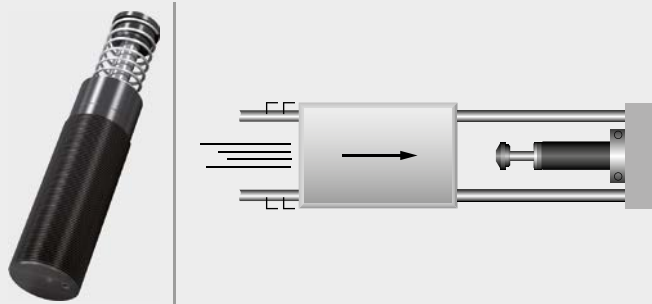


## MC45

### MAGNUM protection of carriage construction

Serving a similar purpose, several ACE dampers are installed in Jada, the triple-axis, free-moving badminton robot. In order for the badminton robot to be capable of playing, it must be able to change direction in the shortest time possible. Jada is designed therefore to brake at a maximum of 30 m/s<sup>2</sup>. For this task, linear modules are limited by the use of industrial shock absorbers of the type MC4575-0. Miniature shock absorbers and profile dampers are also installed at the location of the „racket hand“. In all cases, the modern ACE machine elements serve to protect the end positions of the construction.

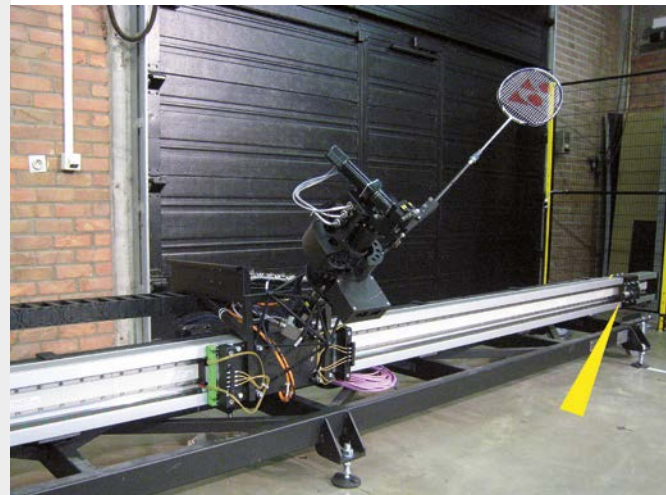

A variety of different dampers are used to slow the rapid movements of a badminton robot  
FMTC vzw, 3001 Leuven, Belgium

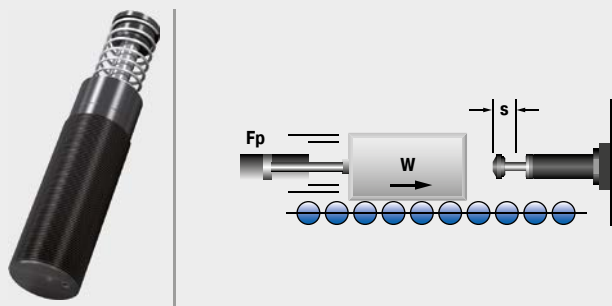


Issue 04.2018 – Specifications subject to change

### MC64-VA

#### MAGNUM damper for safety under water

A pipeline from the rig to the well head that is as flexible as possible is considered to be a quick-disconnect connection in an emergency. Nevertheless, this connection made at the oil source on the sea floor is an Achilles heel. If the connection snaps or if it cannot be separated quickly enough during hazards such as storms, unpredictable, often serious consequences can hardly be prevented. With the so-called XR connector, the safety at this critical point is significantly increased. In the innovative design 10 industrial shock absorbers per connection from the MAGNUM series from ACE master this important task.




MAGNUMS allow for emergency quick disconnection of the pipelines from the oil rigs

Subsea Technologies Ltd, Aberdeen, AB12 3AY, UK

### MC64M

#### Emergency exits made safer with MAGNUM shock absorbers

MAGNUM 64150 industrial shock absorbers are integrated into the overall safety design for the Amsterdam metro system. In contrast to previous solutions, ACE shocks ensure rapid opening and stopping for a five-ton barrier located at the end of an emergency escape route. In this application, over 45,000 in-lbs of energy are able to be absorbed per stroke. Through installing shock absorbers in end positions of the design, over 140,000 lbs of effective weight are able to be absorbed. ACE provided an excellent solution, even with an impact speed of approximately 6 feet per second and the barrier exit grille at an unusual impact angle.




A heavy, five-ton barrier safely stopped by MAGNUM shock absorbers

J.P. van Eesteren B.V., 1006 BD Amsterdam, Netherlands


### MA/ML33

#### Safe swiveling

ACE industrial shock absorbers offer safety to spare for rotation or braking of a large telescope. The optical system of this telescope for special observations is moveable in two space coordinates. The structure in which the telescope is mounted weighs 33,069 lbs and consists of a turntable with drives and two wheel disks rotating on bearings. It enables a rotation by  $\pm 90^\circ$  from horizon to horizon. To safeguard the telescope in case of overshooting the respective swiveling limits, ML3325 industrial shock absorbers are used as braking elements. Should the telescope inadvertently overshoot the permissible swivel range, they will safely damp the travel of the valuable telescope.

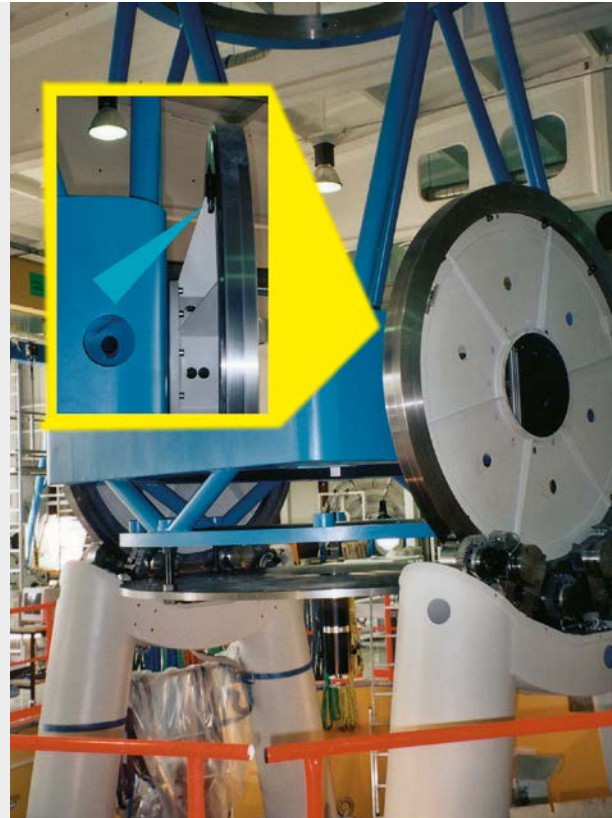

Perfect overshoot protection for precision telescope




### MA/ML64

#### MAGNUM helps in the fight against people not buckling up

The Central-Hessian police department has developed an accident simulator with the help of ACE Stoßdämpfer GmbH aimed at significantly increasing the number of road traffic seatbelt wearers. The mobile simulator demonstrates strikingly that the smallest impact velocities lead to enormous forces, even when wearing seat belts, and can cause serious injuries when not. Adjustable MAGNUM type MA64150 dampers are installed to protect the simulator passengers and the end points of the construction at various speeds and moving masses. These are the largest adjustable dampers of the ACE product range; stronger special constructions are possible at any time.



MAGNUM dampers ensure the reliable braking of moving masses on the seat and the protection of the entire carriage construction  
Central Hessian Police Department, Karl-Glückner-Straße 2, 35394 Gießen, Germany

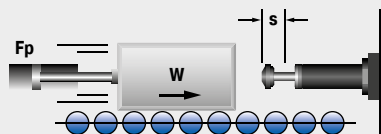

## Heavy Industrial Shock Absorbers

### Effective shock absorption for heavy loads

**The heavy industrial shock absorbers from ACE top off the company's offerings in damping technology. This ACE category gives Designers a choice between self-compensating and adjustable machine elements.**

Whichever design is chosen, this type of shock absorber impresses with its robustness and operational readiness wherever heavy loads need to be reliably stopped on-the-spot and at a precise point.

The CA4 models can absorb up to 1,120,000 in/lbf (126,500 Nm) of energy. The series of heavy duty, self-compensating "CA" types are equally suitable for use as an emergency stop as are the adjustable types with the designations "A". The range of effective loads covered is increased considerably for this purpose.



## Heavy Industrial Shock Absorbers



### CA2 to CA4

Page 102

Self-Compensating  
**Deceleration of heavy loads**  
 Portal systems, Machines and plants, Conveyor systems, Crane systems,



### A1 1/2 to A3

Page 106

Adjustable  
**Deceleration of heavy loads and progressive adjustment**  
 Portal systems, Machines and plants, Conveyor systems, Crane systems



Rugged and powerful

Gently stops heavy loads with high precision

Also ideal for emergency stop utilization

Safe, reliable production

Maintenance-free and ready-to-install

Special versions available

# CA2 to CA4

## Deceleration of heavy loads

### Self-Compensating


**Energy capacity 21,000 in-lbs/Cycle to 1,120,000 in-lbs/Cycle**

**Stroke 2 in to 16 in**

**Powerful:** The weight of these high capacity absorbers are between 28.2 lbs and 322 lbs. (12.8 and 146 kg). They complement ACE's product range of self-compensating shock absorbers. All models from this product family are designed for applications where robustness and large energy absorption are important.

ACE uses our proprietary custom calculation program to design each shock absorber for the specific customer application. Customization helps reduce the risk of crashes and incorrect product sizing. The CA models can absorb up to 1,119,620 in-lbs (126,500 Nm) of energy and can be used in the area of effective weights between 1,543 lbs and 718,707 lbs. (700 kg and 326,000 kg). The combination of being extremely solid, absorbing high levels of energy and having a large damping range makes them invaluable. Self-compensating shock absorbers react to changing energy conditions, without adjustment.

These heavy duty self-compensating industrial shock absorbers are primarily used in heavy industrial engineering e.g. on lift bridges and steel structures or for damping sluice systems.

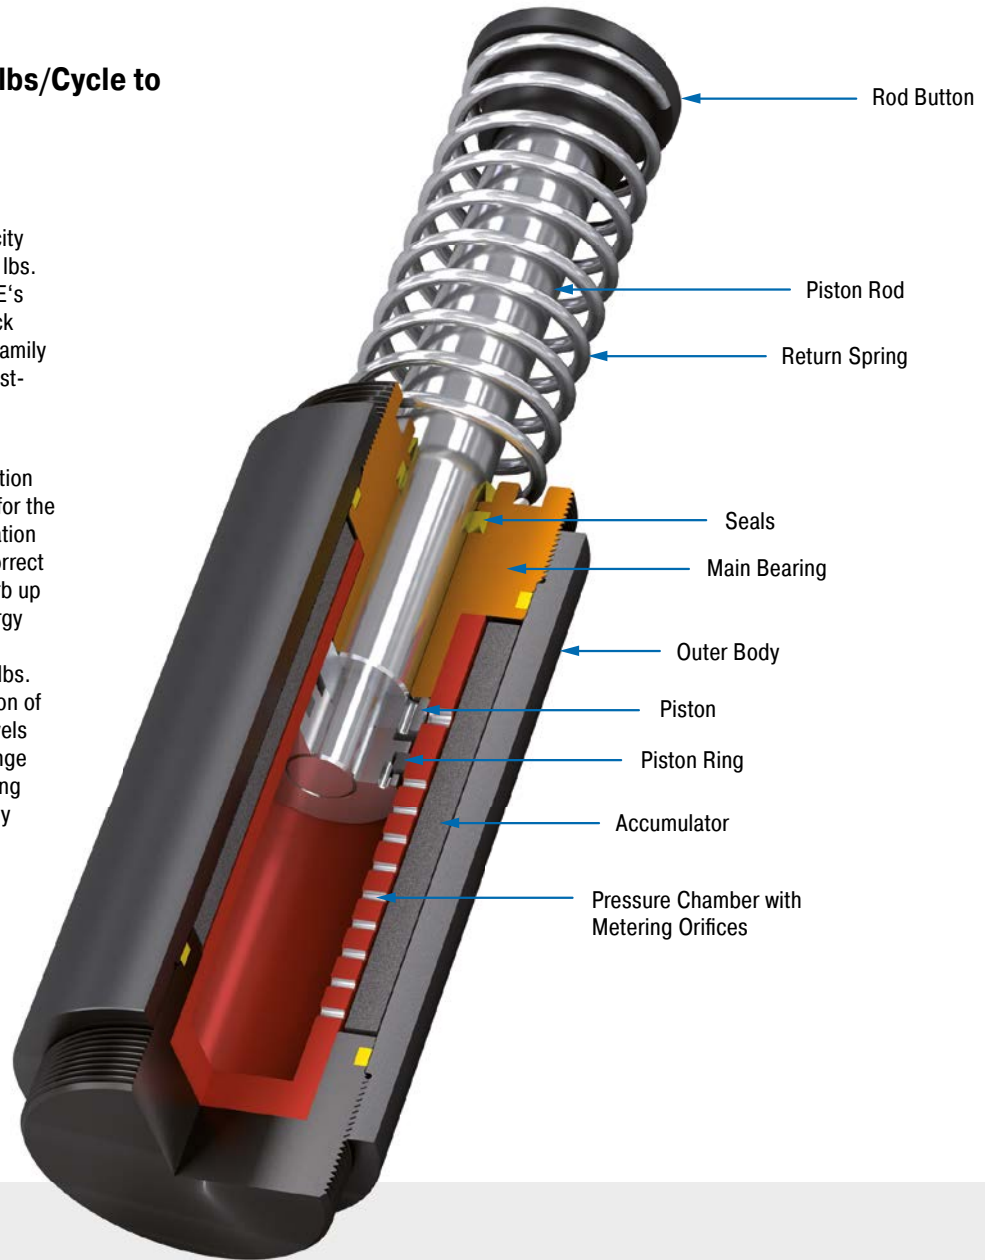

### Technical Data

**Energy capacity:** 21,000 in-lbs/Cycle to 1,120,000 in-lbs/Cycle

**Impact velocity range:** 1 ft/sec to 16.5 ft/sec. Other speeds on request.

**Operating temperature range:** 10 °F to 150 °F. Other temperatures on request.

**Mounting:** In any position

**Positive stop:** External positive stops 0.10" to 0.12" before the end of stroke provided by the customer.

**Material:** Outer body: Steel corrosion-resistant coating; Piston rod: Hard chrome plated steel; Rod end button: Hardened steel and corrosion-resistant coating; Return spring: Zinc plated steel

**Damping medium:** Automatic Transmission Fluid (ATF)

**Application field:** Portal systems, Machines and plants, Conveyor systems, Crane systems, Loading and lifting equipment, Shelf storage systems, Heavy load applications, Swivel units

**Note:** For emergency use only applications and for continuous use it is possible to exceed the published max. capacity ratings. In this case, please consult ACE.


**Safety information:** External materials in the surrounding area can attack the seal components and lead to a shorter service life. Please contact ACE for appropriate solution sugges-

tions. Do not paint the shock absorbers due to heat emission.


**On request:** Special oils, nickel-plated, increased corrosion protection or other special options are available on request.




### CA2-F Front Flange

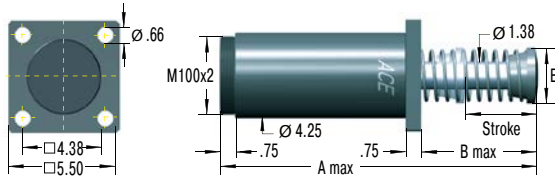

### CA2-R Rear Flange

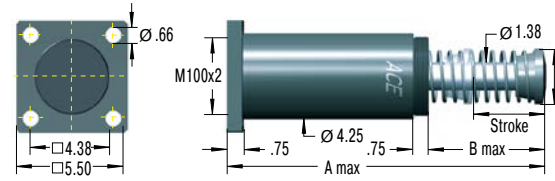

### CA2-C Clevis Mount

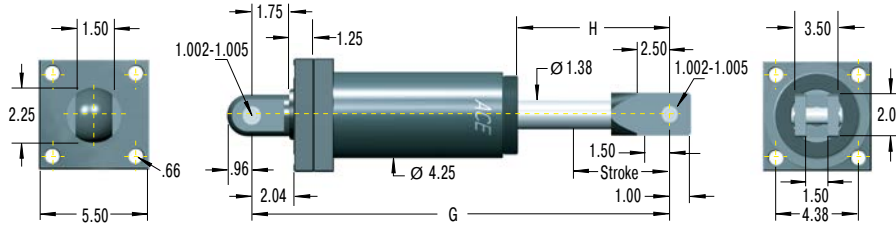

### Model Type Prefix

#### Standard Models

CA: Self-contained with return spring, self-compensating


#### Special Models

CAA: Air/Oil return without return spring. Use only with external air/oil tank.

CNA: Self-Contained without return spring

CSA: Air/Oil return with return spring. Use only with external air/oil tank.

### CA2-S 2" Bore Foot Mount

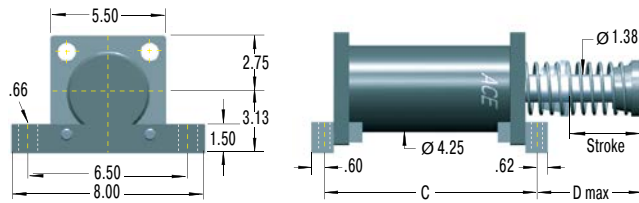

### Ordering Example

Self-Compensating CA2x4F-3  
 Bore Size Ø 2"  
 Stroke Length 4" (102 mm)  
 Front Flange Mounting  
 Effective Weight Range Version

The calculation and selection of the most suitable damper should be carried out or be approved by ACE.

### Dimensions

TYPES	Stroke inch	A max. inch	B max. inch	C inch	D max. inch	E inch
CA2X2	2.00	12.37	4.37	9.28	3.74	2.73
CA2X4	4.00	16.37	6.31	11.28	5.74	2.73
CA2X6	6.00	20.37	8.37	13.28	7.74	2.73
CA2X8	8.00	25.37	11.37	15.28	10.74	3.63
CA2X10	10.00	29.37	13.37	17.28	12.74	4.25

### Performance

TYPES	Max. Energy Capacity			Effective Weight			Return Force min. lbs	Return Force max. lbs	Return Time s	Side Load Angle max. °	Weight lbs
	<sup>1</sup> E <sub>3</sub> in-lbs/cycle	<sup>2</sup> E <sub>4</sub> in-lbs/h	<sup>2</sup> E <sub>4</sub> with Air/Oil Tank in-lbs/h	<sup>3</sup> We min. lbs	<sup>3</sup> We max. lbs	Hardness					
CA2X2-1	32,000	9,600,000	12,000,000	1,600	4,800	-1	48	63	0.25	3	28.2
CA2X2-2	32,000	9,600,000	12,000,000	4,000	12,000	-2	48	63	0.25	3	28.2
CA2X2-3	32,000	9,600,000	12,000,000	10,000	30,000	-3	48	63	0.25	3	28.2
CA2X2-4	32,000	9,600,000	12,000,000	25,000	75,000	-4	48	63	0.25	3	28.2
CA2X4-1	64,000	12,000,000	15,000,000	3,200	9,600	-1	34	63	0.50	3	32.6
CA2X4-2	64,000	12,000,000	15,000,000	8,000	24,000	-2	34	63	0.50	3	32.6
CA2X4-3	64,000	12,000,000	15,000,000	20,000	80,000	-3	34	63	0.50	3	32.6
CA2X4-4	64,000	12,000,000	15,000,000	50,000	150,000	-4	34	63	0.50	3	32.6
CA2X6-1	96,000	14,400,000	18,000,000	4,800	14,400	-1	34	90	0.60	3	37.3
CA2X6-2	96,000	14,400,000	18,000,000	12,000	36,000	-2	34	90	0.60	3	37.3
CA2X6-3	96,000	14,400,000	18,000,000	30,000	90,000	-3	34	90	0.60	3	37.3
CA2X6-4	96,000	14,400,000	18,000,000	75,000	225,000	-4	34	90	0.60	3	37.3
CA2X8-1	128,000	16,800,000	21,000,000	6,400	19,200	-1	51	144	0.70	3	42.6
CA2X8-2	128,000	16,800,000	21,000,000	16,000	48,000	-2	51	144	0.70	3	42.6
CA2X8-3	128,000	16,800,000	21,000,000	40,000	120,000	-3	51	144	0.70	3	42.6
CA2X8-4	128,000	16,800,000	21,000,000	100,000	300,000	-4	51	144	0.70	3	42.6
CA2X10-1	160,000	19,200,000	24,000,000	8,000	24,000	-1	35	101	0.80	3	50.3
CA2X10-2	160,000	19,200,000	24,000,000	20,000	60,000	-2	35	101	0.80	3	50.3
CA2X10-3	160,000	19,200,000	24,000,000	50,000	150,000	-3	35	101	0.80	3	50.3
CA2X10-4	160,000	19,200,000	24,000,000	125,000	375,000	-4	35	101	0.80	3	50.3


<sup>1</sup> For emergency use only applications it is sometimes possible to exceed the above ratings. Please consult ACE for further details.

<sup>2</sup> Figures for oil recirculation systems on request.


<sup>3</sup> The effective weight range limits can be raised or lowered to special order.

Self-Compensating


CA3-F Front Flange

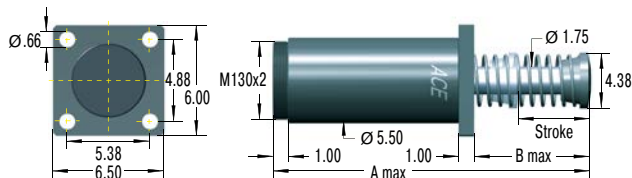


CA3-R Rear Flange

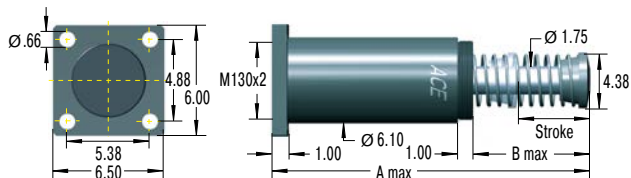

CA3-C Clevis Mount

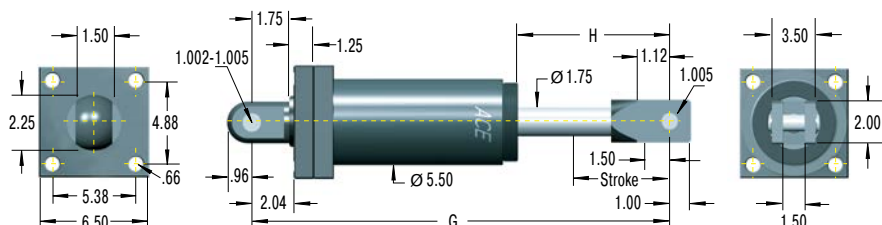

CA3-S Foot Mount

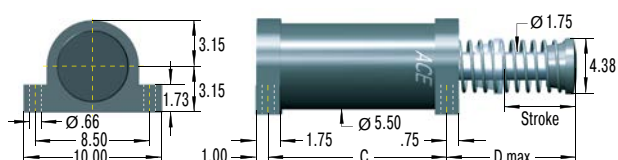

The calculation and selection of the most suitable damper should be carried out or be approved by ACE.

Model Type Prefix

Standard Models

CA: Self-contained with return spring, self-compensating

Special Models

CAA: Air/Oil return without return spring. Use only with external air/oil tank.

CNA: Self-Contained without return spring

CSA: Air/Oil return with return spring. Use only with external air/oil tank.

Ordering Example

Self-Compensating \_\_\_\_\_  
 Bore Size Ø 3" \_\_\_\_\_  
 Stroke Length 5" = 127 mm \_\_\_\_\_  
 Effective Weight Range Version \_\_\_\_\_  
 Front Flange Mounting \_\_\_\_\_

CA3x5-3F

Dimensions

TYPES	Stroke inch	A max. inch	B max. inch	C inch	D max. inch
CA3X5	5.00	19.31	8.31	9.95	8.81
CA3X8	8.00	25.31	11.31	12.95	11.81
CA3X12	12.00	35.09	17.09	16.95	17.59



Performance

TYPES	Max. Energy Capacity			Effective Weight			Return Force min. lbs	Return Force max. lbs	Return Time s	Side Load Angle max. °	Weight lbs
	<sup>1</sup> E <sub>3</sub> in-lbs/cycle	<sup>2</sup> E <sub>4</sub> in-lbs/h	<sup>2</sup> E <sub>4</sub> with Air/Oil Tank in-lbs/h	<sup>3</sup> We min. lbs	<sup>3</sup> We max. lbs	Hardness					
CA3X5-1	125,000	20,000,000	25,000,000	6,400	19,200	-1	59	156	0.6	3	63.7
CA3X5-2	125,000	20,000,000	25,000,000	16,000	48,000	-2	59	156	0.6	3	63.7
CA3X5-3	125,000	20,000,000	25,000,000	40,000	120,000	-3	59	156	0.6	3	63.7
CA3X5-4	125,000	20,000,000	25,000,000	100,000	300,000	-4	59	156	0.6	3	63.7
CA3X8-1	200,000	32,000,000	40,000,000	10,240	30,720	-1	62	162	0.8	3	73.6
CA3X8-2	200,000	32,000,000	40,000,000	25,600	76,800	-2	62	162	0.8	3	73.6
CA3X8-3	200,000	32,000,000	40,000,000	64,000	192,000	-3	62	162	0.8	3	73.6
CA3X8-4	200,000	32,000,000	40,000,000	160,000	480,000	-4	62	162	0.8	3	73.6
CA3X12-1	300,000	48,000,000	60,000,000	15,360	46,080	-1	60	160	1.2	3	89.5
CA3X12-2	300,000	48,000,000	60,000,000	38,400	15,200	-2	60	160	1.2	3	89.5
CA3X12-3	300,000	48,000,000	60,000,000	96,000	288,000	-3	60	160	1.2	3	89.5
CA3X12-4	300,000	48,000,000	60,000,000	240,000	720,000	-4	60	160	1.2	3	89.5


<sup>1</sup> For emergency use only applications it is sometimes possible to exceed the above ratings. Please consult ACE for further details.

<sup>2</sup> Figures for oil recirculation systems on request.


<sup>3</sup> The effective weight range limits can be raised or lowered to special order.




### CA4-F Front Flange

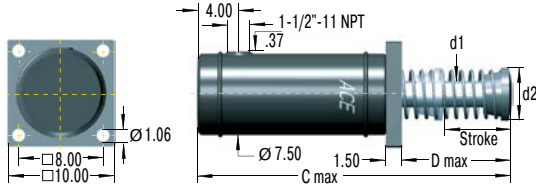


### CA4-R Rear Flange

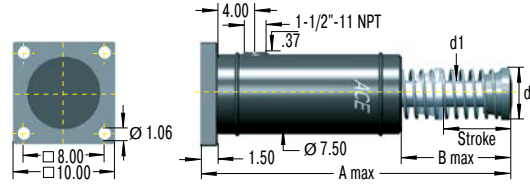


### CA4-FRP 6 Tapped Holes Primary Mounting

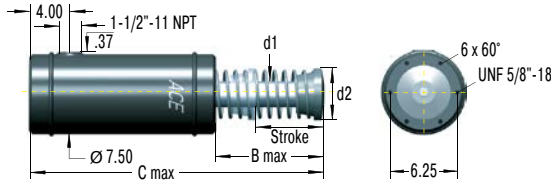

### CA4-C Clevis Mount

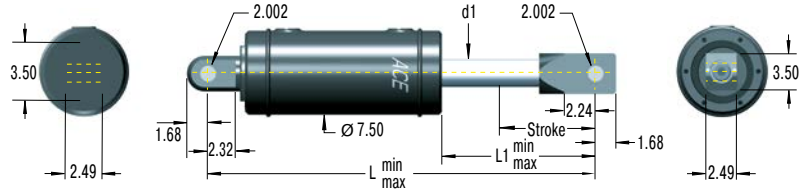

### CA4-S Foot Mount

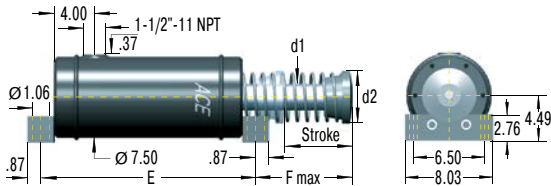

The calculation and selection of the most suitable damper should be carried out or be approved by ACE.

### Model Type Prefix

#### Standard Models

CA: Self-contained with return spring, self-compensating


#### Special Models

CAA: Air/Oil return without return spring. Use only with external air/oil tank.

CNA: Self-Contained without return spring

CSA: Air/Oil return with return spring. Use only with external air/oil tank.

### Ordering Example

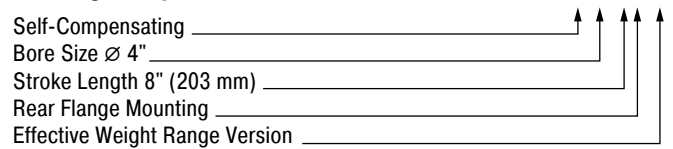

### Dimensions

TYPES	Stroke inch	A max. inch	B max. inch	C max. inch	D max. inch	d1 inch	d2 inch	E inch	F inch
CA4X6	6.00	28.21	10.96	26.71	9.46	2.12	4.50	17.50	10.09
CA4X8	8.00	32.21	12.96	30.71	11.46	2.12	4.50	19.50	12.09
CA4X16	16.00	51.21	23.96	49.71	22.46	2.50	5.00	27.50	23.09

### Performance

TYPES	Max. Energy Capacity				Effective Weight			Return Force min. lbs	Return Force max. lbs	Return Time s	Weight lbs
	<sup>1</sup> E <sub>3</sub> in-lbs/cycle	E <sub>4</sub> in-lbs/h	E <sub>4</sub> with Air/Oil Tank in-lbs/h	E <sub>4</sub> with Oil Recirculation in-lbs/h	<sup>2</sup> We min. lbs	<sup>2</sup> We max. lbs	Hardness				
CA4X6-3	420,000	27,000,000	45,000,000	58,400,000	8,000	19,000	-3	108	222	1.8	132.3
CA4X6-5	420,000	27,000,000	45,000,000	58,400,000	19,000	41,000	-5	108	222	1.8	132.3
CA4X6-7	420,000	27,000,000	45,000,000	58,400,000	41,000	94,000	-7	108	222	1.8	132.3
CA4X8-3	560,000	30,000,000	50,000,000	64,600,000	11,000	25,000	-3	71	222	2.3	149.9
CA4X8-5	560,000	30,000,000	50,000,000	64,600,000	25,000	55,000	-5	71	222	2.3	149.9
CA4X8-7	560,000	30,000,000	50,000,000	64,600,000	55,000	125,000	-7	71	222	2.3	149.9
CA4X16-3	1,120,000	50,000,000	85,000,000	109,800,000	22,000	50,000	-3	71	222	ask	321.9
CA4X16-5	1,120,000	50,000,000	85,000,000	109,800,000	50,000	110,000	-5	71	222	ask	321.9
CA4X16-7	1,120,000	50,000,000	85,000,000	109,800,000	110,000	250,000	-7	71	222	ask	321.9

<sup>1</sup> For emergency use only applications it is sometimes possible to exceed the above ratings. Please consult ACE for further details.

<sup>2</sup> The effective weight range limits can be raised or lowered to special order.

## A1 1/2 to A3

### Deceleration of heavy loads and progressive adjustment

#### Adjustable


**Energy capacity 21,000 in-lbs/Cycle to 390,000 in-lbs/Cycle**

**Stroke 2.00 in to 12.00 in**

Strong and adjustable: Also in ACE's product range of units are adjustable heavy duty industrial shock absorbers. The models from the A1 1/2 to A3 range, which weigh between 16.6 lbs and 105.8 lbs (7.55 and 48 kg), are extremely robust, ready-to-install hydraulic machine components with impressively high energy absorption levels and a wide range of damping rates.

Their special aspect is the flexibility, as all the absorbers can be adjusted using a socket on the absorber base and be perfectly adapted to the application. The A models cover a range of effective weights from 0.66 lbs to 449,743 lbs. (0.3 to 204,000 kg) and can absorb up to 389,433 in-lbs. (44,000 Nm) energy.

These heavy duty, adjustable ACE industrial shock absorbers are the first choice in heavy duty applications and generally in heavy industrial machining design when the usage data has not been exactly determined.

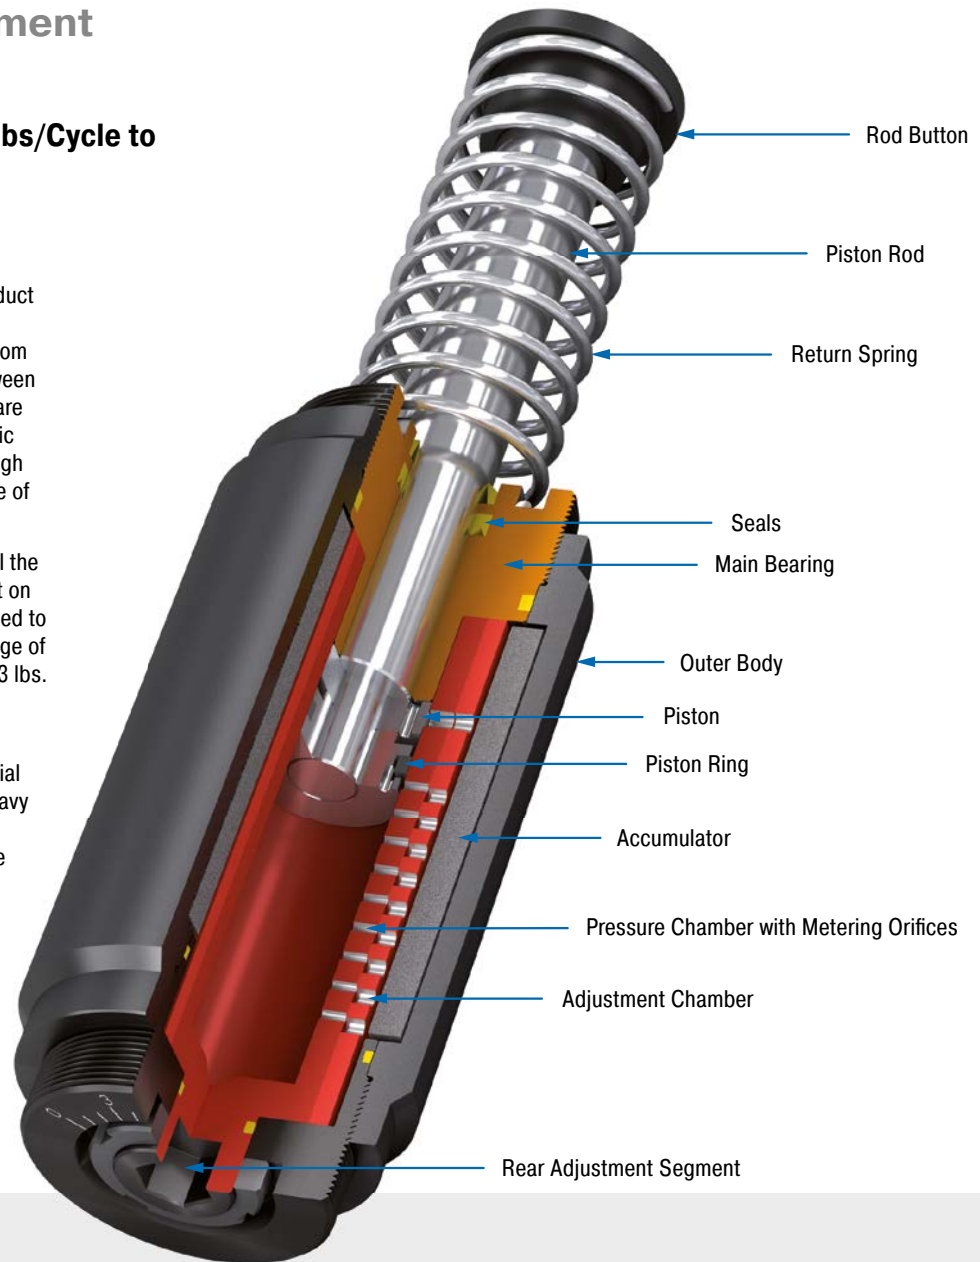

#### Technical Data

**Energy capacity:** 21,000 in-lbs/Cycle to 390,000 in-lbs/Cycle

**Impact velocity range:** 0.5 ft/sec to 15 ft/sec. Other speeds on request.

**Operating temperature range:** 10 °F to 150 °F. Other temperatures on request.

**Mounting:** In any position

**Positive stop:** External positive stops 0.10" to 0.12" before the end of stroke provided by the customer.

**Adjustment:** Hard impact at the start of stroke, adjust the ring towards 9. Hard impact at the end of stroke, adjust the ring towards 0.

**Material:** Outer body: Steel corrosion-resistant coating; Piston rod: Hard chrome plated steel; Rod end button: Hardened steel and corrosion-resistant coating; Return spring: Zinc plated steel

**Damping medium:** Automatic Transmission Fluid (ATF)

**Application field:** Portal systems, Machines and plants, Conveyor systems, Crane systems, Loading and lifting equipment, Impact panels, Heavy load applications, Swivel units, Shelf storage systems

**Note:** For emergency use only applications and for continuous use it is possible to exceed

the published max. capacity ratings. In this case, please consult ACE.

**Safety information:** External materials in the surrounding area can attack the seal components and lead to a shorter service life. Please contact ACE for appropriate solution suggestions. Do not paint the shock absorbers due to heat emission.

**On request:** Special oils, nickel-plated, increased corrosion protection or other special options are available on request.




### A1 1/2-F Front Flange



### A1 1/2-R Rear Flange



### A1 1/2-C Clevis Mount

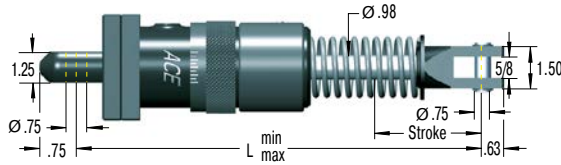

### A1 1/2-S Foot Mount



The calculation and selection of the most suitable damper should be carried out or be approved by ACE.

### Model Type Prefix

#### Standard Models

A: Self-contained with return spring, adjustable

#### Special Models

AA: Air/Oil return without return spring. Use only with external air/oil tank.

NA: Self-contained without return spring

SA: Air/Oil return with return spring. Use only with external air/oil tank.

### Ordering Example

Adjustable A1 1/2x2R  
 Bore Size  $\varnothing$  1 1/2"  
 Stroke Length 2" (50.8 mm)  
 Rear Flange Mounting

### Dimensions

TYPES	Stroke inch	L min. inch	L max. inch	L1 inch	L2 inch	L3 inch	L4 inch
A11/2X2	2.00	10.94	12.94	7.69	2.13	-	-
A11/2X31/2	3.50	12.46	15.97	9.19	2.13	6.69	2.31
A11/2X5	5.00	13.97	18.97	10.69	2.13	8.19	2.31
A11/2X61/2	6.50	16.22	22.72	12.94	2.88	9.69	3.06

### Performance

TYPES	Max. Energy Capacity			Effective Weight		Return Force min. lbs	Return Force max. lbs	Return Time s	Side Load Angle max. °	Weight lbs
	<sup>1</sup> E <sub>3</sub> in-lbs/cycle	<sup>2</sup> E <sub>4</sub> in-lbs/h	<sup>2</sup> E <sub>4</sub> with Air/Oil Tank in-lbs/h	<sup>3</sup> We min. lbs	<sup>3</sup> We max. lbs					
A11/2X2	21,000	3,200,000	4,000,000	430	70,000	34.9	47.6	0.10	5	16.6
A11/2X31/2	36,750	5,600,000	7,000,000	480	80,000	25.4	47.6	0.25	4	19.6
A11/2X5	52,500	8,000,000	10,000,000	500	90,000	20.7	52.5	0.40	3	20.6
A11/2X61/2	68,250	10,400,000	13,000,000	680	100,000	20.7	97.4	0.40	2	26.3


<sup>1</sup> For emergency use only applications it is sometimes possible to exceed the above ratings. Please consult ACE for further details.

<sup>2</sup> Figures for oil recirculation systems on request.


<sup>3</sup> The effective weight range limits can be raised or lowered to special order.

Adjustable


**A2-F Front Flange**

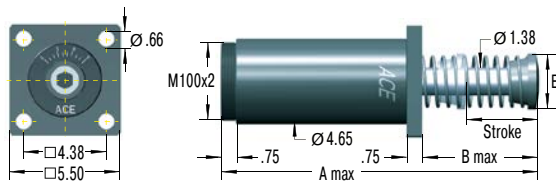


**A2-R Rear Flange**

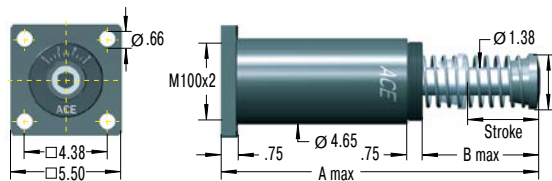

**A2-C Clevis Mount**

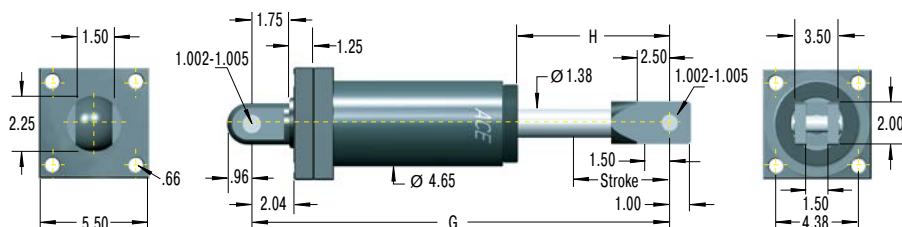

**A2-S 2" Bore Foot Mount**

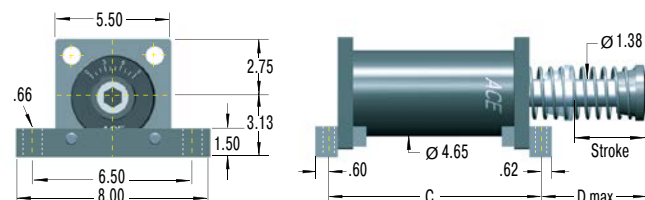

The calculation and selection of the most suitable damper should be carried out or be approved by ACE.

**Model Type Prefix**

**Standard Models**

A: Self-contained with return spring, adjustable


**Special Models**

AA: Air/Oil return without return spring. Use only with external air/oil tank.

NA: Self-contained without return spring

SA: Air/Oil return with return spring. Use only with external air/oil tank.

**Ordering Example**



**Dimensions**

TYPES	Stroke inch	A max. inch	B max. inch	C inch	D max. inch	E inch
A2X2	2.00	12.37	4.37	9.28	3.74	2.73
A2X4	4.00	16.37	6.31	11.28	5.74	2.73
A2X6	6.00	20.37	8.37	13.28	7.74	2.73
A2X8	8.00	25.37	11.37	15.28	10.74	3.63
A2X10	10.00	29.37	13.37	17.28	12.74	4.25

**Performance**

TYPES	Max. Energy Capacity			Effective Weight		Return Force min. lbs	Return Force max. lbs	Return Time s	Side Load Angle max. °	Weight lbs
	<sup>1</sup> E <sub>3</sub> in-lbs/cycle	<sup>2</sup> E <sub>4</sub> in-lbs/h	<sup>2</sup> E <sub>4</sub> with Air/Oil Tank in-lbs/h	<sup>3</sup> We min. lbs	<sup>3</sup> We max. lbs					
A2X2	32,000	9,600,000	12,000,000	560	170,000	48	63	0.25	3	31.5
A2X4	80,000	12,000,000	15,000,000	560	180,000	34	63	0.50	3	36.9
A2X6	120,000	14,400,000	18,000,000	570	190,000	34	90	0.60	3	42.6
A2X8	170,000	16,800,000	21,000,000	580	200,000	51	144	0.70	3	49.2
A2X10	210,000	19,200,000	24,000,000	720	250,000	35	101	0.80	3	57.8


<sup>1</sup> For emergency use only applications it is sometimes possible to exceed the above ratings. Please consult ACE for further details.

<sup>2</sup> Figures for oil recirculation systems on request.


<sup>3</sup> The effective weight range limits can be raised or lowered to special order.




### A3-F Front Flange

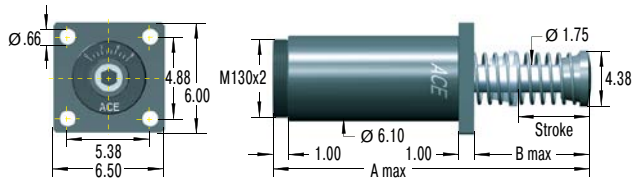


### A3-R Rear Flange

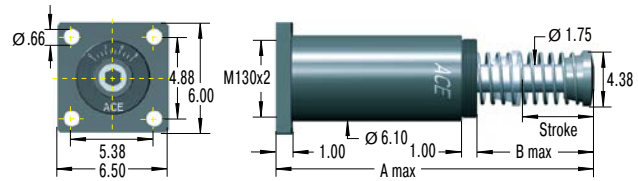

### A3-C Clevis Mount

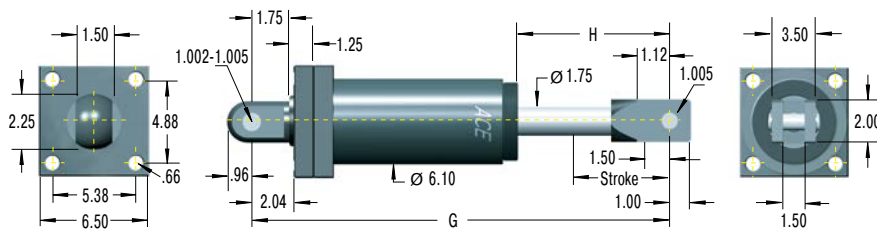

### A3-S Foot Mount

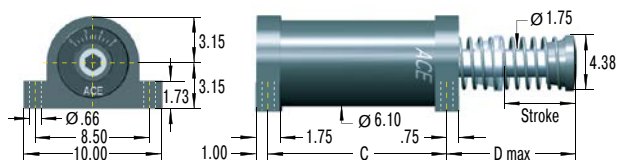

The calculation and selection of the most suitable damper should be carried out or be approved by ACE.

### Model Type Prefix

#### Standard Models

A: Self-contained with return spring, adjustable

#### Special Models

AA: Air/Oil return without return spring. Use only with external air/oil tank.

NA: Self-contained without return spring

SA: Air/Oil return with return spring. Use only with external air/oil tank.

### Ordering Example

Adjustable \_\_\_\_\_ **A3x8R**  
 Bore Size  $\varnothing$  3" \_\_\_\_\_  
 Stroke Length 8" (203 mm) \_\_\_\_\_  
 Rear Flange Mounting \_\_\_\_\_

### Dimensions

TYPES	Stroke inch	A max. inch	B max. inch	C inch	D max. inch
A3X5	5.00	19.31	8.31	9.95	8.81
A3X8	8.00	25.31	11.31	12.95	11.81
A3X12	12.00	35.09	17.09	16.95	17.59

### Performance

TYPES	Max. Energy Capacity			Effective Weight		Return Force min. lbs	Return Force max. lbs	Return Time s	Side Load Angle max. °	Weight lbs
	<sup>1</sup> E <sub>3</sub> in-lbs/cycle	<sup>2</sup> E <sub>4</sub> in-lbs/h	<sup>2</sup> E <sub>4</sub> with Air/Oil Tank in-lbs/h	<sup>3</sup> We min. lbs	<sup>3</sup> We max. lbs					
A3X5	140,000	20,000,000	25,000,000	1,050	340,000	59	156	0.6	3	72.1
A3X8	250,000	32,000,000	40,000,000	1,200	400,000	62	162	0.8	3	84.9
A3X12	390,000	48,000,000	60,000,000	1,350	450,000	60	160	1.2	3	105.8

<sup>1</sup> For emergency use only applications it is sometimes possible to exceed the above ratings. Please consult ACE for further details.

<sup>2</sup> Figures for oil recirculation systems on request.

<sup>3</sup> The effective weight range limits can be raised or lowered to special order.

## Air/Oil Tanks for industrial shock absorbers

**For high cycle rates and extreme temperatures with limited mounting space**

**Shock absorbers convert the introduced energy into heat. The more frequently a shock absorber is stressed per hour, the hotter the oil volume becomes over time. If the requirements placed on the impact frequency of a shock absorber are especially high, use of an air-oil tank is the solution.**


Thanks to increased oil volume and resulting heat dissipation, the upper limit of the possible hourly energy capacity of the shock absorber increases significantly.

In addition, the air-oil tank provides an opportunity for controlled piston return if no permanent return force through an integrated spring in the shock absorber is desired.

### Air/Oil Tanks AO

#### A01


Oil capacity 0.6 oz.  
Material: Aluminium caps

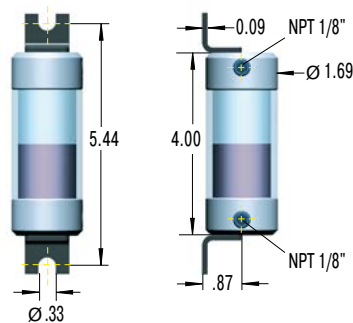

Detail drawings on request


#### A03

Oil capacity 12.5 oz.  
Material: Steel

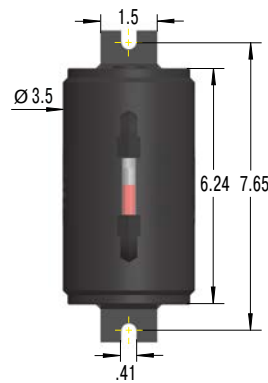

#### A06

Oil capacity 88 oz.  
Material: Steel

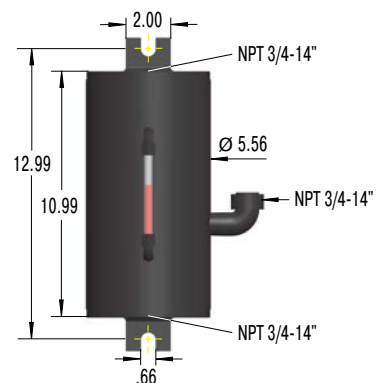

### Technical Data


**Operating pressure:** Max. 8 bar (116 psi)  
**Operating temperature range:** 176 °F  
**Damping medium:** ATF-Oil 42 cSt at 104 °F  
Mount air/oil tank higher than shock absorber.  
Bleed all air from system before operating.

**Safety instructions:** Exhaust tank before carrying out service. Check valve holds pressure!


**Suggested air/oil tanks in accordance with E<sub>4</sub> ratings**




### Connection Examples

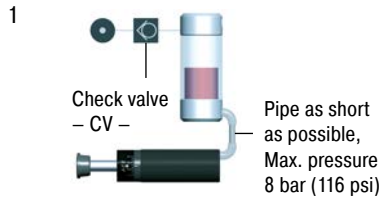

Piston rod returns immediately to extended position when load moves away. Operation without main air supply possible for short periods.




Return stroke may be sequenced by pneumatic valve at any desired time. No return force until valve energised.




Return force can be adjusted by pressure regulator. Ensure safe minimum pressure to return shock absorber.



Spring return with air/oil tank. No air supply connected. Note: Will extend return time.

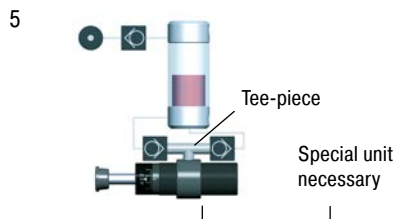

Oil recirculation circuit for extreme high cycle rates. Warm oil is positively circulated through air/oil tank for increased heat dissipation.

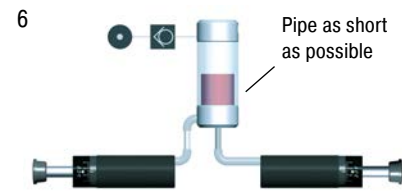

Connection of two shock absorbers to one air/oil tank is possible. Use next larger size tank. Combination with examples 2, 3 and 5 possible.

### Selection Chart Air/Oil Tanks

Shock Absorber Type	With Tank Example 1 to 4		With Recirc. Circuits Example 5 to 6		Min. Conn. Pipe Ø  inch	Thread Sizes for Connection to Air/Oil Tank	
	Tank	Check Valve	Tank	Check Valve		Thread Bottom	<sup>2</sup> Thread Side
MCA, MAA, MLA33...	AO1	CV1/8	AO3	CV1/4	0.16	<sup>1</sup> 1/8-27 NPTF inside	1/8-27 NPTF inside
MCA, MAA, MLA45...	AO1	CV1/8	AO3	CV3/8	0.24	1/8-27 NPTF inside	1/8-27 NPTF inside
MCA, MAA, MLA64...	AO3	CV1/4	AO6	CV3/4	0.31	1/4-18 NPTF inside	1/4-18 NPTF inside
CAA, AA2...	AO6	CV3/4	AO82	CV3/4	0.59	—	—
CAA, AA3...	AO6	CV3/4	AO82	CV3/4	0.75	—	—
CAA4...	AO82	CV3/4	AO82	CV3/4	1.50	—	—


AO82 and connection accessories: Details on request

<sup>1</sup> adapted

<sup>2</sup> on request (add suffix -PG/-P)

### Check Valves CV

Through an oil circuit fresh oil is drawn in from the industrial shock absorber and warm oil is pumped off (see example 5). To obtain this function, ACE offers suitable check valves of the CV series.

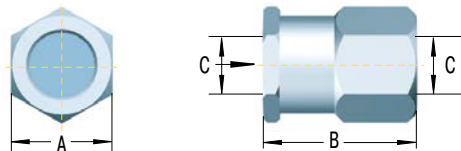

### Technical Data

**Operating pressure:** 20 bar (290 psi)

**Operating temperature range:** 203 °F

**Suitable for:** Oil, air, water

**Material:** Aluminium

### Check Valves – Dimensions

TYPES	A inch	B inch	C
CV1/8	0.75	0.94	1/8-27 NPT
CV1/4	1.14	1.30	1/4-18 NPT
CV3/8	1.14	1.30	3/8-18 NPT
CV1/2	1.61	1.57	1/2-14 NPT
CV3/4	1.89	2.32	3/4-14 NPT

## Profile Dampers

### The low cost alternative for continuous duty

The exceedingly successful TUBUS series from ACE is a perfect alternative, when masses don't need to be decelerated to an exact point. Available in more than 140 different versions, the profile dampers are used to slow down masses, particularly under extreme conditions.

They are also recommended for use if there is little installation space available. Manufactured in co-polyester elastomer, the highly resistant absorbers provide the best benefits in areas where other materials fail or where a high service life of up to 1 million cycles is required. They are affordable, compact, light and absorb energy with different damping characteristics depending on the design.

Competitive price/performance ratio

Reliable in extreme situations

Highly resistant material

Compact and lightweight design

Easy to mount

Long service life




## Physical Properties of TUBUS Profile Dampers

**ACE TUBUS profile dampers** are high performance damping elements made from a special Co-Polyester Elastomer. They have a high energy absorbing capacity compared with other materials.

The excellent damping characteristics are achieved as a result of the special elastomer material and the worldwide unique construction design. This enables us to change the characteristics of the elastomer material so that individual and distinct damping curves are possible.

TUBUS dampers offer a considerable performance advantage when compared to other materials such as rubber, urethanes (PUR) and steel springs.

**An advantage over other damping elements is TUBUS' operating life expectancy – up to twenty times longer than with urethane dampers, up to ten times longer than with rubber dampers and up to five times longer than with steel spring dampers.**

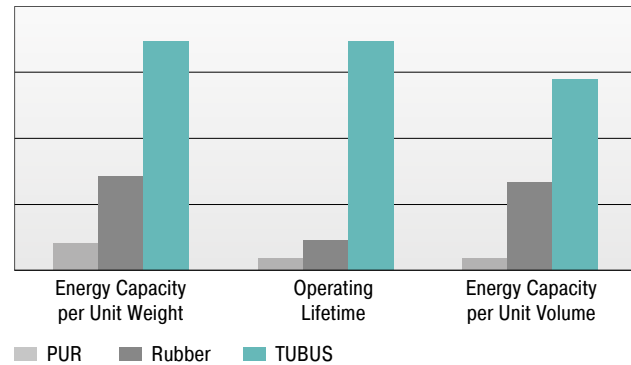

## Comparison of Damping Characteristics

The innovative TUBUS dampers absorb energy while exhibiting the following damping characteristics:

### Product family TA

Degressive characteristic with max. energy absorption with min. stroke.

Energy absorption: 58 % to 73 %

### Product family TS

Almost linear characteristic with low reaction force over a short operating stroke.

Energy absorption: 35 % to 64 %

### Product family TR/TR-L/TR-H

Progressive characteristic with gradually increasing reaction force over a long stroke.

Energy absorption TR: 25 % to 45 %


Energy absorption TR-L: 26 % to 41 %

Energy absorption TR-H: 39 % to 62 %

### Product family TR-HD

Progressive characteristic with high energy absorption with a short stroke.

Energy absorption: 43 % to 72 %

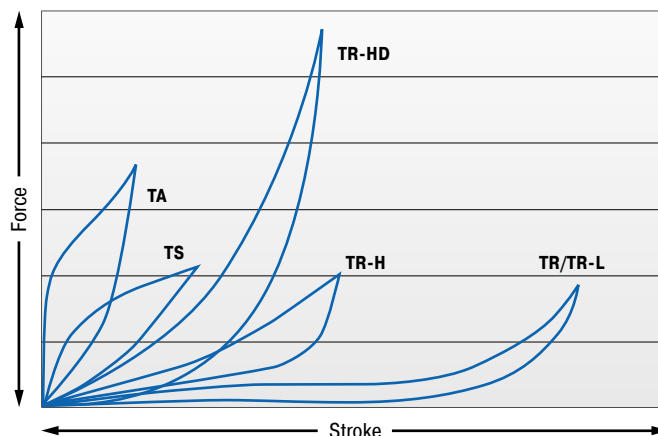

Characteristics of dynamic energy absorption for impact velocity over 1.64 ft/s.

or impact velocities under 1.64 ft/s, please request a static characteristic curve.

Issue 04.2018 – Specifications subject to change



**TUBUS TA, TS, TR, TR-H, TR-HD**

TYPES	Max. Energy Capacity		Stroke max. inch	Page
	<sup>1</sup> E <sub>3</sub> in-lbs/cycle	Emergency Stop E <sub>3</sub> in-lbs/cycle		
TA12-5	17.7	26.6	0.20	117
TA17-7	53.1	79.7	0.28	117
TA21-9	88.5	142	0.35	117
TA22-10	102	186	0.39	117
TA28-12	257	407	0.47	117
TA34-14	425	770	0.55	117
TA37-16	575	991	0.63	117
TA40-16	726	1,151	0.63	117
TA43-18	991	1,460	0.71	117
TA47-20	1,239	1,531	0.79	117
TA50-22	1,505	1,974	0.87	117
TA54-22	1,779	2,956	0.87	117
TA57-24	2,142	2,673	0.94	117
TA62-25	2,691	3,195	0.98	117
TA65-27	3,310	4,142	1.06	117
TA70-29	3,726	4,638	1.14	117
TA72-31	4,266	4,948	1.22	117
TA80-32	5,045	7,355	1.26	117
TA82-35	6,045	8,152	1.38	117
TA85-36	7,054	9,231	1.42	117
TA90-38	8,267	11,055	1.50	117
TA98-40	10,152	13,763	1.57	117
TA116-48	17,825	26,119	1.89	117
TS14-7	17.7	26.6	0.28	119
TS18-9	35.4	53.1	0.35	119
TS20-10	53.1	62.0	0.39	119
TS26-15	102	133	0.59	119
TS32-16	204	230	0.63	119
TS35-19	266	319	0.75	119
TS40-19	301	372	0.75	119
TS41-21	425	558	0.83	119
TS44-23	558	637	0.91	119
TS48-25	717	805	0.98	119
TS51-27	814	1,009	1.06	119
TS54-29	1,080	1,398	1.14	119
TS58-30	1,319	1,363	1.18	119
TS61-32	1,443	1,496	1.26	119
TS64-34	1,841	2,248	1.34	119
TS68-36	2,009	2,407	1.42	119
TS75-39	2,576	3,611	1.54	119
TS78-40	3,115	4,062	1.57	119
TS82-44	3,708	5,487	1.73	119
TS84-43	4,204	5,620	1.69	119
TS90-47	5,133	6,886	1.85	119
TS107-56	7,983	8,550	2.20	119
TR29-17	10.6	15.9	0.67	121
TR37-22	20.4	47.8	0.87	121
TR43-25	31.0	71.7	0.98	121
TR50-35	51.3	73.4	1.38	121
TR63-43	106	150	1.69	121
TR67-40	204	292	1.57	121
TR76-46	305	381	1.81	121
TR83-50	398	655	1.97	121
TR85-50	602	814	1.97	121
TR93-57	814	1,080	2.24	121
TR100-60	1,018	1,292	2.36	121
TR30-15H	23.9	50.5	0.59	123
TR39-19H	53.1	159	0.75	123
TR45-23H	77.0	212	0.91	123
TR52-32H	104	177	1.26	123
TR64-41H	221	407	1.61	123
TR68-37H	589	867	1.46	123
TR79-42H	721	938	1.65	123
TR86-45H	1,097	1,823	1.77	123
TR87-46H	1,398	2,310	1.81	123
TR95-50H	2,018	3,027	1.97	123
TR102-56H	2,567	3,779	2.20	123
TR42-14HD	3,585	5,018	0.58	127
TR47-12HD	7,585	10,621	0.48	127
TR47-17HD	7,523	10,532	0.67	127
TR52-14HD	14,462	20,250	0.47	127
TR57-21HD	10,568	14,798	0.86	127

**TUBUS TA, TS, TR, TR-H, TR-HD**

TYPES	Max. Energy Capacity		Stroke max. inch	Page
	<sup>1</sup> E <sub>3</sub> in-lbs/cycle	Emergency Stop E <sub>3</sub> in-lbs/cycle		
TR62-15HD	15,843	22,180	0.62	127
TR62-19HD	26,021	36,430	0.66	127
TR63-24HD	18,241	25,534	0.97	127
TR72-26HD	15,046	21,065	1.04	127
TR79-20HD	24,729	34,624	0.82	127
TR79-31HD	26,331	36,863	1.17	127
TR85-33HD	22,357	31,296	1.26	127
TR89-21HD	39,280	54,990	0.85	127
TR90-37HD	33,456	46,838	1.48	127
TR93-24HD	30,278	42,386	0.96	127
TR97-31HD	68,487	95,880	1.00	127
TR97-35HD	24,968	34,952	1.50	127
TR102-44HD	41,572	58,202	1.74	127
TR105-28HD	49,927	69,894	1.02	127
TR117-30HD	74,851	104,793	1.09	127

<sup>1</sup> Max. energy capacity per cycle for continuous use.

**TUBUS TR-L**

TYPES	Max. Energy Capacity		Stroke max. inch	Page
	<sup>1</sup> E <sub>3</sub> in-lbs/cycle	Emergency Stop E <sub>3</sub> in-lbs/cycle		
TR29-17L	63.7	96	0.67	125
TR43-25L	124	289	0.98	125
TR63-43L	194	283	1.69	125
TR66-40L-1	903	1,266	1.57	125
TR66-40L-2	1,806	2,531	1.57	125
TR66-40L-3	2,708	3,788	1.57	125
TR66-40L-4	3,611	5,054	1.57	125
TR66-40L-5	4,514	6,319	1.57	125
TR76-45L-1	1,283	1,797	1.77	125
TR76-45L-2	2,567	3,593	1.77	125
TR76-45L-3	3,850	5,390	1.77	125
TR76-45L-4	5,133	7,187	1.77	125
TR76-45L-5	6,417	8,984	1.77	125
TR83-48L-1	1,593	2,230	1.89	125
TR83-48L-2	3,186	4,461	1.89	125
TR83-48L-3	4,779	6,691	1.89	125
TR83-48L-4	6,373	8,922	1.89	125
TR83-48L-5	7,966	11,152	1.89	125
TR99-60L-1	2,390	3,346	2.36	125
TR99-60L-2	4,779	6,691	2.36	125
TR99-60L-3	7,169	10,037	2.36	125
TR99-60L-4	9,559	13,382	2.36	125
TR99-60L-5	11,949	16,728	2.36	125
TR99-60L-6	14,338	20,073	2.36	125
TR99-60L-7	16,728	23,419	2.36	125
TR143-86L-1	5,310	7,435	3.39	125
TR143-86L-2	10,621	14,869	3.39	125
TR143-86L-3	15,931	22,304	3.39	125
TR143-86L-4	21,242	29,738	3.39	125
TR143-86L-5	26,552	37,173	3.39	125
TR143-86L-6	31,863	44,608	3.39	125
TR143-86L-7	37,173	52,042	3.39	125
TR188-108L-1	9,736	13,630	4.25	125
TR188-108L-2	19,472	27,260	4.25	125
TR188-108L-3	29,207	40,890	4.25	125
TR188-108L-4	38,943	54,521	4.25	125
TR188-108L-5	48,679	68,151	4.25	125
TR188-108L-6	58,415	81,781	4.25	125
TR188-108L-7	68,151	95,411	4.25	125

<sup>1</sup> Max. energy capacity per cycle for continuous use.

## Profile Dampers



### TUBUS TA

Axial Damping

**Compact size and strong force absorption**

Linear slides, Pneumatic cylinders, Handling modules, Machines and plants

Page 116



### TUBUS TS

Axial Soft Damping

**Compact size and smooth deceleration**

Linear slides, Pneumatic cylinders, Handling modules, Machines and plants

Page 118



### TUBUS TR

Radial Damping

**Compact size and soft deceleration**

Furniture industry, Sports equipment, Linear slides, Pneumatic cylinders

Page 120



### TUBUS TR-H

Radial Damping, Hard Version

**Compact size with soft deceleration and high energy absorption**

Furniture industry, Sports equipment, Linear slides, Pneumatic cylinders

Page 122



### TUBUS TR-L

Radial Damping, Long Version

**Powerhouse in long body length**

Offshore industry, Agricultural machinery, Impact panels, Conveyor systems

Page 124



### TUBUS TR-HD

Radial Damping, Heavy Duty Version

**Compact powerhouse in solid material**

Offshore industry, Agricultural machinery, Impact panels, Conveyor systems

Page 126

## TUBUS TA

### Compact size and strong force absorption

#### Axial Damping

**Energy capacity 17.7 in-lbs/Cycle to 17,825 in-lbs/Cycle**

**Maximum stroke 0.20 in to 1.89 in**

Very efficient energy guzzlers: The TA profile dampers from the ACE TUBUS-Series are maintenance-free and ready to install. They're made of co-polyester elastomer; a material that only heats up slightly and ensures consistent damping. The TA models absorb most of the energy at the start of the stroke.

The TA family has been specially developed for maximum energy absorption within a range of 18 in-lbs to 26,119 in-lbs. (2 Nm to 2,951 Nm). These dampers have a minimum height is thanks to the space-saving shape, with  $\varnothing$  0.47" to  $\varnothing$  4.57" ( $\varnothing$  12 mm to  $\varnothing$  116 mm). The dampers can be very easily and quickly installed with the provided special screw.

These compact, cost-effective dampers are ideal as end position dampers in linear axes, in toolmaking and tool machines, in hydraulic and pneumatic equipment, handling equipment and other applications.



#### Technical Data

**Energy capacity:** 17.7 in-lbs/Cycle to 17,825 in-lbs/Cycle

**Energy absorption:** 58 % to 73 %

**Dynamic force range:** 196 lbs to 20,233 lbs

**Operating temperature range:** -40 °F to 194 °F

**Construction size:** 0.47 in to 4.57 in

**Mounting:** In any position

**Material hardness rating:** Shore 55D

**Material:** Profile body: Co-Polyester Elastomer

**Environment:** Resistant to microbes, seawater or chemical attack. Excellent UV and ozone resistance. Material does not absorb water or swell.

**Impact velocity range:** Max. 16.4 ft/sec

**Torque max.:**

M3: 0.74 ft-lbs

M4: 1.25 ft-lbs

M5: 1.70 ft-lbs

M6: 4.43 ft-lbs

M8: 14.75 ft-lbs

M12: 36.88 ft-lbs

M16: 88.51 ft-lbs


**Application field:** Linear slides, Pneumatic cylinders, Handling modules, Machines and plants, Swivel units, Electro-mechanical drives, Hydraulic devices, Conveyor systems, Crane systems

**Note:** Suitable for emergency stop applications and for continuous use. For applications with preloading and increased temperatures please consult ACE.

**Safety information:** Mounting screw should additionally be secured with Loctite.


**On request:** Special strokes, -characteristics, -spring rates, -sizes and -materials.

### TA

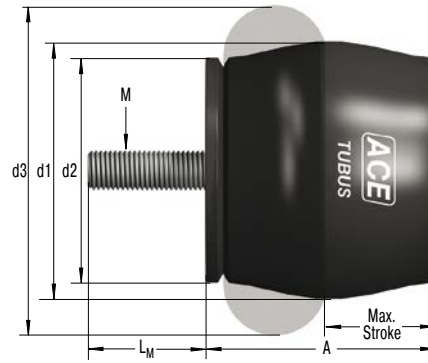


### Characteristics

**Type TA37-16**  
**Energy-Stroke Characteristic (dynamic)**  
 (with impact velocity over 1.64 ft/s)

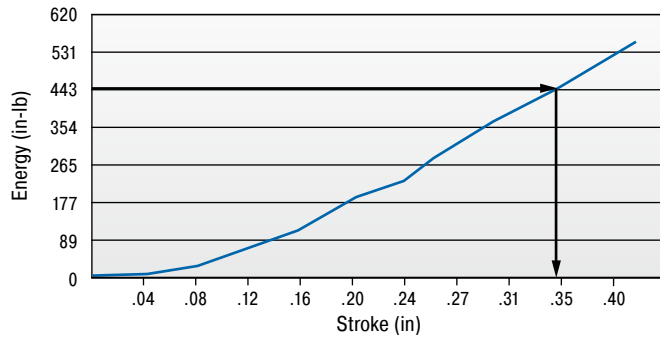

**Type TA37-16**  
**Force-Stroke Characteristic (dynamic)**  
 (with impact velocity over 1.64 ft/s)

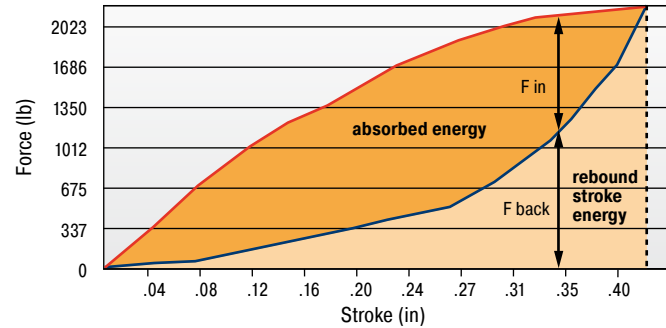

With the aid of the characteristic curves above you can estimate the proportion of the total energy that will be absorbed.  
 Example: With impact energy of 443 lbs the Energy-Stroke diagram shows that a stroke of about 0.35 in is needed.  
 On the Force-Stroke diagram you can estimate the proportion of absorbed energy to rebound energy at this stroke length.

**Dynamic ( $v > 1.64$  ft/s) and static ( $v \leq 1.64$  ft/s) characteristics of all types are available on request.**

**The calculation and selection of the most suitable damper should be carried out or be approved by ACE.**

#### Ordering Example

TUBUS Axial \_\_\_\_\_ **TA37-16**  
 Outer- $\varnothing$  1.46" (37 mm) \_\_\_\_\_  
 Stroke 0.63" (16 mm) \_\_\_\_\_

### Performance and Dimensions

TYPES	Emergency Stop		Stroke max. inch	A inch	d1 inch	d2 inch	d3 inch	L <sub>m</sub> inch	M	Weight lbs
	<sup>1</sup> E <sub>3</sub> in-lbs/cycle	E <sub>3</sub> in-lbs/cycle								
TA12-5	17.7	26.6	0.20	0.43	0.47	0.43	0.59	0.12	M3	0.003
TA17-7	53.1	79.7	0.28	0.63	0.67	0.59	0.87	0.16	M4	0.013
TA21-9	88.5	142	0.35	0.71	0.83	0.71	1.02	0.20	M5	0.038
TA22-10	102	186	0.39	0.75	0.87	0.75	1.06	0.24	M6	0.019
TA28-12	257	407	0.47	1.02	1.10	0.98	1.42	0.24	M6	0.035
TA34-14	425	770	0.55	1.18	1.34	1.18	1.69	0.24	M6	0.052
TA37-16	575	991	0.63	1.30	1.46	1.30	1.89	0.24	M6	0.067
TA40-16	726	1,151	0.63	1.38	1.57	1.34	1.97	0.31	M8	0.088
TA43-18	991	1,460	0.71	1.50	1.69	1.50	2.17	0.31	M8	0.113
TA47-20	1,239	1,531	0.79	1.61	1.85	1.61	2.36	0.47	M12	0.154
TA50-22	1,505	1,974	0.87	1.77	1.97	1.73	2.52	0.47	M12	0.187
TA54-22	1,779	2,956	0.87	1.85	2.13	1.85	2.68	0.47	M12	0.220
TA57-24	2,142	2,673	0.94	2.01	2.24	1.97	2.87	0.47	M12	0.256
TA62-25	2,691	3,195	0.98	2.13	2.44	2.09	3.07	0.47	M12	0.291
TA65-27	3,310	4,142	1.06	2.28	2.56	2.24	3.23	0.47	M12	0.338
TA70-29	3,726	4,638	1.14	2.40	2.76	2.36	3.39	0.47	M12	0.385
TA72-31	4,266	4,948	1.22	2.56	2.83	2.48	3.58	0.63	M16	0.566
TA80-32	5,045	7,355	1.26	2.72	3.15	2.72	3.94	0.63	M16	0.687
TA82-35	6,045	8,152	1.38	2.91	3.23	2.83	4.13	0.63	M16	0.773
TA85-36	7,054	9,231	1.42	2.99	3.35	2.95	4.33	0.63	M16	0.863
TA90-38	8,267	11,055	1.50	3.15	3.54	3.07	4.49	0.63	M16	0.912
TA98-40	10,152	13,763	1.57	3.39	3.86	3.35	4.84	0.63	M16	1.131
TA116-48	17,825	26,119	1.89	3.98	4.57	3.86	5.75	0.63	M16	1.770

<sup>1</sup> Max. energy capacity per cycle for continuous use.

## TUBUS TS

### Compact size and smooth deceleration

#### Axial Soft Damping

**Energy capacity 17.7 in-lbs/Cycle to 7,983 in-lbs/Cycle**

**Maximum stroke 0.28 in to 2.20 in**

Energy absorption in a compact and uniform way: The TS (TUBUS soft) profile dampers are also manufactured from co-polyester elastomer. Due to the almost linear damping characteristic curve, the maintenance-free, ready-to-install components softly absorb the energy with minimum stress on the machine. Consistent damping is helped by the low temperature increase of the material during operation.

The TS product family impresses with maximum energy absorption within a range of 17.7 in-lbs to 8,549 in-lbs (2 Nm to 966 Nm) within a minimum height. The space-saving design has been implemented from Ø 0.55" to Ø 4.21" (Ø 14 mm to Ø 107 mm). The special screw supplied is used to simply and quickly secure the profile dampers in place.

Suitable for emergency stop and permanent applications, the cost-effective, durable TUBUS TS can be used as end position dampers in linear axes, in tool making and tool machines and in hydraulic, pneumatic and handling equipment.



### Technical Data

**Energy capacity:** 17.7 in-lbs/Cycle to 7,983 in-lbs/Cycle

**Energy absorption:** 35 % to 64 %

**Dynamic force range:** 120 lbs to 5,283 lbs

**Operating temperature range:** -40 °F to 194 °F

**Construction size:** 0.55 in to 4.21 in

**Mounting:** In any position

**Material hardness rating:** Shore 40D

**Material:** Profile body: Co-Polyester Elastomer

**Environment:** Resistant to microbes, seawater or chemical attack. Excellent UV and ozone resistance. Material does not absorb water or swell.

**Impact velocity range:** Max. 16.4 ft/sec

**Torque max.:**

M4: 1.25 ft-lbs

M5: 1.70 ft-lbs

M6: 4.43 ft-lbs

M12: 36.88 ft-lbs

M16: 88.51 ft-lbs

**Application field:** Linear slides, Pneumatic cylinders, Handling modules, Machines and plants, Swivel units, Electro-mechanical drives, Crane systems, Conveyor systems


**Note:** Suitable for emergency stop applications and for continuous use. For applications with preloading and increased temperatures please consult ACE.

**Safety information:** Mounting screw should additionally be secured with Loctite.

**On request:** Special strokes, -characteristics, -spring rates, -sizes and -materials.




TS

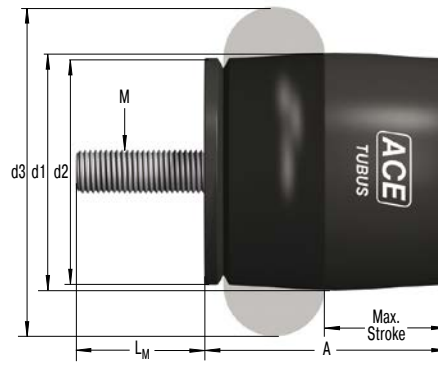

Characteristics


Type TS44-23

Energy-Stroke Characteristic (dynamic)  
(with impact velocity over 1.64 ft/s)

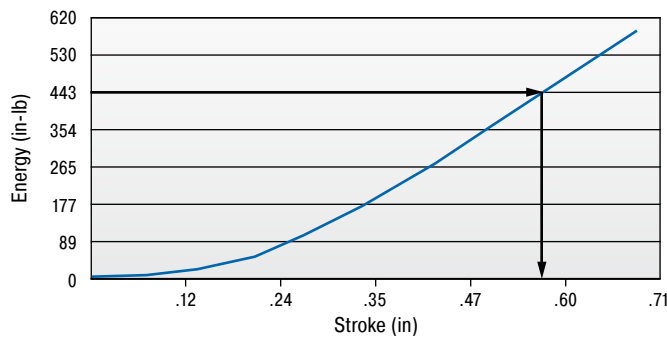

Type TS44-23

Force-Stroke Characteristic (dynamic)  
(with impact velocity over 1.64 ft/s)

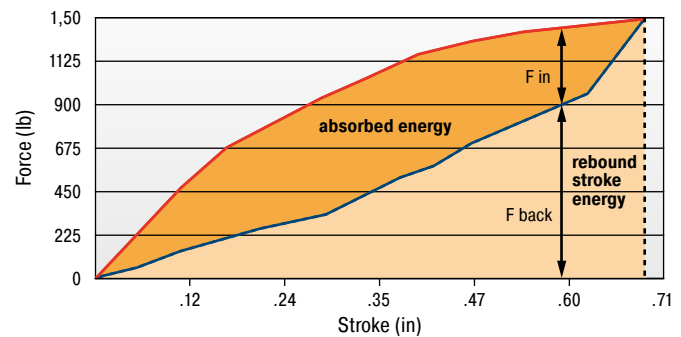

With the aid of the characteristic curves above you can estimate the proportion of the total energy that will be absorbed.  
Example: With impact energy of 443 lbs the Energy-Stroke diagram shows that a stroke of about 0.55 in is needed.  
On the Force-Stroke diagram you can estimate the proportion of absorbed energy to rebound energy at this stroke length.  
**Dynamic ( $v > 1.64$  ft/s) and static ( $v \leq 1.64$  ft/s) characteristics of all types are available on request.**

The calculation and selection of the most suitable damper should be carried out or be approved by ACE.

Ordering Example

TUBUS Axial Soft \_\_\_\_\_ **TS44-23**  
Outer- $\varnothing$  1.73" (44 mm) \_\_\_\_\_  
Stroke 0.91" (23 mm) \_\_\_\_\_

Performance and Dimensions

TYPES	Emergency Stop		Stroke max. inch	A inch	d1 inch	d2 inch	d3 inch	L <sub>m</sub> inch	M	Weight lbs
	<sup>1</sup> E <sub>3</sub> in-lbs/cycle	E <sub>3</sub> in-lbs/cycle								
TS14-7	17.7	26.6	0.28	0.59	0.55	0.51	0.75	0.16	M4	0.015
TS18-9	35.4	53.1	0.35	0.71	0.71	0.63	0.94	0.20	M5	0.017
TS20-10	53.1	62.0	0.39	0.83	0.79	0.75	1.06	0.24	M6	0.017
TS26-15	102	133	0.59	1.10	1.02	0.98	1.46	0.24	M6	0.032
TS32-16	204	230	0.63	1.26	1.26	1.18	1.73	0.24	M6	0.046
TS35-19	266	319	0.75	1.42	1.38	1.30	1.89	0.24	M6	0.062
TS40-19	301	372	0.75	1.50	1.57	1.34	2.01	0.24	M6	0.068
TS41-21	425	558	0.83	1.61	1.61	1.50	2.17	0.47	M12	0.132
TS44-23	558	637	0.91	1.77	1.73	1.57	2.36	0.47	M12	0.154
TS48-25	717	805	0.98	1.93	1.89	1.73	2.52	0.47	M12	0.176
TS51-27	814	1,009	1.06	2.05	2.01	1.85	2.72	0.47	M12	0.209
TS54-29	1,080	1,398	1.14	2.17	2.13	1.97	2.87	0.47	M12	0.231
TS58-30	1,319	1,363	1.18	2.32	2.28	2.09	3.07	0.47	M12	0.266
TS61-32	1,443	1,496	1.26	2.44	2.40	2.20	3.27	0.63	M16	0.448
TS64-34	1,841	2,248	1.34	2.60	2.52	2.36	3.43	0.63	M16	0.512
TS68-36	2,009	2,407	1.42	2.72	2.68	2.48	3.62	0.63	M16	0.546
TS75-39	2,576	3,611	1.54	2.95	2.95	2.72	3.98	0.63	M16	0.664
TS78-40	3,115	4,062	1.57	3.11	3.07	2.83	4.13	0.63	M16	0.732
TS82-44	3,708	5,487	1.73	3.31	3.23	2.95	4.33	0.63	M16	0.762
TS84-43	4,204	5,620	1.69	3.35	3.31	3.07	4.53	0.63	M16	0.886
TS90-47	5,133	6,886	1.85	3.62	3.54	3.31	4.88	0.63	M16	1.286
TS107-56	7,983	8,550	2.20	4.33	4.21	3.94	5.79	0.63	M16	1.616

<sup>1</sup> Max. energy capacity per cycle for continuous use.

# TUBUS TR

## Compact size and soft deceleration

### Radial Damping

**Energy capacity 10.6 in-lbs/Cycle to 1,018 in-lbs/Cycle**

**Maximum stroke 0.67 in to 2.36 in**

For long, soft braking action: The TUBUS TR models deliver linear damping forces. These maintenance-free, ready-to-install elements are made of co-polyester elastomer, which only heats up slightly during operation and therefore provides consistent damping.

The radial loading enables a very long and soft deceleration with progressive energy reduction at the end of the stroke. The TR product family has been specially designed for maximum stroke with a minimum height, producing energy absorption per stroke extending from 10.6 in-lbs to 1,292 in-lbs. (1.2 Nm to 146 Nm). The dampers are available in compact formats of  $\varnothing 1.14"$  to  $\varnothing 3.94"$  ( $\varnothing 29$  mm to  $\varnothing 100$  mm) and are supplied with a special screw for simple, quick assembly.

The TUBUS TR products are suitable as end position dampers in linear axes, in tool making and tool machines, in hydraulic and pneumatic equipment, handling equipment and other applications.



### Technical Data

**Energy capacity:** 10.6 in-lbs/Cycle to 1,018 in-lbs/Cycle

**Energy absorption:** 25 % to 45 %

**Dynamic force range:** 49 lbs to 1,686 lbs

**Operating temperature range:** -40 °F to 194 °F

**Construction size:** 1.14 in to 3.93 in

**Mounting:** In any position

**Material hardness rating:** Shore 40D

**Material:** Profile body: Co-Polyester Elastomer

**Environment:** Resistant to microbes, seawater or chemical attack. Excellent UV and ozone resistance. Material does not absorb water or swell.

**Impact velocity range:** Max. 16.4 ft/sec

**Torque max.:**

M5: 2.21 ft-lbs

M6: 4.43 ft-lbs

M8: 14.75 ft-lbs


**Application field:** Furniture industry, Sports equipment, Linear slides, Pneumatic cylinders, Handling modules, Machines and plants, Stacking units, Electro-mechanical drives, Conveyor systems, Dock constructions for shipbuilding

**Note:** Suitable for emergency stop applications and for continuous use. For applications with preloading and increased temperatures please consult ACE.

**Safety information:** Mounting screw should additionally be secured with Loctite.

**On request:** Special strokes, -characteristics, -spring rates, -sizes and -materials.


### TR

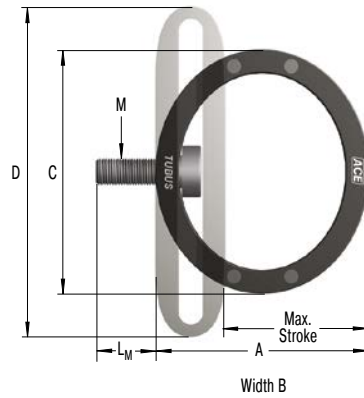

### Characteristics


#### Type TR93-57

**Energy-Stroke Characteristic (dynamic)**  
(with impact velocity over 1.64 ft/s)

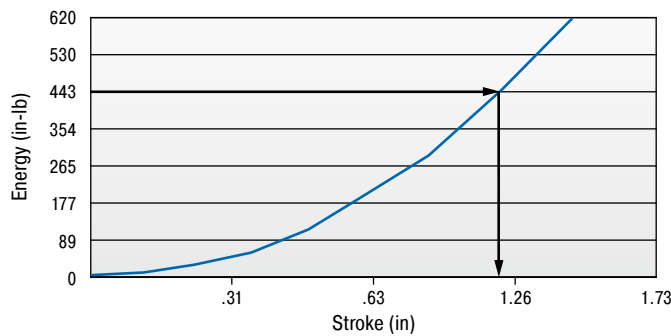

#### Type TR93-57

**Force-Stroke Characteristic (dynamic)**  
(with impact velocity over 1.64 ft/s)

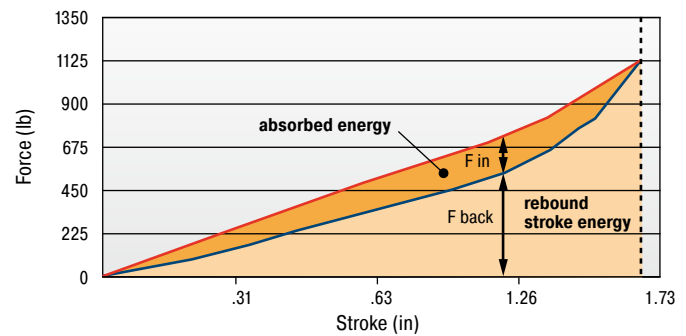

With the aid of the characteristic curves above you can estimate the proportion of the total energy that will be absorbed.

Example: With impact energy of 443 lbs the Energy-Stroke diagram shows that a stroke of about 1.22 in is needed.

On the Force-Stroke diagram you can estimate the proportion of absorbed energy to rebound energy at this stroke length.

**Dynamic ( $v > 1.64$  ft/s) and static ( $v \leq 1.64$  ft/s) characteristics of all types are available on request.**

The calculation and selection of the most suitable damper should be carried out or be approved by ACE.

#### Ordering Example

TUBUS Radial \_\_\_\_\_ **TR93-57**  
Outer- $\varnothing$  3.66" (93 mm) \_\_\_\_\_  
Stroke 2.24" (57 mm) \_\_\_\_\_

### Performance and Dimensions

TYPES	Emergency Stop		Stroke max. inch	A inch	B inch	C inch	D inch	L <sub>M</sub> inch	M	Weight lbs
	<sup>1</sup> E <sub>3</sub> in-lbs/cycle	E <sub>3</sub> in-lbs/cycle								
TR29-17	10.6	15.9	0.67	0.98	0.51	1.14	1.50	0.20	M5	0.015
TR37-22	20.4	47.8	0.87	1.26	0.75	1.46	1.97	0.20	M5	0.028
TR43-25	31.0	71.7	0.98	1.46	0.79	1.69	2.28	0.20	M5	0.038
TR50-35	51.3	73.4	1.38	1.73	1.34	1.97	2.68	0.20	M5	0.048
TR63-43	106	150	1.69	2.17	1.69	2.48	3.43	0.20	M5	0.112
TR67-40	204	292	1.57	2.32	1.81	2.64	3.46	0.20	M5	0.170
TR76-46	305	381	1.81	2.64	1.81	2.99	4.02	0.24	M6	0.230
TR83-50	398	655	1.97	2.87	2.01	3.27	4.29	0.24	M6	0.313
TR85-50	602	814	1.97	2.87	2.68	3.35	4.37	0.31	M8	0.455
TR93-57	814	1,080	2.24	3.27	3.27	3.66	4.88	0.31	M8	0.655
TR100-60	1,018	1,292	2.36	3.46	3.23	3.94	5.24	0.31	M8	0.679

<sup>1</sup> Max. energy capacity per cycle for continuous use.

## TUBUS TR-H

Compact size with soft deceleration and high energy absorption

### Radial Damping, Hard Version

**Energy capacity 23.9 in-lbs/Cycle to 2,567 in-lbs/Cycle**

**Maximum stroke 0.59 in to 2.20 in**

Harder mixture of materials for higher energy absorption: The maintenance-free and ready-to-install TR-H profile dampers, are stressed radially in the same way as the basic TR model. With almost the same dimensions, they also decelerate with a very long and soft action. The harder co-polyester elastomer mixture leads to significantly high energy absorption of 23.9 in-lbs to 3,779 in-lbs (2.7 Nm to 427 Nm) in these models. The supplied special screw makes them easy to mount.

The TR-H product family is space-saving with dimensions of  $\varnothing$  1.18" to  $\varnothing$  4.02" ( $\varnothing$  30 mm to  $\varnothing$  102 mm). It complements the TUBUS range between the progressive TR and almost linear TS models. Users are therefore provided with a full range of deceleration curves within the ACE TUBUS family.

The TUBUS TR-H products are suitable end position dampers in linear axes, in tool making and tool machines and in hydraulic, pneumatic and handling equipment as well as other applications.



### Technical Data

**Energy capacity:** 23.9 in-lbs/Cycle to 2,567 in-lbs/Cycle

**Energy absorption:** 39 % to 62 %

**Dynamic force range:** 124 lbs to 4,766 lbs

**Operating temperature range:** -40 °F to 194 °F

**Construction size:** 1.18 in to 4.01 in

**Mounting:** In any position

**Material hardness rating:** Shore 55D

**Material:** Profile body: Co-Polyester Elastomer

**Environment:** Resistant to microbes, seawater or chemical attack. Excellent UV and ozone resistance. Material does not absorb water or swell.

**Impact velocity range:** Max. 16.4 ft/sec

**Torque max.:**

M5: 2.21 ft-lbs

M6: 4.43 ft-lbs

M8: 14.75 ft-lbs


**Application field:** Furniture industry, Sports equipment, Linear slides, Pneumatic cylinders, Handling modules, Machines and plants, Stacking units, Electro-mechanical drives, Conveyor systems, Dock constructions for shipbuilding

**Note:** Suitable for emergency stop applications and for continuous use. For applications with preloading and increased temperatures please consult ACE.

**Safety information:** Mounting screw should additionally be secured with Loctite.


**On request:** Special strokes, -characteristics, -spring rates, -sizes and -materials.

### TR-H

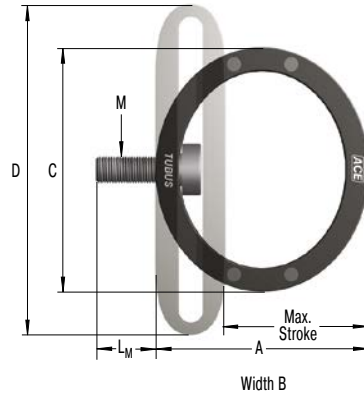


### Characteristics

**Type TR95-50H**  
**Energy-Stroke Characteristic (dynamic)**  
**(with impact velocity over 1.64 ft/s)**

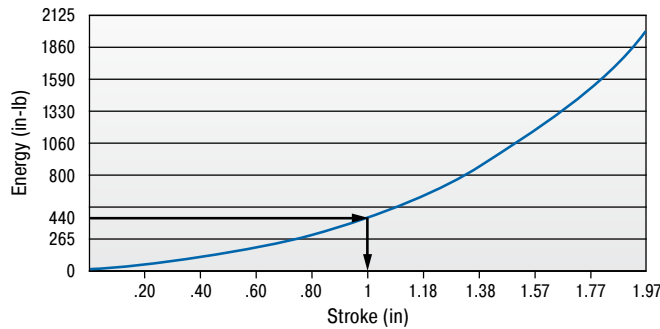

**Type TR95-50H**  
**Force-Stroke Characteristic (dynamic)**  
**(with impact velocity over 1.64 ft/s)**

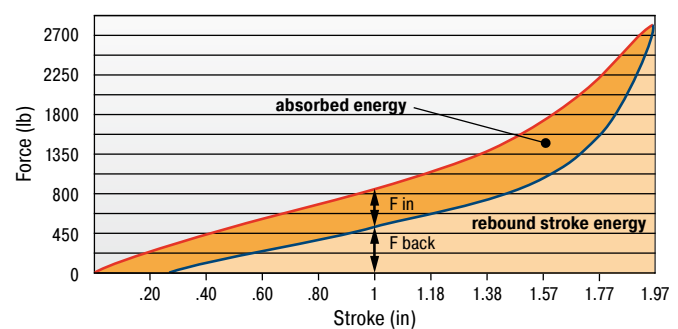

With the aid of the characteristic curves above you can estimate the proportion of the total energy that will be absorbed.  
 Example: With impact energy of 443 lbs the Energy-Stroke diagram shows that a stroke of about 0.98 in is needed.  
 On the Force-Stroke diagram you can estimate the proportion of absorbed energy to rebound energy at this stroke length.  
**Dynamic ( $v > 1.64$  ft/s) and static ( $v \leq 1.64$  ft/s) characteristics of all types are available on request.**

**The calculation and selection of the most suitable damper should be carried out or be approved by ACE.**

#### Ordering Example

TUBUS Radial \_\_\_\_\_ **TR95-50H**  
 Outer- $\varnothing$  3.74" (95 mm) \_\_\_\_\_  
 Stroke 1.97" (50 mm) \_\_\_\_\_  
 Hard Version \_\_\_\_\_

### Performance and Dimensions

TYPES	Emergency Stop		Stroke max. inch	A inch	B inch	C inch	D inch	L <sub>M</sub> inch	M	Weight lbs
	<sup>1</sup> E <sub>3</sub> in-lbs/cycle	E <sub>3</sub> in-lbs/cycle								
TR30-15H	23.9	50.5	0.59	0.91	0.51	1.18	1.50	0.20	M5	0.013
TR39-19H	53.1	159	0.75	1.18	0.75	1.54	1.97	0.20	M5	0.029
TR45-23H	77.0	212	0.91	1.42	0.79	1.77	2.28	0.20	M5	0.042
TR52-32H	104	177	1.26	1.65	1.34	2.05	2.68	0.20	M5	0.060
TR64-41H	221	407	1.61	2.09	1.69	2.52	3.43	0.20	M5	0.119
TR68-37H	589	867	1.46	2.20	1.81	2.68	3.46	0.20	M5	0.183
TR79-42H	721	938	1.65	2.52	1.81	3.11	4.02	0.24	M6	0.235
TR86-45H	1,097	1,823	1.77	2.72	2.01	3.39	4.29	0.24	M6	0.334
TR87-46H	1,398	2,310	1.81	2.68	2.64	3.39	4.37	0.31	M8	0.446
TR95-50H	2,018	3,027	1.97	3.03	3.23	3.74	4.88	0.31	M8	0.619
TR102-56H	2,567	3,779	2.20	3.31	3.19	4.02	5.24	0.31	M8	0.736

<sup>1</sup> Max. energy capacity per cycle for continuous use.

# TUBUS TR-L

## Powerhouse in long body length

### Radial Damping, Long Version


**Energy capacity 63.7 in-lbs/Cycle to 68,151 in-lbs/Cycle**

**Maximum stroke 0.67 in to 4.25 in**

Designed for applications with long and soft deceleration: The ACE TUBUS range TR-L radial tube dampers are maintenance-free, ready-to-install elements made of co-polyester elastomer.

Their radial load offers designers a very long and soft deceleration with a progressive reduction in energy at the end of the stroke. The TR-L range has been specially developed for a maximum stroke with a minimum height and a range of 63.7 in-lbs to 95,411 in-lbs (7.2 Nm to 10,780 Nm). The absorption capacity is dependent on the length of the selected tube damper. These models are available in sizes between  $\varnothing$  1.14" and  $\varnothing$  46.77". ( $\varnothing$  29 mm and  $\varnothing$  188 mm).

The TUBUS TR-L is used where impact or collision protection is necessary along a straight line e.g. on shovels in mining equipment, loading and lifting devices, dock systems in shipbuilding or luggage and transport belts.

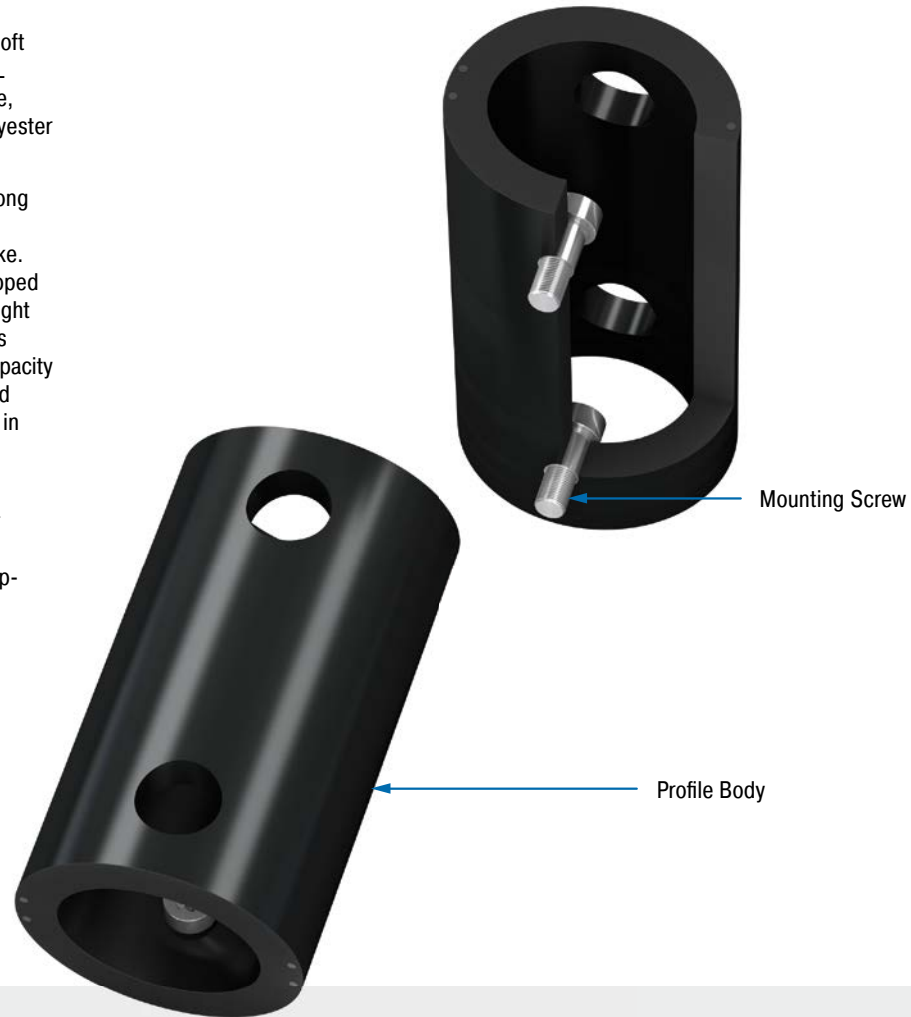

### Technical Data

**Energy capacity:** 63.7 in-lbs/Cycle to 68,151 in-lbs/Cycle

**Energy absorption:** 26 % to 41 %

**Dynamic force range:** 295 lbs to 48,941 lbs

**Operating temperature range:** -40 °F to 194 °F

**Construction size:** 1.14 in to 7.40 in

**Mounting:** In any position

**Material hardness rating:** Shore 55D

**Material:** Profile body: Co-Polyester Elastomer

**Environment:** Resistant to microbes, seawater or chemical attack. Excellent UV and

ozone resistance. Material does not absorb water or swell.

**Impact velocity range:** Max. 16.4 ft/sec

**Torque max.:**

M5: 2.21 ft-lbs

M8: 14.75 ft-lbs

M16: 29.50 ft-lbs (DIN912)


M16: 88.51 ft-lbs (Shouldered screw)

**Application field:** Offshore industry, Agricultural machinery, Impact panels, Conveyor systems, Stacking units, Shipbuilding, Shovels or articulated joints for construction machinery, Transport roads, Loading and lifting equipment

**Note:** Suitable for emergency stop applications and for continuous use. For applications with preloading and increased temperatures please consult ACE.

**Safety information:** Mounting screw should additionally be secured with Loctite.

**On request:** Special strokes, -characteristics, -spring rates, -sizes and -materials.

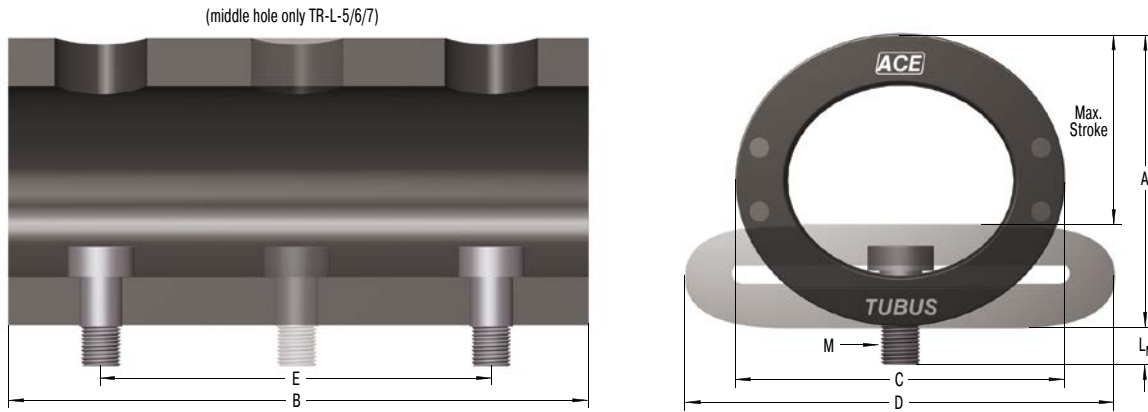**TR-L**


The calculation and selection of the most suitable damper should be carried out or be approved by ACE.

**Ordering Example**

TUBUS Radial \_\_\_\_\_ **TR66-40L-2**  
 Outer- $\varnothing$  2.60" (66 mm) \_\_\_\_\_  
 Stroke 1.57" (40 mm) \_\_\_\_\_  
 Long Version \_\_\_\_\_  
 Length 2 = 12.01" (305 mm) \_\_\_\_\_

**Performance and Dimensions**

TYPES	Emergency Stop		Stroke max. inch	A inch	B inch	C inch	D inch	E inch	L <sub>M</sub> inch	M	Weight lbs
	<sup>1</sup> E <sub>3</sub> in-lbs/cycle	E <sub>3</sub> in-lbs/cycle									
TR29-17L	63.7	96	0.67	0.98	3.15	1.14	1.50	1.57	0.20	M5	0.064
TR43-25L	124	289	0.98	1.46	3.15	1.69	2.28	1.57	0.20	M5	0.135
TR63-43L	194	283	1.69	2.17	3.15	2.48	3.43	1.57	0.20	M5	0.223
TR66-40L-1	903	1,266	1.57	2.32	5.98	2.60	3.43	4.02	0.31	M8	0.627
TR66-40L-2	1,806	2,531	1.57	2.32	12.01	2.60	3.43	10.00	0.31	M8	1.279
TR66-40L-3	2,708	3,788	1.57	2.32	17.99	2.60	3.43	15.98	0.31	M8	1.784
TR66-40L-4	3,611	5,054	1.57	2.32	24.02	2.60	3.43	22.01	0.31	M8	2.347
TR66-40L-5	4,514	6,319	1.57	2.32	30.00	2.60	3.43	27.99	0.31	M8	2.963
TR76-45L-1	1,283	1,797	1.77	2.68	5.98	2.99	3.94	4.02	0.31	M8	0.838
TR76-45L-2	2,567	3,593	1.77	2.68	12.01	2.99	3.94	10.00	0.31	M8	1.535
TR76-45L-3	3,850	5,390	1.77	2.68	17.99	2.99	3.94	15.98	0.31	M8	2.492
TR76-45L-4	5,133	7,187	1.77	2.68	24.02	2.99	3.94	22.01	0.31	M8	3.153
TR76-45L-5	6,417	8,984	1.77	2.68	30.00	2.99	3.94	27.99	0.31	M8	4.013
TR83-48L-1	1,593	2,230	1.89	2.87	5.98	3.27	4.17	4.02	0.31	M8	1.058
TR83-48L-2	3,186	4,461	1.89	2.87	12.01	3.27	4.17	10.00	0.31	M8	1.917
TR83-48L-3	4,779	6,691	1.89	2.87	17.99	3.27	4.17	15.98	0.31	M8	3.043
TR83-48L-4	6,373	8,922	1.89	2.87	24.02	3.27	4.17	22.01	0.31	M8	3.991
TR83-48L-5	7,966	11,152	1.89	2.87	30.00	3.27	4.17	27.99	0.31	M8	4.983
TR99-60L-1	2,390	3,346	2.36	3.46	5.98	3.90	5.12	4.02	0.31	M8	1.299
TR99-60L-2	4,779	6,691	2.36	3.46	12.01	3.90	5.12	10.00	0.31	M8	2.567
TR99-60L-3	7,169	10,037	2.36	3.46	17.99	3.90	5.12	15.98	0.31	M8	4.278
TR99-60L-4	9,559	13,382	2.36	3.46	24.02	3.90	5.12	22.01	0.31	M8	5.865
TR99-60L-5	11,949	16,728	2.36	3.46	30.00	3.90	5.12	27.99	0.31	M8	6.836
TR99-60L-6	14,338	20,073	2.36	3.46	35.98	3.90	5.12	34.02	0.31	M8	8.255
TR99-60L-7	16,728	23,419	2.36	3.46	42.01	3.90	5.12	40.00	0.31	M8	9.482
TR143-86L-1	5,310	7,435	3.39	5.00	5.98	5.63	7.52	2.99	0.87	M16	3.462
TR143-86L-2	10,621	14,869	3.39	5.00	12.01	5.63	7.52	7.99	0.87	M16	6.262
TR143-86L-3	15,931	22,304	3.39	5.00	17.99	5.63	7.52	13.98	0.87	M16	8.555
TR143-86L-4	21,242	29,738	3.39	5.00	24.02	5.63	7.52	20.00	0.87	M16	11.951
TR143-86L-5	26,552	37,173	3.39	5.00	30.00	5.63	7.52	25.98	0.87	M16	15.589
TR143-86L-6	31,863	44,608	3.39	5.00	35.98	5.63	7.52	31.97	0.87	M16	18.456
TR143-86L-7	37,173	52,042	3.39	5.00	42.01	5.63	7.52	37.99	0.87	M16	20.903
TR188-108L-1	9,736	13,630	4.25	6.50	5.98	7.40	9.65	2.99	1.02	M16	5.465
TR188-108L-2	19,472	27,260	4.25	6.50	12.01	7.40	9.65	7.99	1.02	M16	8.897
TR188-108L-3	29,207	40,890	4.25	6.50	17.99	7.40	9.65	13.98	1.02	M16	15.898
TR188-108L-4	38,943	54,521	4.25	6.50	24.02	7.40	9.65	20.00	1.02	M16	21.653
TR188-108L-5	48,679	68,151	4.25	6.50	30.00	7.40	9.65	25.98	1.02	M16	25.115
TR188-108L-6	58,415	81,781	4.25	6.50	35.98	7.40	9.65	31.97	1.02	M16	30.716
TR188-108L-7	68,151	95,411	4.25	6.50	42.01	7.40	9.65	37.99	1.02	M16	35.148

<sup>1</sup> Max. energy capacity per cycle for continuous use.

## TUBUS TR-HD

Compact powerhouse in solid material

**Radial Damping, Heavy Duty Version**


**Energy capacity 3,585 in-lbs/Cycle to 104,793 in-lbs/Cycle**

**Maximum stroke 0.47 in to 1.73 in**

Impact and collision protection: The TR-HD profile dampers are stressed in the same way as the basic model TR but offer a higher force and energy absorption with a shorter damping distance thanks to the solid design. Different damping characteristic curves can be achieved with two different co-polyester elastomer hardness levels. The slightly oval (bi-concave) shape also ensures a softer force intake.

This product family absorbs a lot of energy despite the low height: a range of 3,585 in-lbs to 104,793 in-lbs (405 Nm to 11,840 Nm) is progressively covered by strokes of 0.47" to 1.73" (12 mm to 44 mm). Delivered with two included screws, the damper can be easily and quickly installed both horizontally or vertically. The drill hole distance can be adapted if required.

These dampers are used in agricultural technology and on shovels or break joints on construction machines as well as on loading and lifting or similar equipment.

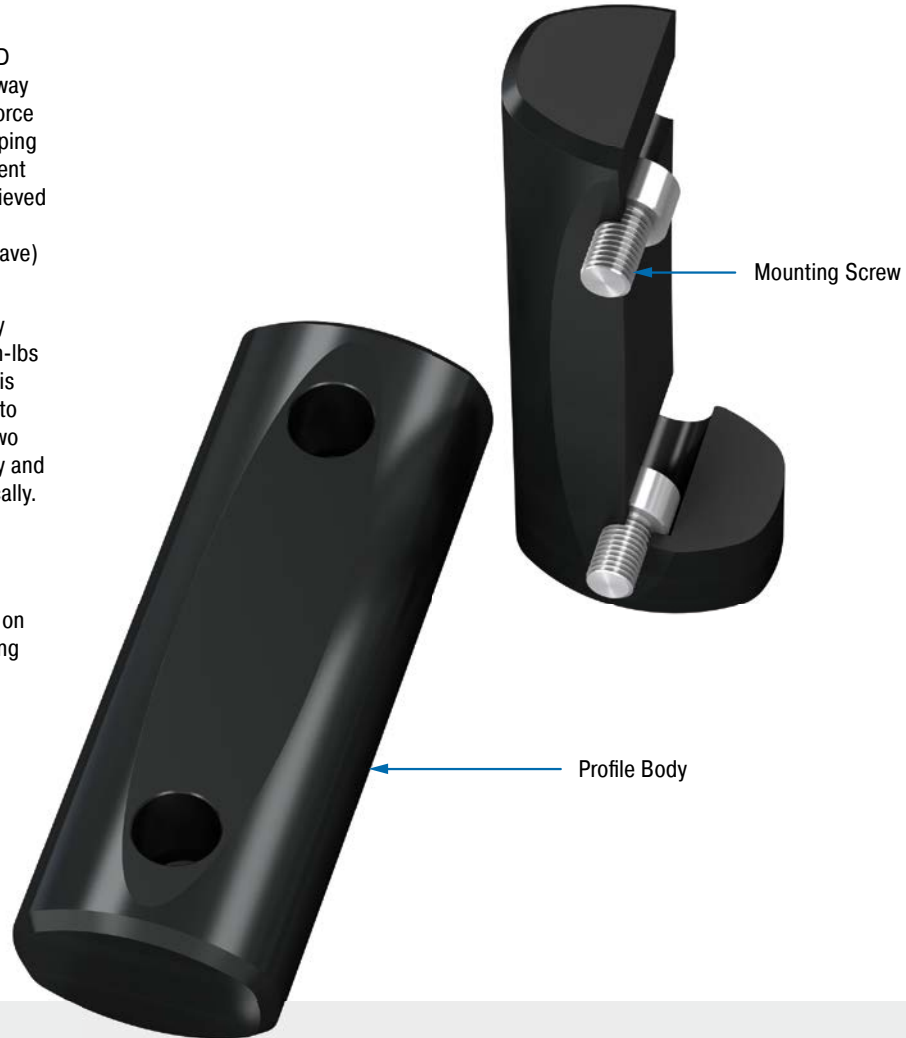

### Technical Data

**Energy capacity:** 3,585 in-lbs/Cycle to 104,793 in-lbs/Cycle

**Energy absorption:** 43 % to 72 %

**Dynamic force range:** 17,715 lbs to 182,748 lbs

**Operating temperature range:** -40 °F to 194 °F

**Construction size:** 1.65 in to 46.29 in

**Mounting:** In any position

**Material hardness rating:** Shore 40D, Shore 55D

**Material:** Profile body: Co-Polyester Elastomer

**Environment:** Resistant to microbes, seawater or chemical attack. Excellent UV and ozone resistance. Material does not absorb water or swell.

**Impact velocity range:** Max. 16.4 ft/sec

**Torque max.:**

M10: 5.16 ft-lbs

M12: 8.85 ft-lbs

**Application field:** Offshore industry, Agricultural machinery, Impact panels, Conveyor systems, Stacking units, Shipbuilding, Shovels or articulated joints for construction machinery, Transport roads, Loading and lifting equipment

**Note:** Suitable for emergency stop applications and for continuous use. For applications with preloading and increased temperatures please consult ACE.



**Safety information:** Mounting screw should additionally be secured with Loctite.

**On request:** Special strokes, -characteristics, -spring rates, -sizes and -materials.



Radial Damping, Heavy Duty Version


### TR-HD

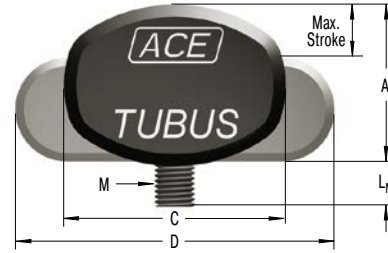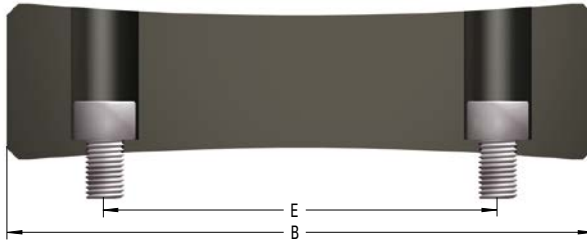

### Characteristics

#### TUBUS TR-HD

#### Force-Stroke Characteristics (static)

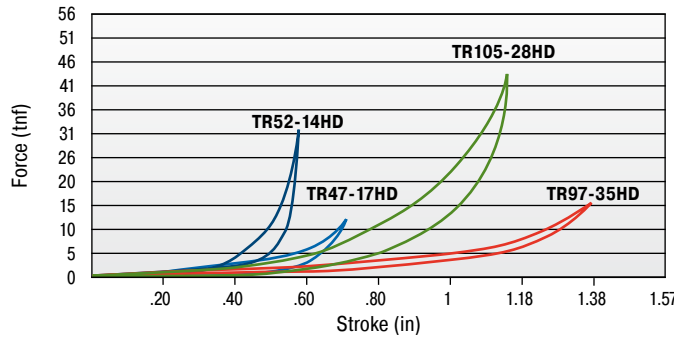

The calculation and selection of the most suitable damper should be carried out or be approved by ACE.

#### Ordering Example

TUBUS Radial \_\_\_\_\_  
 Outer- $\varnothing$  2.48" (63 mm) \_\_\_\_\_  
 Stroke 0.94" (24 mm) \_\_\_\_\_  
 Heavy Duty Version \_\_\_\_\_

**TR63-24HD**

### Performance and Dimensions

TYPES	Emergency Stop		F max. static lbs	Stroke max. inch	A inch	B inch	C inch	D inch	E inch	L <sub>M</sub> inch	M	Weight lbs
	<sup>1</sup> E <sub>3</sub> in-lbs/cycle	E <sub>3</sub> in-lbs/cycle										
TR42-14HD	3,585	5,018	14,365	0.58	1.33	5.84	1.65	2.31	4.02	0.79	M10	0.472
TR47-12HD	7,585	10,621	33,632	0.48	1.23	5.92	1.83	2.28	4.02	0.75	M10	0.494
TR47-17HD	7,523	10,532	27,449	0.67	1.27	5.90	1.84	2.75	4.02	0.94	M10	0.494
TR52-14HD	14,462	20,250	68,455	0.47	1.07	6.10	2.14	2.73	4.02	0.87	M10	0.494
TR57-21HD	10,568	14,798	23,560	0.86	1.87	5.86	2.23	3.12	4.02	0.71	M10	0.847
TR62-15HD	15,843	22,180	55,078	0.62	1.59	6.02	2.44	3.04	4.02	0.63	M10	0.825
TR62-19HD	26,021	36,430	87,653	0.66	1.50	6.25	2.94	3.71	4.02	0.63	M10	0.706
TR63-24HD	18,241	25,534	43,703	0.97	1.79	6.02	2.46	3.61	4.02	0.79	M10	0.831
TR72-26HD	15,046	21,065	28,056	1.04	2.33	5.88	2.84	3.86	4.02	0.91	M12	1.235
TR79-20HD	24,729	34,624	65,038	0.82	2.11	6.04	3.12	3.86	4.02	0.94	M12	1.411
TR79-31HD	26,331	36,863	50,942	1.17	2.21	6.09	3.10	4.42	4.02	0.91	M12	1.169
TR85-33HD	22,357	31,296	32,845	1.26	2.75	5.89	3.20	4.36	4.02	0.91	M12	1.566
TR89-21HD	39,280	54,990	107,324	0.85	1.88	6.37	3.50	4.42	4.02	0.87	M12	1.389
TR90-37HD	33,456	46,838	54,112	1.48	2.71	6.11	3.56	5.04	4.02	0.91	M12	1.808
TR93-24HD	30,278	42,386	68,005	0.96	2.50	6.10	3.66	4.54	4.02	0.91	M12	1.742
TR97-31HD	68,487	95,880	129,311	1.00	2.23	6.45	4.11	5.07	4.02	0.83	M12	1.918
TR97-35HD	24,968	34,952	34,351	1.50	3.30	5.93	3.85	5.16	4.02	0.79	M12	2.337
TR102-44HD	41,572	58,202	57,214	1.74	3.18	6.15	4.10	5.80	4.02	0.87	M12	2.315
TR105-28HD	49,927	69,894	96,129	1.02	2.74	6.14	4.12	4.97	4.02	0.83	M12	2.205
TR117-30HD	74,851	104,793	143,676	1.09	2.48	6.57	4.59	5.61	4.02	0.98	M12	2.381

<sup>1</sup> Max. energy capacity per cycle for continuous use.

# Application Examples


## TUBUS TA

### Safe end position damping

ACE TUBUS profile dampers protect the integrated loading station on a new high speed machining center. The ACE TUBUS damper is designed to prevent overrun on the high speed loading station of a Camshaft machining centre used in the automobile industry. In the event that the drive train fails during operation or incorrect data is inputted the ACE TUBUS damper absorbs the impact preventing costly damage to the machine. The TA98-40 TUBUS damper impressed engineers with this exceptionally long service life in operation. When used as an emergency stop the TUBUS damper can absorb up to 73 % of the impact energy.



Safety with ultra high speed operation

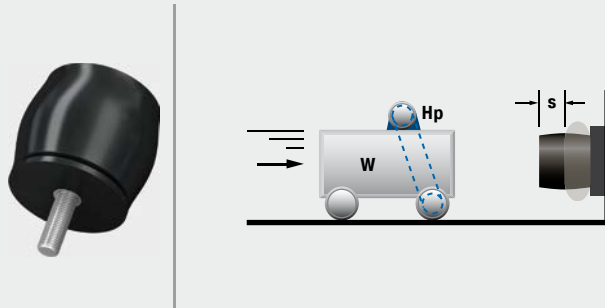


## TUBUS TS

### Safe braking of maintenance boats

The maintenance of wind turbines in open seas has long resulted in damage to maintenance boats. Because of impact velocity and swell, an increase in the boat's mass of up to 20 percent must be taken into account when landing on a rigid mooring structure. It is only since the landing operation has been carried out with the aid of the ACE company's TUBUS series that cable repair and maintenance work on wind turbines has been made safe for both personnel and equipment. TUBUS of the type TS84-43 are seawater resistant and can withstand ambient temperatures from -40 °F to + 194 °F.



Seawater-resistant, robust TUBUS profile dampers made of co-polyester elastomer allow boats and crew to dock safely  
Wals Diving and Marine Service, 1970AC IJmuiden, Netherlands

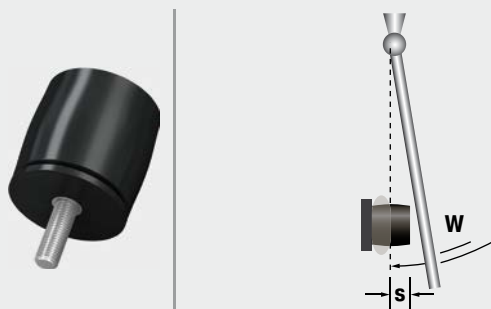

Issue 04.2018 – Specifications subject to change


### TUBUS TS

#### Protection of drive used in space treadmill

When training in zero gravity, a harness with bungee cords is used to ensure that trainees do not become disengaged. Three ACE profile dampers with a linear-working facility are utilized in this case. One TUBUS is positioned in the pneumatic cylinder, while the other two are put in place in the rest of the system. All the dampers have the task of protecting the system if the treadmill drive belts become damaged. Otherwise, the cylinder would reach a very high speed and become seriously damaged at the end of the stroke.



TUBUS are used to protect a fitness machine in zero gravity  
QinetiQ Space nv, 9150 Kruibekke, Belgium

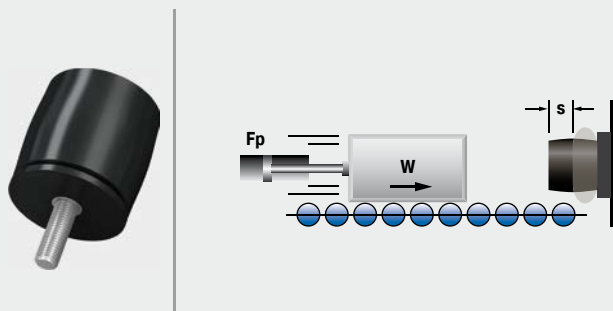


### TUBUS TR

#### Gentle damping for electric scooters

TUBUS bumpers make driving an e-scooter a real experience. The footboard of an electric scooter should be dampened to enable the driver to experience a comfortable ride even over potholes and other bumpy surfaces. Ideally, the characteristic line should be furnished with a soft increase in force over a long stroke. The elegant look of the scooter as well as the folding mechanism designed to save space have not allowed the use of feasible damper solutions until now. Inferior alternatives such as rubber dampers made of polyurethane or simple steel springs could not be considered from the start. The TUBUS bumper TR52-32H offered the perfect solution with its compact construction design paired with progressive damping action.



Profile dampers increase the riding comfort of an electric scooter

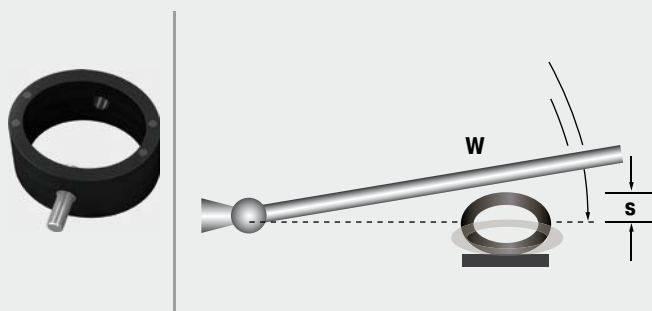

# Special Profile Dampers

## Cost-effective damping for your pressing tools

**ACE provides TUBUS profile dampers in many variations. Special solutions for presses can now be cost-effectively achieved with down holder dampers, damping plugs, lift dampers and press dampers from ACE.**

They replace the PU-springs previously used in the automotive industry. It was no longer possible for them to fulfil the required tasks due to the higher return stroke speeds in modern pressing tools. Made of co-polyester elastomers, the TUBUS special takes care of the protection of mounting bolts and insert bolts much more reliably. On the one hand they protect a so-called down holders during the return stroke after the forming of sheet metal parts, and on the other they function as protection for hoisting lifters.

High reliability

Long service life

High power and energy absorption

Efficient working through higher cycle rates

Extreme abrasion hardness and sheer strength

Noise reduction



## TUBUS Special Profile Dampers

### A wide range of solutions for your tools

Small but effective: These versatile, custom-manufactured components make all the difference during sheet metal forming in the automotive and tool industries thanks to long service lives and high power absorption.



#### TUBUS Down Holder Dampers

##### The innovation as a substitute for overburdened PU springs

The axial-functioning elements are ideal for different diameters of mounting bolts from M10 to M30 in the press tools. They increase clock rates, service lives and reliability during increased cushioning strokes there.



#### TUBUS Lift Dampers

##### The brother of the down holder damper

Used in the end position damping in ProgDie presses, they sit on the mounting bolts of the spring-loaded belt guide rails or hoisting lifters in the bottom part of the tool of the follow-on composite tool, protect it and accelerate production.



#### TUBUS Damping Plugs

##### A special kind of emergency plug

These side-mounted, radial damping elements also protect the mounting bolts and insert bolts during the opening of the pressing tools. They are available in four different sizes and are used in large tools.



#### TUBUS Press Dampers

##### When a side effect (nearly) becomes the main thing


All TUBUS specials additionally reduce noise. In press dampers, used particularly in eccentric presses by manufacturers of large household appliances, this is however the main task. Screwed into a hole pocket, they also effectively protect the tools.

# Damping Pads

## Customized damping technology

**With damping pads from the SLAB series, ACE provides solutions to effectively slow down loads impacting large and small surfaces. This means that these products are found in a wide range of damping technologies from ACE where oscillation begins or where damaging impacts in construction designs need to be slowed over a large surface.**

The ACE SLAB pads, available to choose in any size, absorb static loads from 0.26 to 2.65 in-lb<sup>2</sup> and can be either cut to size according to each requirement or designed as a molded part. Simply use an adhesive to install. The standard plate heights are between 0.5 and 1 inch. Many different coatings clear the way for numerous applications and not least because they can be used in a temperature range from 23 °F to 122 °F.

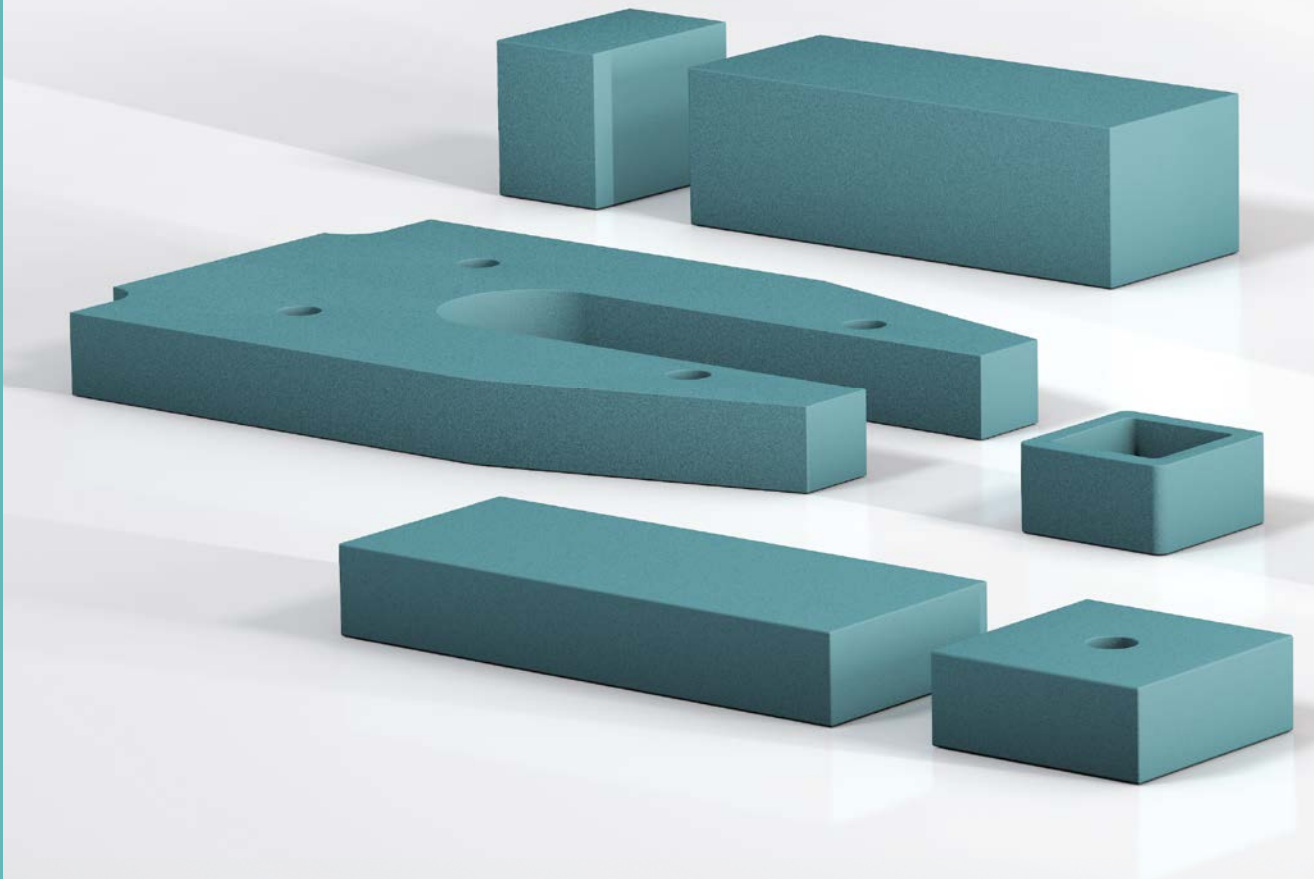

## Individual Pad Cutting

**SLAB pads pre-assembled for each project**

Whether pads, cuts or drawing parts, stocked SLAB pads in combination with our freely programmable cutting machine ensure maximum flexibility with excellent delivery speed.

**Fast, flexible and adapted to your conditions.**

*Ask for special solutions!!!*


Can be integrated quickly and cost-effectively

Immense inner damping

Pad thicknesses up to 3.15 inch on request

Can be assembled with CNC cutting machines

Patented formula

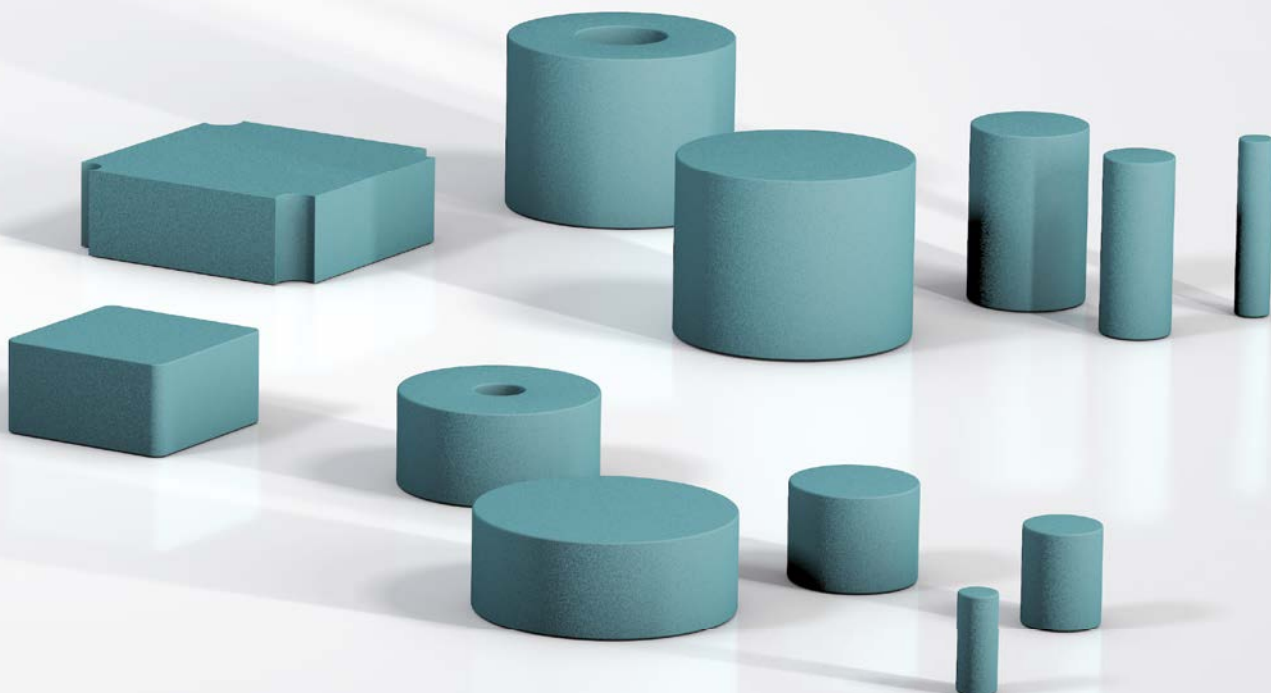

## SLAB 030 to SLAB 300

### Energy absorption in pad format

#### Connectable and Combinable


**Energy capacity 27.4 in-lbs/Cycle to 1,858.7 in-lbs/Cycle**

**Stroke 0.26 inch to 0.49 inch**

Tailor made damping material in pad format: SLAB damping pads are made of a viscoelastic PUR-material. They absorb impact loads extremely effectively and are also suitable for insulating or damping vibration.

The pads of the product family SL-030 to SL-300 are quickly adapted to the relevant type of application. This is in part achieved through the configuration of the calculating tool or directly by the ACE specialist engineers. Furthermore, this is possible because the standard material can be cut exactly and quickly to any customer requirement with our new cutting system. It is also possible to obtain a sample to find an optimum solution.

The SLAB damping pads are proven impact or collision protection. They are used on luggage and transport belts, conveyor systems, pneumatic, electromechanical and hydraulic drives as well as on linear carriages.

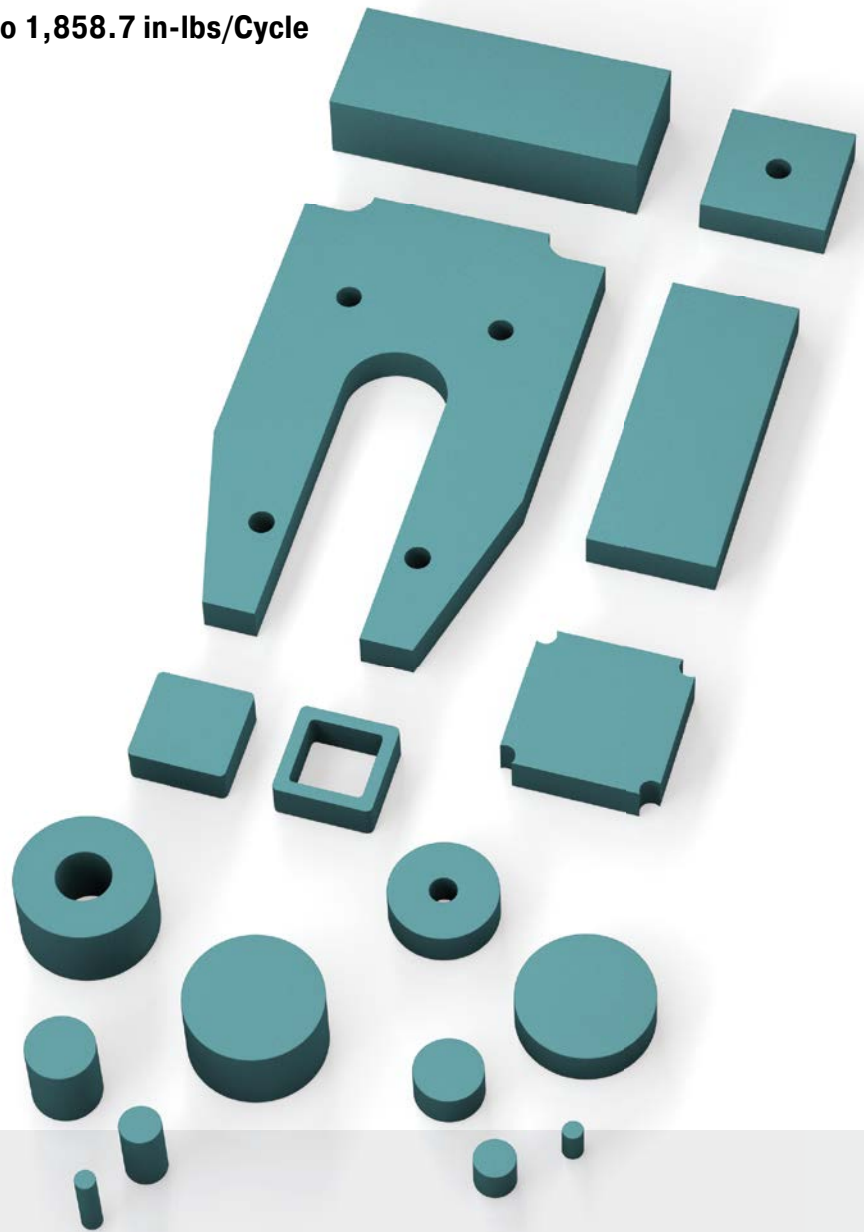

#### Technical Data

**Energy capacity:** 27.4 in-lbs/Cycle to 1,858.7 in-lbs/Cycle

**Standard density:**

SL-030 = approx. 12.48 lbs/ft<sup>3</sup>

SL-100 = approx. 27.47 lbs/ft<sup>3</sup>

SL-300 = approx. 42.45 lbs/ft<sup>3</sup>

**Standard colour:** Green

**Dimensions:**

Widths: up to 59 inch

Lengths: up to 197 inch

Thicknesses: 0.5 inch and 1 inch

**Environment:** Resistant against ozone and UV radiation. Chemical resistancy on request.

**Operating temperature range:** 23 °F to 122 °F

**Material:** Profile body: Mixed cellular PUR-Elastomer (polyurethane)

**Application field:** Linear slides, Handling modules, Luggage and transport belts, Impact panels, Pipeline insulation, Foundation mounting, Conveyor technology, Electronic systems and controls, Medical technology, Buildings


**Note:** Possibilities for cutting: Water jet cutting, stamping, splitting, sawing and drilling

**Safety information:** Fire rating: B2, normally flammable, according to DIN 4102

**On request:** Special versions with further dimensions such as thicknesses, colours, shapes and drawing parts e.g. curves. Different wear layers.




### SL-030-12

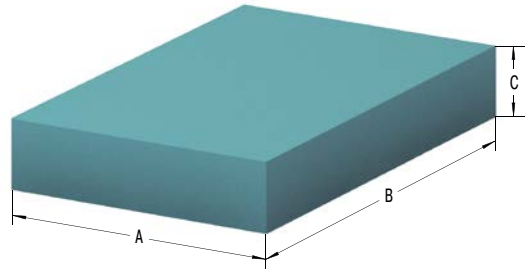

### Characteristics

**Type SL-030-12**  
**Force-Stroke Characteristic (dynamic)**  
**Stroke Utilization 0.26 in**

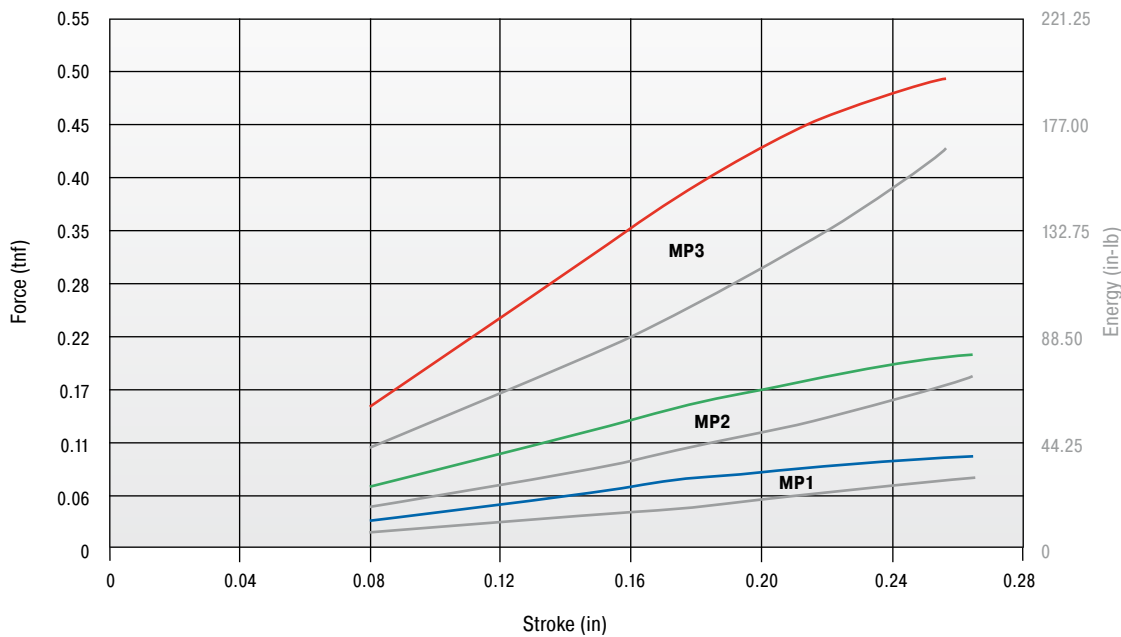

**Load data**  
 Dynamic load, impact velocity: approx. 3.28 ft/s

— (Red)	Area	15,500 in <sup>2</sup>
— (Green)	Area	7,750 in <sup>2</sup>
— (Blue)	Area	3,875 in <sup>2</sup>

tnf = ton force

The chosen damping plate should be tested by the customer on the specific application.

#### Ordering Example

ACE-SLAB \_\_\_\_\_ **SL-030-12-Dxxxx**  
 Material Type \_\_\_\_\_  
 Material Thickness 0.49" (12.5 mm) \_\_\_\_\_  
 Customers Specific Dimension/Shape \_\_\_\_\_  
 (D-Number is assigned by ACE)


#### Performance and Dimensions

TYPES	<sup>1</sup> E <sub>3</sub> max. in-lbs/cycle	<sup>1</sup> Stroke inch	A inch	B inch	C inch	Area inch <sup>2</sup>	Standard density lbs/ft <sup>3</sup>	Return Time s	Weight lbs
SL-030-12-D-MP1	27.44	0.26	1.97	1.97	0.49	3.875	12.48	4	0.014
SL-030-12-D-MP2	70.81	0.26	2.78	2.78	0.49	7.750	12.48	4	0.028
SL-030-12-D-MP3	168.16	0.26	3.94	3.94	0.49	15.500	12.48	4	0.055

<sup>1</sup> Maximum energy absorption in terms of area graded pad sizes as a reference for the correct selection of material and pad size. The energy absorption depends on the individual impact surface and stroke utilization.


Connectable and Combinable

SL-030-25

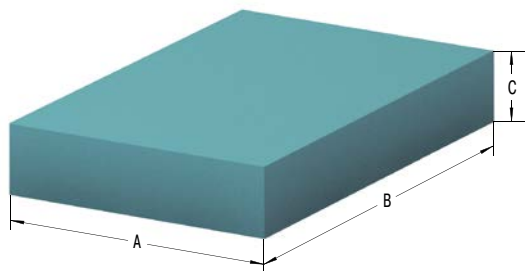

Characteristics

Type SL-030-25  
 Force-Stroke Characteristic (dynamic)  
 Stroke Utilization 0.49 in

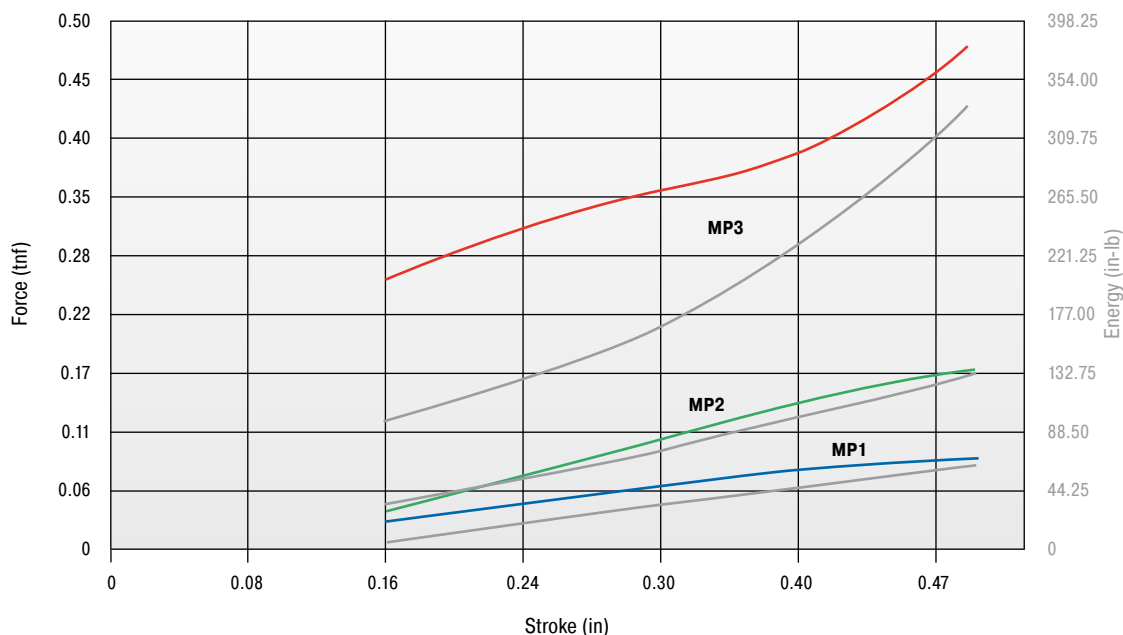

**Load data**  
 Dynamic load, impact velocity: approx. 3.28 ft/s

— (Red)	Area 15,500 in <sup>2</sup>
— (Green)	Area 7,750 in <sup>2</sup>
— (Blue)	Area 3,875 in <sup>2</sup>

tnf = ton force

The chosen damping plate should be tested by the customer on the specific application.

Ordering Example


SL-030-25-Dxxxx  
 ACE-SLAB \_\_\_\_\_  
 Material Type \_\_\_\_\_  
 Material Thickness 0.98" (25 mm) \_\_\_\_\_  
 Customers Specific Dimension/Shape \_\_\_\_\_  
 (D-Number is assigned by ACE)

Performance and Dimensions

TYPES	<sup>1</sup> E <sub>3</sub> max. in-lbs/cycle	<sup>1</sup> Stroke inch	A inch	B inch	C inch	Area inch <sup>2</sup>	Standard density lbs/ft <sup>3</sup>	Return Time s	Weight lbs
SL-030-25-D-MP1	59.30	0.49	1.97	1.97	0.98	3.875	12.48	5	0.028
SL-030-25-D-MP2	132.76	0.49	2.78	2.78	0.98	7.750	12.48	5	0.055
SL-030-25-D-MP3	371.73	0.49	3.94	3.94	0.98	15.500	12.48	5	0.110


<sup>1</sup> Maximum energy absorption in terms of area graded pad sizes as a reference for the correct selection of material and pad size. The energy absorption depends on the individual impact surface and stroke utilization.

### SL-100-12

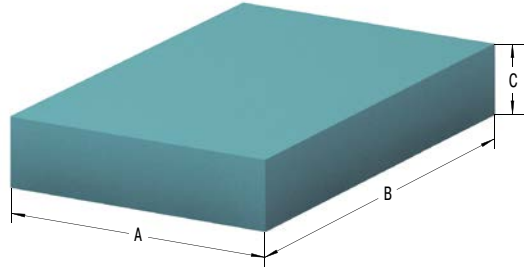

### Characteristics

**Type SL-100-12**  
**Force-Stroke Characteristic (dynamic)**  
**Stroke Utilization 0.26 in**

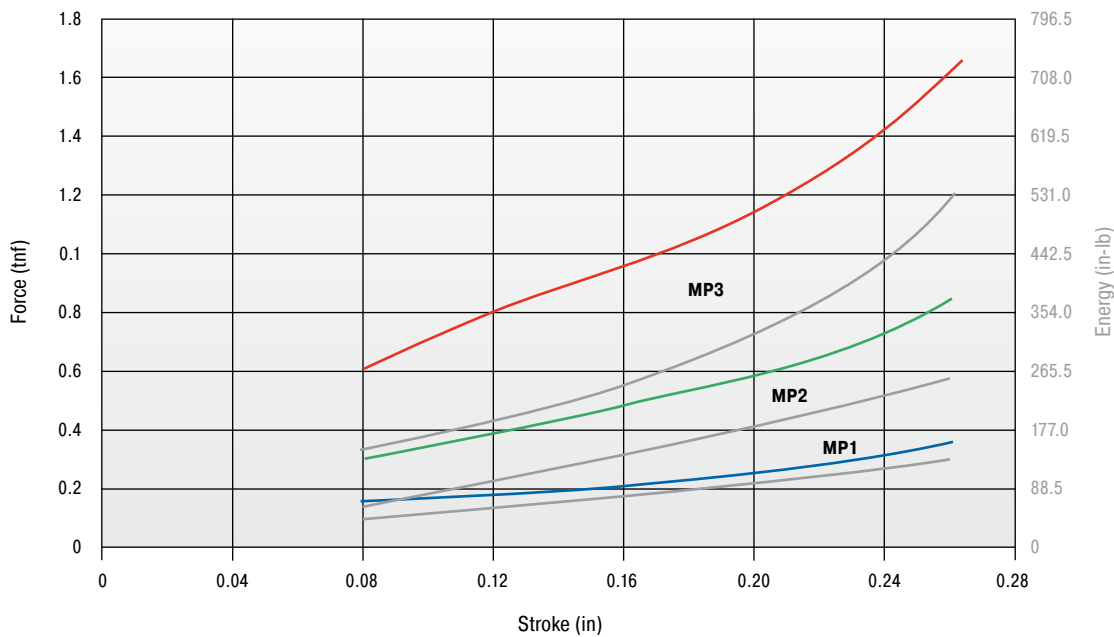

**Load data**

Dynamic load, impact velocity: approx. 3.28 ft/s

— (Red line)	Area	15,500 in <sup>2</sup>
— (Green line)	Area	7,750 in <sup>2</sup>
— (Blue line)	Area	3,875 in <sup>2</sup>

tnf = ton force

The chosen damping plate should be tested by the customer on the specific application.

**Ordering Example**

ACE-SLAB \_\_\_\_\_ **SL-100-12-Dxxxx**  
 Material Type \_\_\_\_\_  
 Material Thickness 0.49" (12.5 mm) \_\_\_\_\_  
 Customers Specific Dimension/Shape \_\_\_\_\_  
 (D-Number is assigned by ACE)


**Performance and Dimensions**

TYPES	<sup>1</sup> E <sub>3</sub> max. in-lbs/cycle	<sup>1</sup> Stroke inch	A inch	B inch	C inch	Area inch <sup>2</sup>	Standard density lbs/ft <sup>3</sup>	Return Time s	Weight lbs
SL-100-12-D-MP1	132.76	0.26	1.97	1.97	0.49	3.875	27.47	4	0.030
SL-100-12-D-MP2	265.52	0.26	2.78	2.78	0.49	7.750	27.47	4	0.061
SL-100-12-D-MP3	531.04	0.26	3.94	3.94	0.49	15.500	27.47	4	0.121

<sup>1</sup> Maximum energy absorption in terms of area graded pad sizes as a reference for the correct selection of material and pad size. The energy absorption depends on the individual impact surface and stroke utilization.


Connectable and Combinable

**SL-100-25**

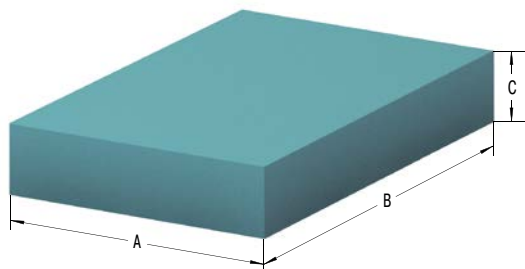

**Characteristics**

**Type SL-100-25**  
**Force-Stroke Characteristic (dynamic)**  
**Stroke Utilization 0.49 in**

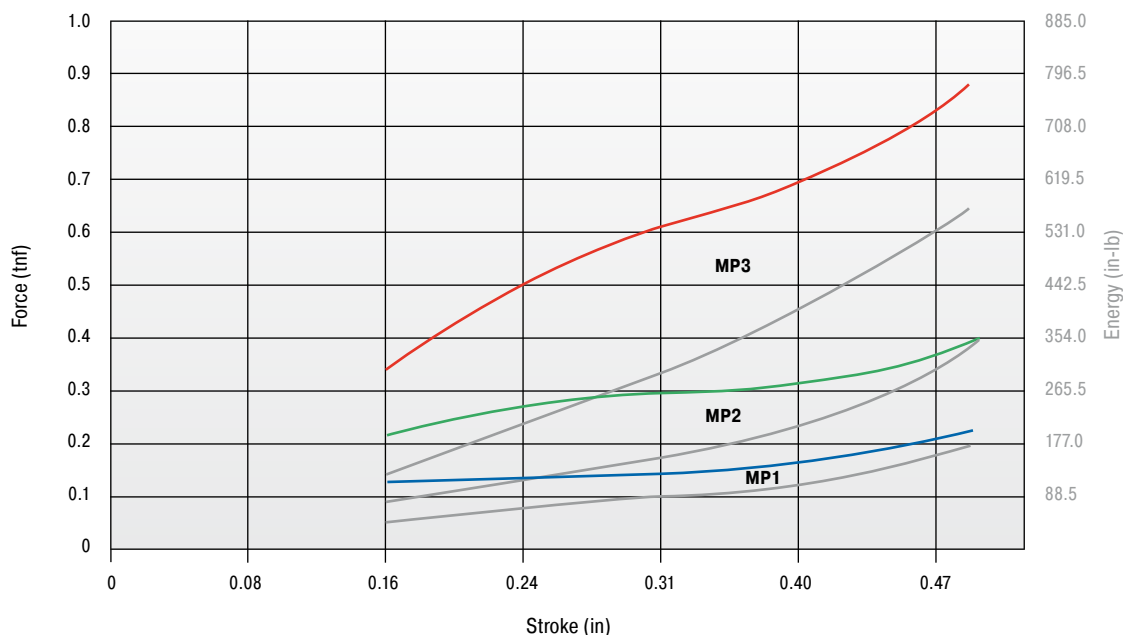

**Load data**  
 Dynamic load, impact velocity: approx. 3.28 ft/s

— (Red)	Area 15,500 in <sup>2</sup>
— (Green)	Area 7,750 in <sup>2</sup>
— (Blue)	Area 3,875 in <sup>2</sup>

tnf = ton force

The chosen damping plate should be tested by the customer on the specific application.

**Ordering Example**

ACE-SLAB \_\_\_\_\_  
 Material Type \_\_\_\_\_  
 Material Thickness 0.98" (25 mm) \_\_\_\_\_  
 Customers Specific Dimension/Shape \_\_\_\_\_  
 (D-Number is assigned by ACE)


**SL-100-25-Dxxxx**

**Performance and Dimensions**

TYPES	<sup>1</sup> E <sub>3</sub> max. in-lbs/cycle	<sup>1</sup> Stroke inch	A inch	B inch	C inch	Area inch <sup>2</sup>	Standard density lbs/ft <sup>3</sup>	Return Time s	Weight lbs
SL-100-25-D-MP1	177.01	0.49	1.97	1.97	0.98	3.875	27.47	5	0.061
SL-100-25-D-MP2	354.03	0.49	2.78	2.78	0.98	7.750	27.47	5	0.121
SL-100-25-D-MP3	557.60	0.49	3.94	3.94	0.98	15.500	27.47	5	0.243


<sup>1</sup> Maximum energy absorption in terms of area graded pad sizes as a reference for the correct selection of material and pad size. The energy absorption depends on the individual impact surface and stroke utilization.

### SL-300-12

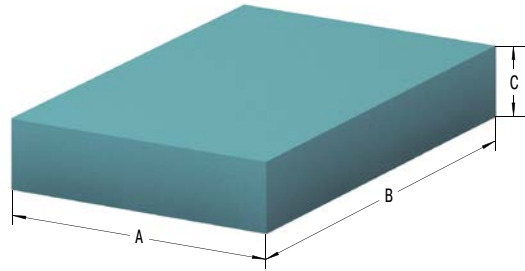

### Characteristics

**Type SL-300-12**  
**Force-Stroke Characteristic (dynamic)**  
**Stroke Utilization 0.26 in**

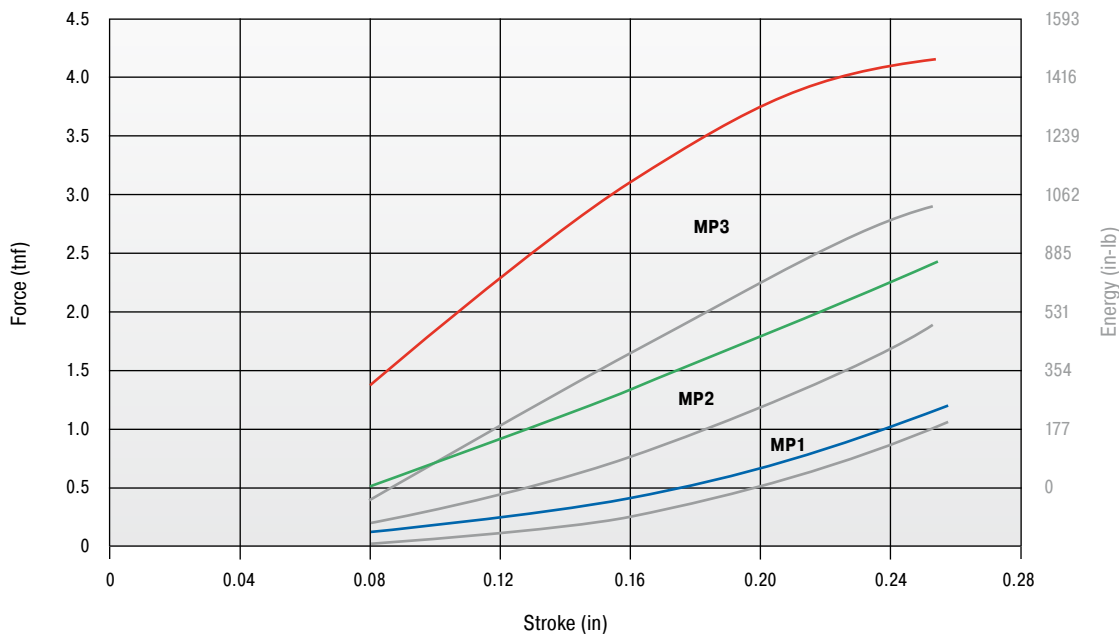

**Load data**

Dynamic load, impact velocity: approx. 3.28 ft/s



tnf = ton force

The chosen damping plate should be tested by the customer on the specific application.

**Ordering Example**

ACE-SLAB \_\_\_\_\_ **SL-300-12-Dxxxx**  
 Material Type \_\_\_\_\_  
 Material Thickness 0.49" (12.5 mm) \_\_\_\_\_  
 Customers Specific Dimension/Shape \_\_\_\_\_  
 (D-Number is assigned by ACE)


**Performance and Dimensions**

TYPES	<sup>1</sup> E <sub>3</sub> max. in-lbs/cycle	<sup>1</sup> Stroke inch	A inch	B inch	C inch	Area inch <sup>2</sup>	Standard density lbs/ft <sup>3</sup>	Return Time s	Weight lbs
SL-300-12-D-MP1	336.33	0.26	1.97	1.97	0.49	3.875	42.45	3	0.046
SL-300-12-D-MP2	575.30	0.26	2.78	2.78	0.49	7.750	42.45	3	0.094
SL-300-12-D-MP3	1,070.94	0.26	3.94	3.94	0.49	15.500	42.45	3	0.187

<sup>1</sup> Maximum energy absorption in terms of area graded pad sizes as a reference for the correct selection of material and pad size. The energy absorption depends on the individual impact surface and stroke utilization.


Connectable and Combinable

**SL-300-25**

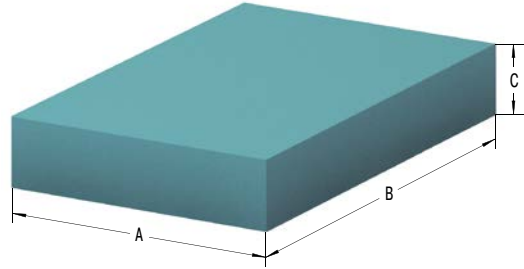

**Characteristics**

**Type SL-300-25**  
**Force-Stroke Characteristic (dynamic)**  
**Stroke Utilization 0.49 in**

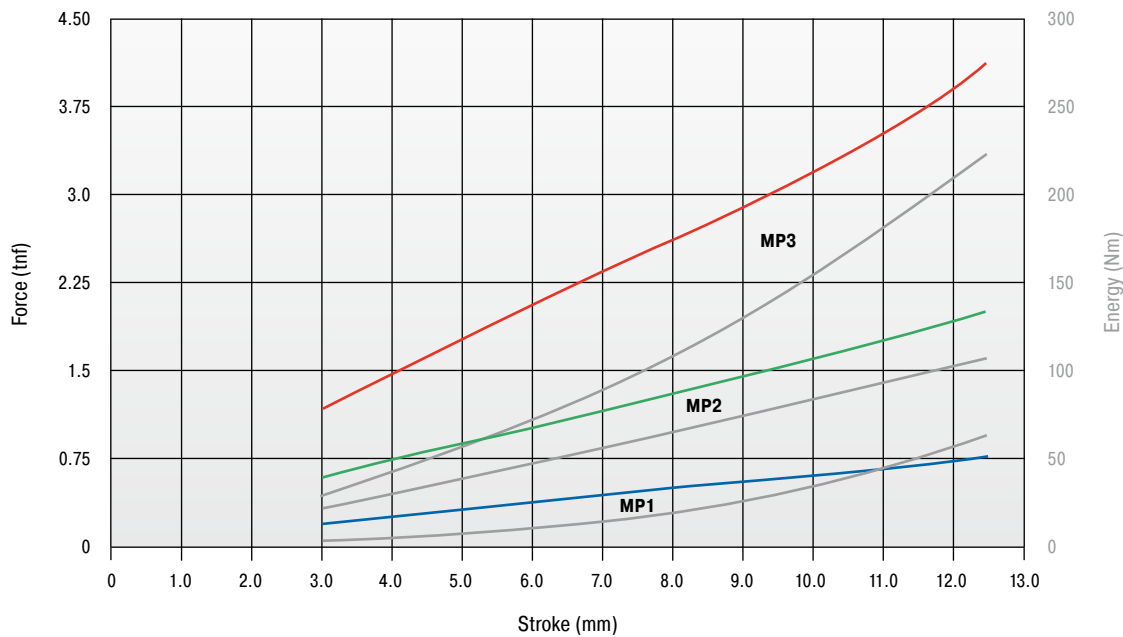

**Load data**  
 Dynamic load, impact velocity: approx. 3.28 ft/s



tnf = ton force

The chosen damping plate should be tested by the customer on the specific application.

**Ordering Example**

ACE-SLAB \_\_\_\_\_ **SL-300-25-Dxxxx**  
 Material Type \_\_\_\_\_  
 Material Thickness 0.98" (25 mm) \_\_\_\_\_  
 Customers Specific Dimension/Shape \_\_\_\_\_  
 (D-Number is assigned by ACE)

**Performance and Dimensions**

TYPES	<sup>1</sup> E <sub>3</sub> max. in-lbs/cycle	<sup>1</sup> Stroke inch	A inch	B inch	C inch	Area inch <sup>2</sup>	Standard density lbs/ft <sup>3</sup>	Return Time s	Weight lbs
SL-300-25-D-MP1	522.19	0.49	1.97	1.97	0.98	3.875	42.45	4	0.094
SL-300-25-D-MP2	893.92	0.49	2.78	2.78	0.98	7.750	42.45	4	0.187
SL-300-25-D-MP3	1,858.66	0.49	3.94	3.94	0.98	15.500	42.45	4	0.375

<sup>1</sup> Maximum energy absorption in terms of area graded pad sizes as a reference for the correct selection of material and pad size. The energy absorption depends on the individual impact surface and stroke utilization.

## Bonding of Polyurethane (PUR) Elastomers

Cellular and compact parts of polyurethane (PUR) elastomers SLAB damping pads can be bonded according to the following recommendations. If treatment instructions are followed, the strengths of the bonded joint can be equivalent to the elastomer material itself.

### 1. General Information

To achieve the required bonding strength it is necessary to ensure the correct adhesive is chosen for each individual application.

#### Contact bonding material

Thin adhesive film, with little filling of the gaps. Correcting or moving of the areas covered with bonding material is no longer possible after the first contact is made (contact effect).

Once a bonding is separated, the bonding process must be renewed.

Please note that creases, ripples or blisters cannot be straightened once the contact is made.

#### Hardening bonding material

(As thin as possible) the film of glue fills the joint. The gluing can be done after the edges are brought together.

### 2. Preparation

The preparation of bonding surfaces is of significant importance for the bonding strength. The surfaces must be adapted to each other and available in plain, clean form.

#### Careful removal of

Adhesive remnants, oil, fat, separating agents, dirt, dust, scales, molding layers, protective coating, finish, paint, sweat etc.

#### Mechanical support

Stripping, brushing, scraping, grinding, sandblasting.

#### Chemical support

Degreasing (washing off with grease remover), etching, priming; pay attention to chemical resistancy on the following page!

In general, SLAB damping pads in sheet form can be bonded without pretreatment. Molded parts, with or without special skin, have to be cleaned from left-over separating agents, if necessary by grinding. When bonding with other materials like plastic, wood, metal or concrete, mechanical and/or chemical additives have to be used.

The adhesive has to be prepared according to the formula, observing the manufacturer's recommendations. The adhesive film is also to be carefully applied pursuant to these details. (Tools: brush, spatula, adhesive spreader, airless spray gun).

#### Contact bonding material

Apply the non-gap-filling adhesive film to both bonding surfaces – the thinner, the better. To close the pores of low density materials, two layers may be necessary.

#### Hardening bonding material

Apply evenly. Possible irregularities can be compensated by the film thickness.

### 3. Bonding

When using contact bonding material, the flash off time has to be kept in mind. Especially, with systems containing water instead of usual solvents, the adhesive film must be as dry as possible in order to pass the 'finger test' – no marks appear when touching the adhesive surface. When using hardening bonding material, the parts have to be joined immediately after applying the bonding material.

### 4. Pressing

**Contact bonding material**      Contact pressure up to 2.85 in/lb<sup>2</sup>  
**Hardening bonding material**      Fix firmly

It is important to carefully follow the manufacturer's instructions with regard to processing temperature, hardening time and earliest possible loading.

### 5. Selection of Approved Bonding Materials

Because of the variety of materials that can be bonded together as well as numerous suitable bonding materials, we refer you to a worldwide leading producer of bonding and sealing materials.

Sika U.S.  
 Sika Corporation  
 201 Polito Avenue  
 Lyndhurst, NJ 07071  
 T +1 (800) 933-SIKA (7452)  
[www.usa.sika.com](http://www.usa.sika.com)

## Chemical Resistance

### Test (following DIN 53428)

Exposure time of the medium: 6 weeks at room temperature, but for concentrated acids and bases as well as solvents: 7 days at room temperature

### Evaluation Criteria

Changing of tensile strength and elongation of break (dry samples), change in volume

### Evaluation Standard

- |                                 |   |
|---------------------------------|---|
| <b>1 Excellent resistance</b>   | change in characteristics <10 %                 |
| <b>2 Good resistance</b>        | change in characteristics between 10 % and 20 % |
| <b>3 Conditional resistance</b> | change in characteristics partly above 20 %     |
| <b>4 Not resistant</b>          | change in characteristics all above 20 %        |

All information is based on our current knowledge and experiences. We reserve the rights for changes towards product refinement.

### Chemical Resistance

#### Water/Watery Solutions

#### SL-030 to SL-300

Water	1
Iron (III) chloride 10 %	1
Sodium carbonate	1
Sodium chlorate 10 %	1
Sodium chloride 10 %	1
Sodium nitrate 10 %	1
Tensides (div.)	1
Hydrogen peroxide 3 %	1
Laitance	1

#### Oils and Greases

ASTM Oil No. 1	1
ASTM Oil No. 3	1
Laitance	2
Hydraulic oils	depends on consistency/additives
Motor oil	1
Formwork oil	1
High performance grease	1-2
Railroad switch lubricant	1-2

#### Acids and Bases

Formic acid 5 %	3
Acetic acid 5 %	2
Phosphoric acid 5 %	1
Nitic acid 5 %	4
Hydrochloric acid 5 %	1
Sulphuric acid 5 %	1
Ammonia solution 5 %	1
Caustic potash solution 5 %	1
Caustic soda solution 5 %	1

#### Solvents

#### SL-030 to SL-300

Acetone	4
Diesel/Fuel oil	2
Carburetor fuel/Benzine	3
Glycerin	1
Glycols	1-2
Cleaning solvents/Hexane	1
Methanol	3
Aromatic hydrocarbons	4

#### Other Factors

Hydrolysis *	1
Ozone	1
UV radiation and weathering	1-2
Biological resistance	1

\* 28 days, 158 °F, 95 % relative humidity



## Sample Pads and Kits

### Sample Kits

Part Number	Description	Dimensions
250-0800	SL-030-12 Sample Kit	1.97 x 1.97 in / 2.78 x 2.78 in / 3.94 x 3.94 in x 0.49 in
250-0801	SL-030-25 Sample Kit	1.97 x 1.97 in / 2.78 x 2.78 in / 3.94 x 3.94 in x 0.49 in
250-0802	SL-100-12 Sample Kit	1.97 x 1.97 in / 2.78 x 2.78 in / 3.94 x 3.94 in x 0.49 in
250-0803	SL-100-25 Sample Kit	1.97 x 1.97 in / 2.78 x 2.78 in / 3.94 x 3.94 in x 0.49 in
250-0804	SL-300-12 Sample Kit	1.97 x 1.97 in / 2.78 x 2.78 in / 3.94 x 3.94 in x 0.49 in
250-0805	SL-300-25 Sample Kit	1.97 x 1.97 in / 2.78 x 2.78 in / 3.94 x 3.94 in x 0.49 in
250-0806	SL-170-12/25 Sample Kit	8.66 in x 5.91 in x 0.49 in & 0.98 in
250-0807	SL-210-12/25 Sample Kit	8.66 in x 5.91 in x 0.49 in & 0.98 in
250-0808	SL-275-12/25 Sample Kit	8.66 in x 5.91 in x 0.49 in & 0.98 in
250-0809	SL-450-12/25 Sample Kit	8.66 in x 5.91 in x 0.49 in & 0.98 in
250-0810	SL-600-12/25 Sample Kit	8.66 in x 5.91 in x 0.49 in & 0.98 in
250-0811	SL-720-12/25 Sample Kit	8.66 in x 5.91 in x 0.49 in & 0.98 in

### Additional Information

50 x 50 mm, 70.7 x 70.7 mm, 100 x 100 mm kits include 1 sample each of the MP1, MP2 and MP3.  
 220 mm x 150 mm x 12.5 mm & 25 mm kits include 1 sample each of the 12 and 25 MP4.

### Shock Absorption Samples (Sold Separately)

Part Number	Description	Dimensions
SL-030-12-D-MP1	SL-030-12-D-MP1	1.97 in x 1.97 in
SL-030-12-D-MP2	SL-030-12-D-MP2	2.78 in x 2.78 in
SL-030-12-D-MP3	SL-030-12-D-MP3	3.94 in x 3.94 in
SL-030-12-D-MP4	SL-030-12-D-MP4	8.66 in x 5.91 in
	SL-030-12-D-MP4-V+K*	8.66 in x 5.91 in
SL-030-12-D-MP5	SL-030-12-D-MP5	59.06 in x 31.50 in
SL-030-25-D-MP1	SL-030-25-D-MP1	1.97 in x 1.97 in
SL-030-25-D-MP2	SL-030-25-D-MP2	2.78 in x 2.78 in
SL-030-25-D-MP3	SL-030-25-D-MP3	3.94 in x 3.94 in
SL-030-25-D-MP4	SL-030-25-D-MP4	8.66 in x 5.91 in
SL-030-25-D-MP5	SL-030-25-D-MP5	59.06 in x 31.50 in
SL-100-12-D-MP1	SL-100-12-D-MP1	1.97 in x 1.97 in
SL-100-12-D-MP2	SL-100-12-D-MP2	2.78 in x 2.78 in
SL-100-12-D-MP3	SL-100-12-D-MP3	3.94 in x 3.94 in
SL-100-12-D-MP4	SL-100-12-D-MP4	8.66 in x 5.91 in
	SL-100-12-D-MP4-V+K*	7.87 in x 5.91 in
SL-100-12-D-MP5	SL-100-12-D-MP5	59.06 in x 31.50 in
SL-100-25-D-MP1	SL-100-25-D-MP1	1.97 in x 1.97 in
SL-100-25-D-MP2	SL-100-25-D-MP2	2.78 in x 2.78 in
SL-100-25-D-MP3	SL-100-25-D-MP3	3.94 in x 3.94 in
SL-100-25-D-MP4	SL-100-25-D-MP4	8.66 in x 5.91 in
SL-100-25-D-MP5	SL-100-25-D-MP5	59.06 in x 31.50 in
SL-300-12-D-MP1	SL-300-12-D-MP1	1.97 in x 1.97 in
SL-300-12-D-MP2	SL-300-12-D-MP2	2.78 in x 2.78 in
SL-300-12-D-MP3	SL-300-12-D-MP3	3.94 in x 3.94 in
SL-300-12-D-MP4	SL-300-12-D-MP4	8.66 in x 5.91 in
	SL-300-12-D-MP4-V+K*	7.87 in x 5.91 in
SL-300-12-D-MP5	SL-300-12-D-MP5	59.06 in x 31.50 in
SL-300-25-D-MP1	SL-300-25-D-MP1	1.97 in x 1.97 in
SL-300-25-D-MP2	SL-300-25-D-MP2	2.78 in x 2.78 in
SL-300-25-D-MP3	SL-300-25-D-MP3	3.94 in x 3.94 in
SL-300-25-D-MP4	SL-300-25-D-MP4	8.66 in x 5.91 in
SL-300-25-D-MP5	SL-300-25-D-MP5	59.06 in x 31.50 in

\* Has a layer for wear protection & adhesive on one side

### Vibration Isolation Samples (Sold Separately)

Part Number	Description	Dimensions
SL-170-12-F-MP4	SL-170-12-F-MP4	8.66 in x 5.91 in
SL-170-25-F-MP4	SL-170-25-F-MP4	8.66 in x 5.91 in
SL-210-12-F-MP4	SL-210-12-F-MP4	8.66 in x 5.91 in
SL-210-25-F-MP4	SL-210-25-F-MP4	8.66 in x 5.91 in
SL-275-12-F-MP4	SL-275-12-F-MP4	8.66 in x 5.91 in
SL-275-25-F-MP4	SL-275-25-F-MP4	8.66 in x 5.91 in
SL-450-12-F-MP4	SL-450-12-F-MP4	8.66 in x 5.91 in
SL-450-25-F-MP4	SL-450-25-F-MP4	8.66 in x 5.91 in
SL-600-12-F-MP4	SL-600-12-F-MP4	8.66 in x 5.91 in
SL-600-25-F-MP4	SL-600-25-F-MP4	8.66 in x 5.91 in
SL-720-12-F-MP4	SL-720-12-F-MP4	8.66 in x 5.91 in
SL-720-25-F-MP4	SL-720-25-F-MP4	8.66 in x 5.91 in

# Application Examples


## SL-030, TA

### Damping combination SLAB and TUBUS

SLAB-TUBUS-Combination ensures fast luggage transport. Airports strive to shorten air passengers' waiting times as much as possible. This goal is met with a solution specially developed for luggage transport systems and has solved previous damping issues. Transport carriers with a weight of up to 265 lbs can now be moved at the desired conveyor belt speeds. A SLAB-combination of the material SL-030-12(25) together with two TA40-16 type TUBUS profile dampers are used here.



Fast luggage transport for airport customers

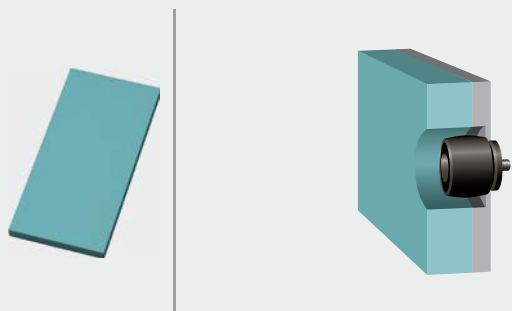


## SL-030

### Noise reduction

ACE-SLAB damping pads protect man and machine. At the beginning of the construction phase of a modern processing center at the end position, a 55 lb cable channel collided with force against the housing and produced a deafening noise and mechanical strain on the energy chain. A reliable solution for compliance with the operational parameters was realized with the SL-030-25 ACE-SLAB damping pads even before the milling machine was finished.




Low-noise energy chain

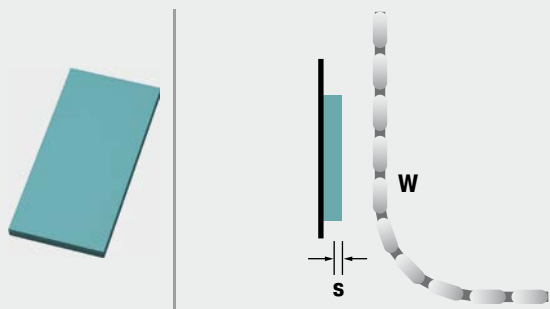


### SL-030

#### Impact reduction in ring form

ACE-SLAB damping pads make tire transport safer. Developed for absorbing the impact of forces, the ACE-SLAB damping pads SL-030-121 applied in this tire testing system are ideal for protecting the sliding parts of the machine during quality tests. The individual customization of the ring form of the center arm and simple integration into the equipment also support the decision for applying these innovative absorber elements.

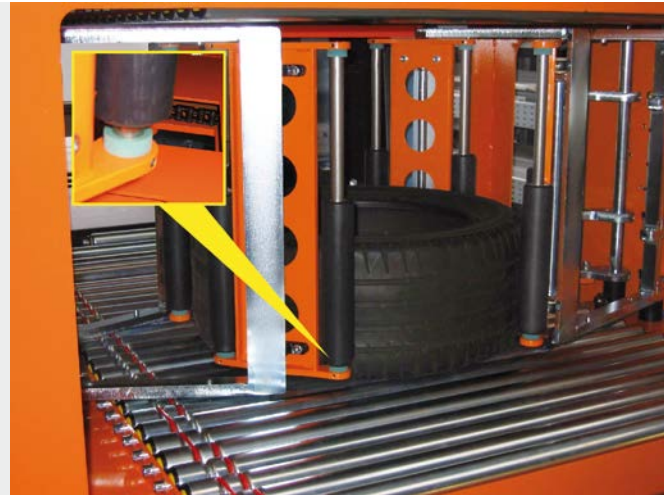

Perfectly fitted machine protection  
SDS Systemtechnik GmbH, 75365 Calw, Germany

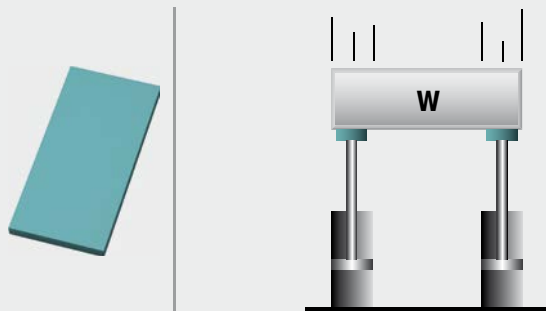


### SL-030

#### Impact protection for large areas

ACE-SLAB damping pads offer impact protection for wooden battens. To protect wooden battens with differing weights and impact speeds of approx. 6.5 in/s, the SLAB-material SL-030-12 was screwed across the whole surface between two steel sheets in this application. This creates an even damping effect over the whole impact area, which protects the impact surfaces of the battens from an excessive impact load. The minimisation of recoil as well as reduction of noise are further positive side effects of this construction.



Impact protection for wooden battens

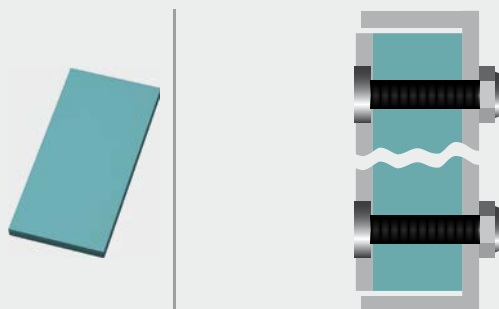

# Motion Control

Gas Springs – Push Type, Gas Springs – Pull Type  
Hydraulic Dampers, Hydraulic Feed Controls  
Rotary Dampers



# Custom Control of Hand Forces

## Customized to suit your applications

**The ACE products in this segment enhance the quality of any type of movement. Anyone who wants to raise or lower loads, regulate the feed of an object to the precise millimeter or gently decelerate rotating or linear movements will find the right solution here.**

ACE delivers industry leading quality. Our innovative solutions correspond with stringent requirements for ergonomics and individuality, including custom pressurized gas springs.



# Industrial Gas Springs – Push Type

## The smart way to lift and lower

**Anyone who wants to lift or lower loads with control and without excessive strength relies on the industrial gas springs from ACE. These maintenance-free, ready-to-install machine elements, which are available from stock, support sheer muscle power, reliably open and hold.**

Available with body diameters of 0.31" to 2.76" (8 to 70 mm) and forces from 2 to 2,925 lbs. (10 to 13,000 N), ACE push type gas springs offer a huge variety and maximum service life. The first is achieved thanks to the number of available connections and fittings for simple attachment and the latter with high quality design and materials. Whether they are made of steel or stainless steel, these components make any work easier and are also visually appealing.

Ready-to-install and universally applicable

Modular end fittings and mounting brackets

Calculation program for individual design

Standard with fill/DE-Gas valve

Maintenance-free

Large variety in stock




## Function of a Gas Spring – Push Type

ACE gas springs are individually filled to a predetermined pressure to suit a customer's requirement (extension Force  $F_1$ ). The cross-sectional area of the piston rod and filling pressure determines the extension force.

During the compression of the piston rod, nitrogen flows through an orifice in the piston from the full bore side of the piston to the annulus. The nitrogen is compressed by the volume of the piston rod. As the piston rod is compressed the pressure increases, so increasing the reaction force (progression). The force depends on the proportional relationship between the piston rod and the inner tube diameter, which is approximately linear.

### Calculation Principles

#### Force-Stroke Characteristics of Gas Spring (Push Type)

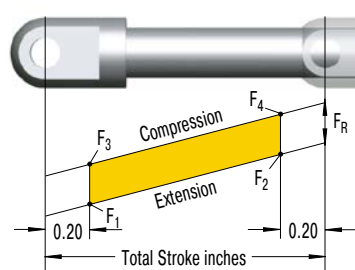

$F_1$  = nominal force at 68 °F  
(this is the pressure figure normally used when specifying the gas spring)

$F_2$  = force in the complete compressed position

When compressing the piston rod, there is an additional friction force caused by the contact pressure of the seals (this **only** occurs **during the compression stroke**):

$F_3$  = force at the beginning of the compression stroke

$F_4$  = force at the end of the compression stroke

Free  
calculation service  
see page 188!

#### Gas Springs (Push Type)

TYPES	Progression approx. %	<sup>1</sup> Friction $F_R$ approx. in lbs
GS-8	29 - 33 <sup>2</sup>	2.25
GS-10	13 - 16 <sup>2</sup>	2.25
GS-12	20 - 35 <sup>2</sup>	4.50
GS-15	30 - 40 <sup>2</sup>	4.50
GS-19	24 - 35 <sup>2</sup>	6.74
GS-22	30 - 40 <sup>2</sup>	6.74
GS-28	63 - 76 <sup>2</sup>	8.99
GS-40	38 - 50 <sup>2</sup>	11.24
GS-70	25	11.24

<sup>1</sup> Depending on the filling force

<sup>2</sup> Depending on the stroke

**Progression:** (the slope of the force line in the diagram above) is due to the reduction of the internal gas volume as the piston rod moves from its initial position to its fully stroked position. The approx. progression values given above for standard springs can be altered on request.

**Effect of temperature:** The nominal  $F_1$  figure is given at 68 °F. An increase of 50 °F will increase force by 3.4 %.

**Filling tolerances:** -4.50 lbs to +8.99 lbs or 5 % to 7 %. Depending on size and extension force the tolerances can differ.

## Industrial Gas Springs – Push Type



### GS-8 to GS-70

Valve Technology

**Individual stroke length and extension forces**

Hoods, Shutters, Machine housing, Conveyor systems

Page 150



### GS-8-V4A to GS-40-VA

Valve Technology, Stainless Steel

**With food grade oil for FDA compliance**

Hoods, Shutters, Machine housing, Conveyor systems

Page 160



### GST-40 Tandem

Valve Technology

**Optimized dual force for heavy flaps and wide angle applications**

Hoods, Shutters, Machine housing, Conveyor systems

Page 170

## GS-8 to GS-70

### Individual stroke length and extension forces

#### Valve Technology


**Extension force 2 lbs to 2,923 lbs**

**Stroke 0.79 in to 39.37 in**

Universal and tailor made: ACE industrial gas springs offer perfect support of muscle power with forces from 2 to 2,923 lbs. (10 to 13,000 N) with body diameter of 0.31" to 2.76" (8 to 70 mm). These durable and sealed systems are ready for installation, maintenance-free and filled with pressurized nitrogen gas.

They are filled according to individual customer pressure requirements and may be adjusted later by use of a built-in valve. ACE provides free calculation support and designs the gas springs with mounting points specifically for the particular application. A variety of accessories makes assembly even easier and allows universal application of the gas springs.

ACE industrial gas push type springs are used on covers, lids, or other components. They are used in industrial applications, automation and machine building, medical technology as well as in the electronics, automobile and furniture industries.

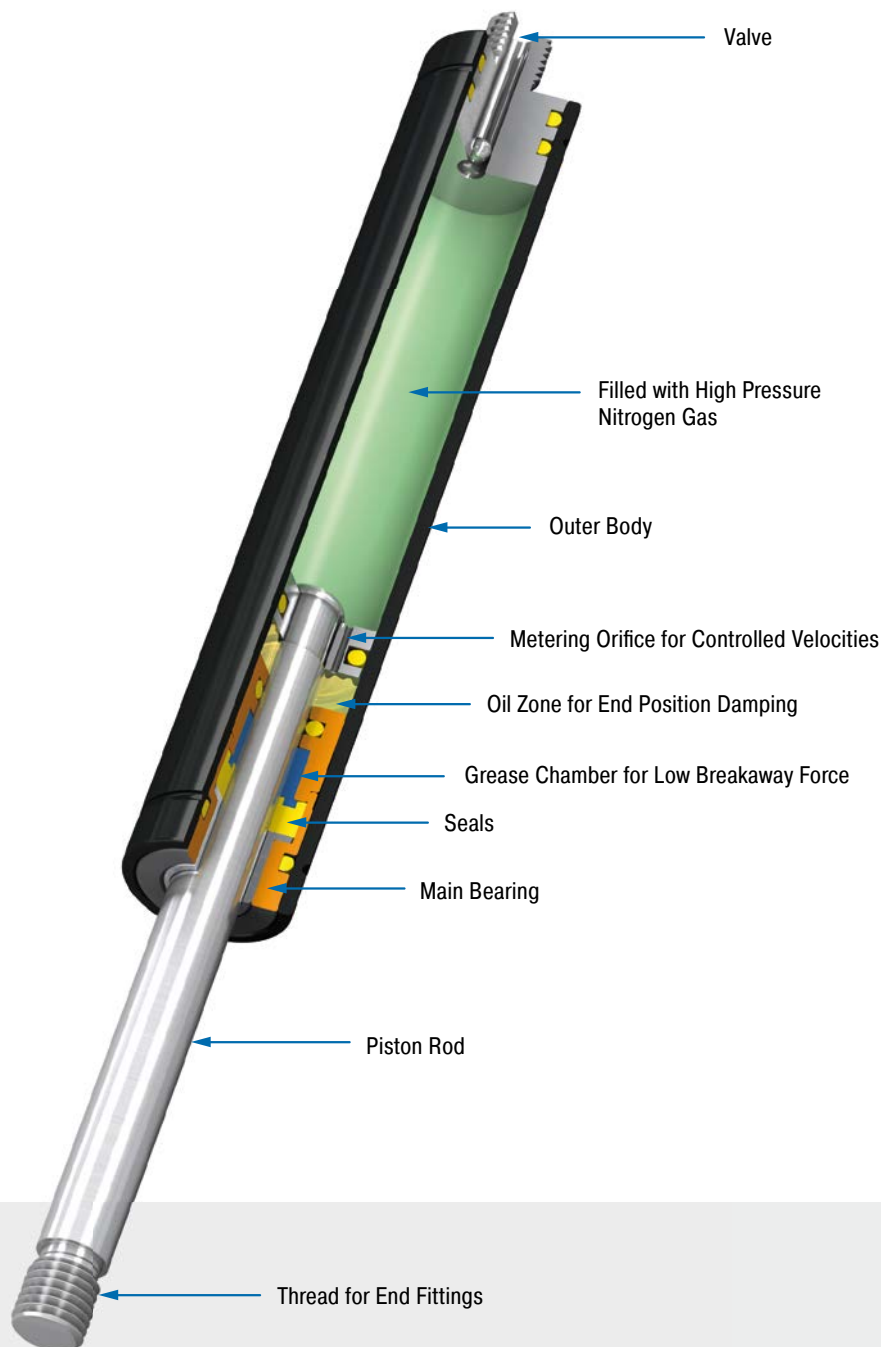

#### Technical Data

**Extension force:** 2 lbs to 2,923 lbs

**Piston rod diameter:** Ø 0.12 in to Ø 1.18 in

**Progression:** Approx. 13 % to 76 % (depending on size and stroke)

**Lifetime:** Approx. 250,000 cycles

**Operating temperature range:** -4 °F to 176 °F

**Material:** Outer body: Coated steel; Piston rod: Steel or stainless steel with wear-resistant coating; End fittings: Zinc plated steel

**Operating fluid:** Nitrogen gas and oil

**Mounting:** We recommend mounting with piston rod downwards to take advantage of the built-in end position damping.

**End position damping length:** Approx. 20 % to 67 % (depending on size and stroke)

**Positive stop:** External positive stop at the end of stroke provided by the customer.

**Application field:** Hoods, Shutters, Machine housing, Conveyor systems, Control boxes, Furniture industry, Jacking applications, Assembly stations, Vehicle technology, Folding elements

**Note:** Increased break-away force if unit has not moved for some time.

**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

**Safety information:** Gas springs (push type) should not be installed under pre-tension.

**On request:** Special oils and other special options. Alternative accessories. Different end position damping and extension speed.




Valve Technology , Extension force 2 lbs to 22 lbs (compressed up to 30 lbs)

### End Fitting

### Standard Dimensions


### End Fitting

**A3.5**

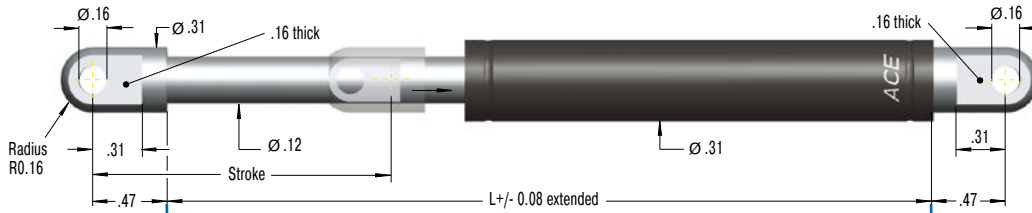


**Eye A3.5**  
max. force 83 lbs

**B3.5**




**Stud Thread B3.5**

**C3.5**




**Angle Ball Joint C3.5**  
max. force 83 lbs

**D3.5**




**Clevis Fork D3.5**  
max. force 83 lbs

**E3.5**




**Swivel Eye E3.5**  
max. force 83 lbs

**G3.5**



**Ball Socket G3.5**  
max. force 83 lbs

**Rod Shroud W3.5-8**



### Performance and Dimensions

TYPES	Stroke inch	L extended inch	Extension force max. lbs
GS-8-20	0.79	2.83	22
GS-8-30	1.18	3.62	22
GS-8-40	1.57	4.41	22
GS-8-50	1.97	5.20	22
GS-8-60	2.36	5.98	22
GS-8-80	3.14	7.56	22

### Ordering Example

**GS-8-30-AC-30**

Type (Push Type) \_\_\_\_\_  
 Body 0.31" (8 mm) \_\_\_\_\_  
 Stroke 1.18" (30 mm) \_\_\_\_\_  
 Piston Rod End Fitting A3.5 \_\_\_\_\_  
 Body End Fitting C3.5 \_\_\_\_\_  
 Nominal Force F<sub>1</sub> 7 lbs (30 N) \_\_\_\_\_


Mounting accessories see from page 212.

**Adjuster Knob DE-GAS-3.5**

See page 191.

### Technical Data

- Extension force:** 2 lbs to 22 lbs (compressed up to 30 lbs)
- Progression:** Approx. 29 % to 33 %
- Operating temperature range:** -4 °F to 176 °F
- Material:** Outer body: Coated steel; Piston rod: Stainless steel (1.4301/1.4305, AISI 304/303); End fittings: Zinc plated steel
- Mounting:** We recommend mounting with piston rod downwards to take advantage of the built-in end position damping.
- End position damping length:** approx. 0.2" (depending on the stroke)
- Positive stop:** External positive stop at the end of stroke provided by the customer.
- Note:** Increased break-away force if unit has not moved for some time.
- End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.
- Safety information:** Gas springs (push type) should not be installed under pre-tension.

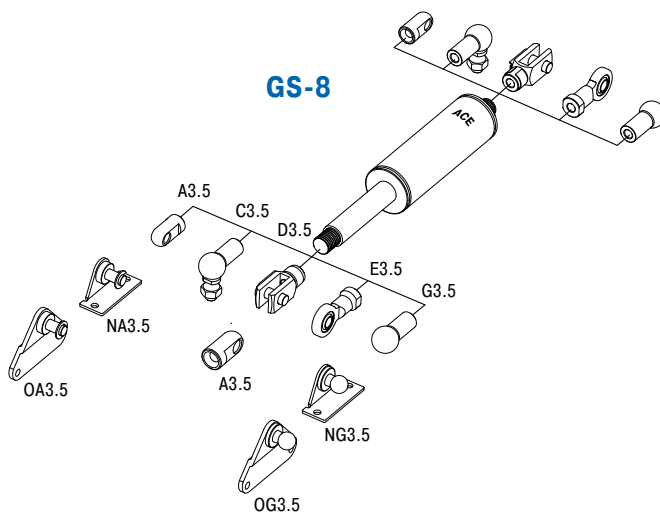


Valve Technology, Extension force 2 lbs to 22 lbs (compressed up to 26 lbs)

End Fitting

Standard Dimensions


End Fitting

A3.5

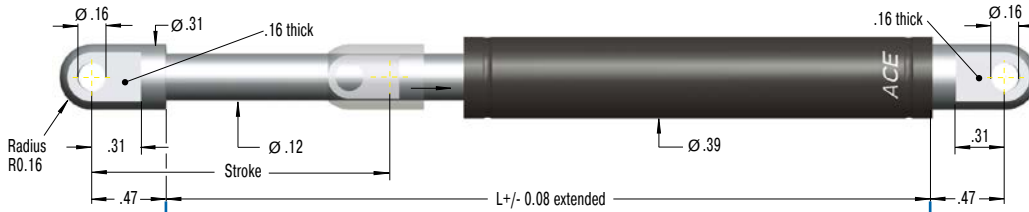


Eye A3.5  
max. force 83 lbs

B3.5




Stud Thread B3.5

C3.5




Angle Ball Joint C3.5  
max. force 83 lbs

D3.5




Clevis Fork D3.5  
max. force 83 lbs

E3.5




Swivel Eye E3.5  
max. force 83 lbs

G3.5



Ball Socket G3.5  
max. force 83 lbs

Rod Shroud  
W3.5-10




Performance and Dimensions

TYPES	Stroke inch	L extended inch	Extension force max. lbs
GS-10-20	0.79	2.83	22
GS-10-30	1.18	3.62	22
GS-10-40	1.57	4.41	22
GS-10-50	1.97	5.20	22
GS-10-60	2.36	5.98	22
GS-10-80	3.15	7.56	22


Ordering Example

Type (Push Type) → **GS-10-80-AC-60**  
 Body 0.39" (10 mm) → **GS-10-80-AC-60**  
 Stroke 3.15" (80 mm) → **GS-10-80-AC-60**  
 Piston Rod End Fitting A3.5 → **GS-10-80-AC-60**  
 Body End Fitting C3.5 → **GS-10-80-AC-60**  
 Nominal Force F<sub>1</sub> 13 lbs (60 N) → **GS-10-80-AC-60**

Mounting accessories see from page 212.



Adjuster Knob  
DE-GAS-3.5  
See page 191.

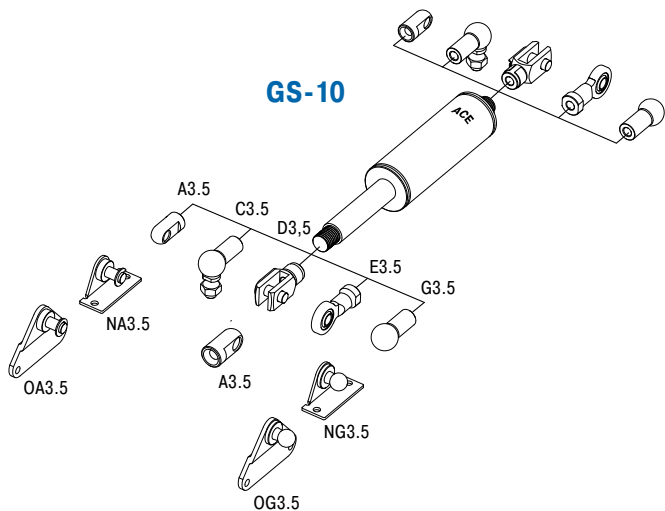

Technical Data

**Extension force:** 2 lbs to 22 lbs (compressed up to 26 lbs)

**Progression:** Approx. 13 % to 16 %

**Operating temperature range:** -4 °F to 176 °F

**Material:** Outer body: Coated steel; Piston rod: Stainless steel (1.4301/1.4305, AISI 304/303); End fittings: Zinc plated steel

**Mounting:** We recommend mounting with piston rod downwards to take advantage of the built-in end position damping.

**End position damping length:** approx. 0.2" (depending on the stroke)

**Positive stop:** External positive stop at the end of stroke provided by the customer.

**Note:** Increased break-away force if unit has not moved for some time.

**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

**Safety information:** Gas springs (push type) should not be installed under pre-tension.


Valve Technology, Extension force 3 lbs to 40 lbs (compressed up to 55 lbs)

### End Fitting

### Standard Dimensions


### End Fitting

**A3.5**

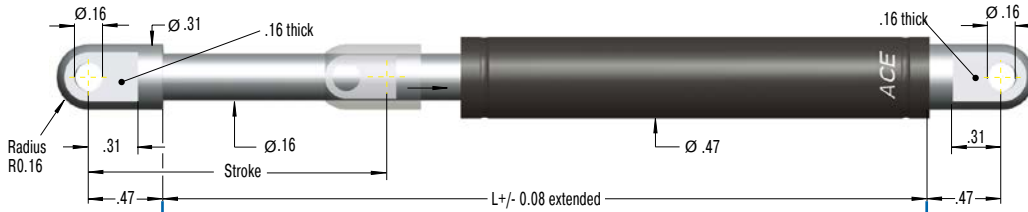


**Eye A3.5**  
max. force 83 lbs

**B3.5**




**Stud Thread B3.5**

**C3.5**




**Angle Ball Joint C3.5**  
max. force 83 lbs

**D3.5**




**Clevis Fork D3.5**  
max. force 83 lbs

**E3.5**




**Swivel Eye E3.5**  
max. force 83 lbs

**G3.5**



**Ball Socket G3.5**  
max. force 83 lbs

**Rod Shroud W3.5-12**



### Performance and Dimensions

TYPES	Stroke inch	L extended inch	Extension force max. lbs
GS-12-20	0.79	2.83	40
GS-12-30	1.18	3.62	40
GS-12-40	1.57	4.41	40
GS-12-50	1.97	5.20	40
GS-12-60	2.36	5.98	40
GS-12-80	3.15	7.56	34
GS-12-100	3.94	9.13	34
GS-12-120	4.72	10.71	27
GS-12-150	5.91	13.07	22

### Ordering Example

**GS-12-100-AA-30**

Type (Push Type) \_\_\_\_\_  
 Body 0.47" (12 mm) \_\_\_\_\_  
 Stroke 3.94" (100 mm) \_\_\_\_\_  
 Piston Rod End Fitting A3.5 \_\_\_\_\_  
 Body End Fitting A3.5 \_\_\_\_\_  
 Nominal Force F<sub>1</sub> 7 lbs (30 N) \_\_\_\_\_


Mounting accessories see from page 212.

**Adjuster Knob DE-GAS-3.5**

See page 191.

### Technical Data

- Extension force:** 3 lbs to 40 lbs (compressed up to 55 lbs)
- Progression:** Approx. 20 % to 35 %
- Operating temperature range:** -4 °F to 176 °F
- Material:** Outer body: Coated steel; Piston rod: Stainless steel (1.4301/1.4305, AISI 304/303); End fittings: Zinc plated steel
- Mounting:** We recommend mounting with piston rod downwards to take advantage of the built-in end position damping.
- End position damping length:** approx. 0.39" (depending on the stroke)
- Positive stop:** External positive stop at the end of stroke provided by the customer.
- Note:** Increased break-away force if unit has not moved for some time.
- End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.
- Safety information:** Gas springs (push type) should not be installed under pre-tension.

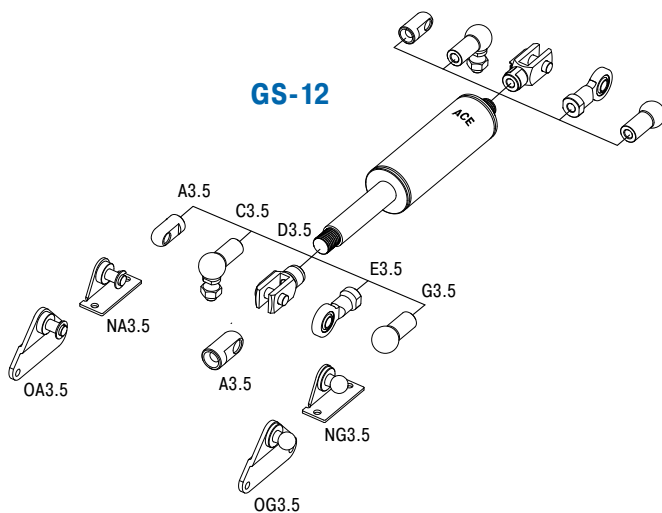


Valve Technology, Extension force 9 lbs to 90 lbs (compressed up to 126 lbs)

End Fitting

Standard Dimensions

End Fitting

A5

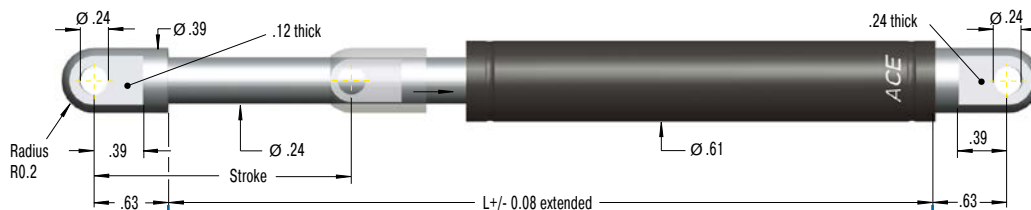

Eye A5  
max. force 180 lbs

B5

C5

D5

E5

F5

G5

Rod Shroud  
W5-15

Performance and Dimensions

TYPES	Stroke inch	L extended inch	Extension force max. lbs
GS-15-20	0.79	2.64	90
GS-15-40	1.57	4.21	90
GS-15-50	1.97	5.00	90
GS-15-60	2.36	5.79	90
GS-15-80	3.15	7.36	90
GS-15-100	3.94	8.94	90
GS-15-120	4.72	10.51	90
GS-15-150	5.91	12.87	90
GS-15-200	7.87	16.81	79

Ordering Example

Type (Push Type) \_\_\_\_\_  
 Body 0.61" (15.6 mm) \_\_\_\_\_  
 Stroke 5.91" (150 mm) \_\_\_\_\_  
 Piston Rod End Fitting A5 \_\_\_\_\_  
 Body End Fitting C5 \_\_\_\_\_  
 Nominal Force F<sub>1</sub> 34 lbs (150 N) \_\_\_\_\_

**GS-15-150-AC-150**

Mounting accessories see from page 212.

Adjuster Knob  
**DE-GAS-5**  
See page 191.

Stud Thread B5


Angle Ball Joint C5  
max. force 112 lbs

Clevis Fork D5  
max. force 180 lbs

Swivel Eye E5  
max. force 180 lbs

Inline Ball Joint F5  
max. force 112 lbs

Ball Socket G5  
max. force 112 lbs

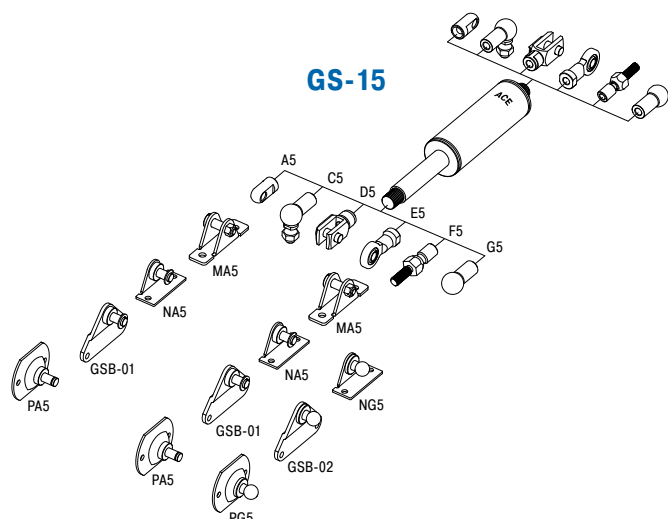

Technical Data

- Extension force:** 9 lbs to 90 lbs (compressed up to 126 lbs)
- Progression:** Approx. 30 % to 40 %
- Operating temperature range:** -4 °F to 176 °F
- Material:** Outer body: Steel coated with UV paint; Piston rod: Steel with wear-resistant coating; End fittings: Zinc plated steel
- Mounting:** We recommend mounting with piston rod downwards to take advantage of the built-in end position damping.
- End position damping length:** approx. 0.39" (depending on the stroke)
- Positive stop:** External positive stop at the end of stroke provided by the customer.
- Note:** Increased break-away force if unit has not moved for some time.
- End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.
- Safety information:** Gas springs (push type) should not be installed under pre-tension.


Valve Technology, Extension force 11 lbs to 157 lbs (compressed up to 212 lbs)

### End Fitting

### Standard Dimensions

### End Fitting


**A8**

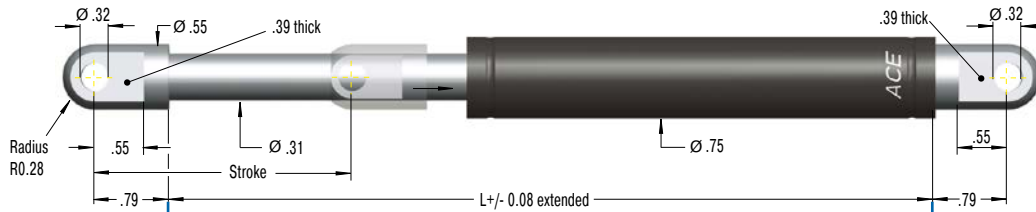

**Eye A8**


max. force 674 lbs

**B8**



**Stud Thread B8**

**C8**




**Angle Ball Joint C8**

max. force 270 lbs

Also available with UNF thread 5/16-18.

Order G5/16.


**D8**



**Clevis Fork D8**

max. force 674 lbs


**E8**



**Swivel Eye E8**

max. force 674 lbs


**F8**



**Inline Ball Joint F8**

max. force 270 lbs


**G8**



**Ball Socket G8**

max. force 270 lbs

**Rod Shroud W8-19**



**Adjuster Knob DE-GAS-8**

See page 191.

### Performance and Dimensions

TYPES	Stroke inch	L extended inch	Extension force max. lbs
GS-19-50	1.97	6.46	157
GS-19-100	3.94	10.39	157
GS-19-150	5.91	14.33	157
GS-19-200	7.87	18.28	157
GS-19-250	9.84	22.20	135
GS-19-300	11.81	26.14	101

### Ordering Example

**GS-19-150-AC-600**

Type (Push Type) \_\_\_\_\_  
 Body 0.75" (19 mm) \_\_\_\_\_  
 Stroke 5.91" (150 mm) \_\_\_\_\_  
 Piston Rod End Fitting A8 \_\_\_\_\_  
 Body End Fitting C8 \_\_\_\_\_  
 Nominal Force F<sub>1</sub> 135 lbs (600 N) \_\_\_\_\_

Mounting accessories see from page 212.

### Technical Data

**Extension force:** 11 lbs to 157 lbs (compressed up to 212 lbs)

**Progression:** Approx. 24 % to 35 %

**Operating temperature range:** -4 °F to 176 °F

**Material:** Outer body: Steel coated with UV paint; Piston rod: Steel with wear-resistant coating; End fittings: Zinc plated steel

**Mounting:** In any position. Hint: We recommend mounting with piston rod downwards to take advantage of the built-in end position damping.

**End position damping length:** approx. 0.79" to 2.36" (depending on the stroke)


**Positive stop:** External positive stop at the end of stroke provided by the customer.

**Note:** Integrated grease chamber reduces friction and wear and optimizes lubrication.

**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

**Safety information:** Gas springs (push type) should not be installed under pre-tension.

### GS-19

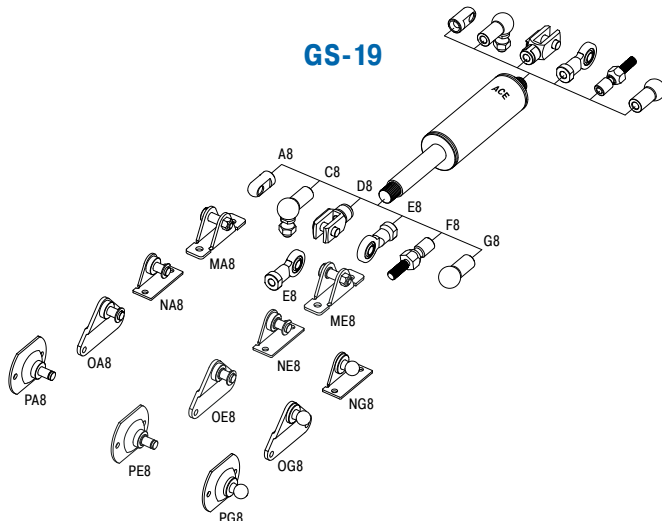


Valve Technology, Extension force 18 lbs to 292 lbs (compressed up to 409 lbs)

End Fitting

Standard Dimensions

End Fitting

A8

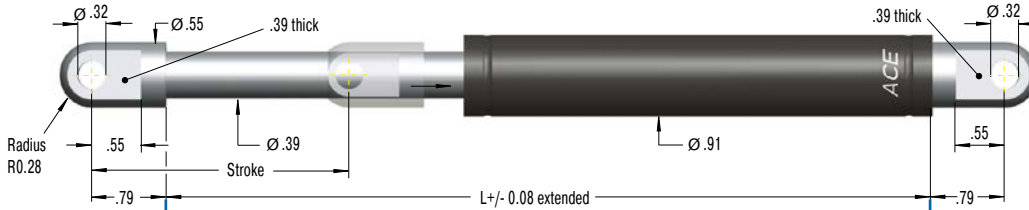

Eye A8  
max. force 674 lbs

B8

C8


D8

E8

F8

G8

Rod Shroud  
W8-22

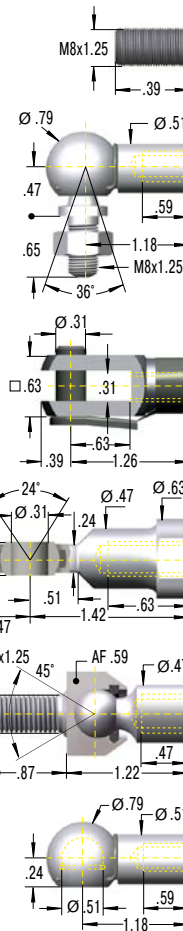

Performance and Dimensions

TYPES	Stroke inch	L extended inch	Extension force max. lbs
GS-22-50	1.97	6.46	292
GS-22-100	3.94	10.39	292
GS-22-150	5.91	14.33	292
GS-22-200	7.87	18.28	292
GS-22-250	9.84	22.20	292
GS-22-300	11.81	26.14	247
GS-22-350	13.78	30.08	191
GS-22-400	15.75	34.02	146
GS-22-450	17.72	37.95	124
GS-22-500	19.69	41.89	101
GS-22-550	21.65	45.83	90
GS-22-600	23.62	49.76	79
GS-22-650	25.59	53.70	67
GS-22-700	27.56	57.64	56

Ordering Example

Type (Push Type) \_\_\_\_\_  
 Body 0.91" (23 mm) \_\_\_\_\_  
 Stroke 5.91" (150 mm) \_\_\_\_\_  
 Piston Rod End Fitting A8 \_\_\_\_\_  
 Body End Fitting E8 \_\_\_\_\_  
 Nominal Force F<sub>1</sub> 180 lbs (800 N) \_\_\_\_\_

GS-22-150-AE-800

Mounting accessories see from page 212.

Adjuster Knob  
DE-GAS-8  
See page 191.

Technical Data

**Extension force:** 18 lbs to 292 lbs (compressed up to 409 lbs)

**Progression:** Approx. 30 % to 40 %

**Operating temperature range:** -4 °F to 176 °F

**Material:** Outer body: Steel coated with UV paint; Piston rod: Steel with wear-resistant coating; End fittings: Zinc plated steel

**Mounting:** In any position. Hint: We recommend mounting with piston rod downwards to take advantage of the built-in end position damping.


**End position damping length:** approx. 0.79" to 2.76" (depending on the stroke)

**Positive stop:** External positive stop at the end of stroke provided by the customer.

**Note:** Integrated grease chamber reduces friction and wear and optimizes lubrication.

**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

**Safety information:** Gas springs (push type) should not be installed under pre-tension.

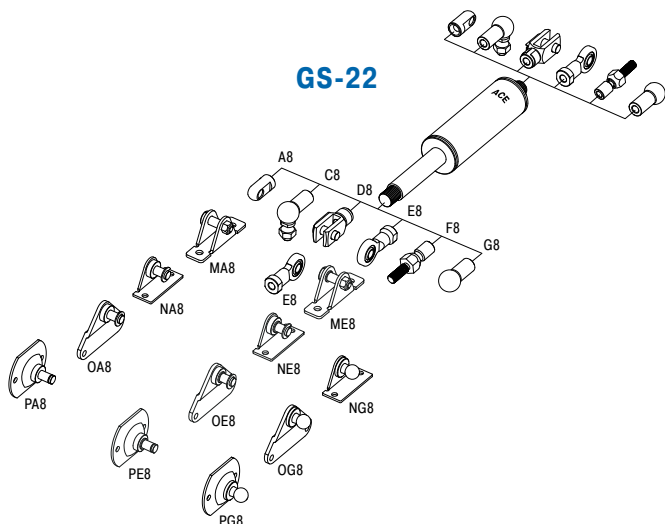


Valve Technology, Extension force 34 lbs to 562 lbs (compressed up to 989 lbs)

### End Fitting

### Standard Dimensions

### End Fitting

**A10**

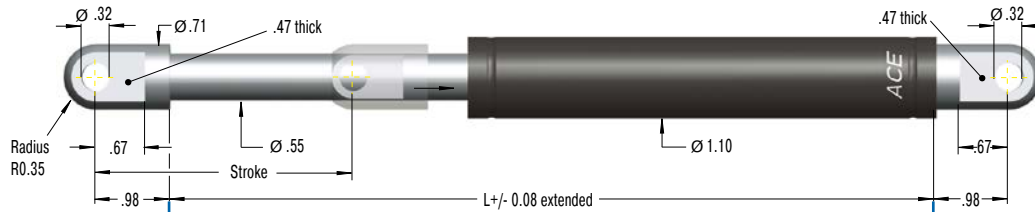


**Eye A10**  
max. force 2,248 lbs

**B10**




**Stud Thread B10**

**C10**




**Angle Ball Joint C10**  
max. force 405 lbs

**D10**




**Clevis Fork D10**  
max. force 2,248 lbs

**E10**




**Swivel Eye E10**  
max. force 2,248 lbs

**F10**



**Inline Ball Joint F10**  
max. force 405 lbs

**Rod Shroud W10-28**



**Adjuster Knob DE-GAS-10**  
See page 191.

### Performance and Dimensions

TYPES	Stroke inch	L extended inch	Extension force max. lbs
GS-28-100	3.94	10.31	562
GS-28-150	5.91	14.25	562
GS-28-200	7.87	18.19	562
GS-28-250	9.84	22.13	562
GS-28-300	11.81	26.06	562
GS-28-350	13.78	30.00	562
GS-28-400	15.75	33.94	540
GS-28-450	17.72	37.87	438
GS-28-500	19.69	41.81	360
GS-28-550	21.65	45.75	303
GS-28-600	23.62	49.69	259
GS-28-650	25.59	53.62	225
GS-28-700	27.56	57.56	202
GS-28-750	29.53	61.50	180

### Ordering Example

**GS-28-150-EE-1200**

Type (Push Type) \_\_\_\_\_  
 Body 1.1" (28 mm) \_\_\_\_\_  
 Stroke 5.91" (150 mm) \_\_\_\_\_  
 Piston Rod End Fitting E10 \_\_\_\_\_  
 Body End Fitting E10 \_\_\_\_\_  
 Nominal Force F<sub>1</sub> 270 lbs (1,200 N) \_\_\_\_\_

Mounting accessories see from page 212.

### Technical Data

**Extension force:** 34 lbs to 562 lbs (compressed up to 989 lbs)

**Progression:** Approx. 63 % to 76 %

**Operating temperature range:** -4 °F to 176 °F

**Material:** Outer body: Steel coated with UV paint; Piston rod: Steel with wear-resistant coating; End fittings: Zinc plated steel

**Mounting:** In any position. Hint: We recommend mounting with piston rod downwards to take advantage of the built-in end position damping.


**End position damping length:** approx. 1.18" to 2.76" (depending on the stroke)

**Positive stop:** External positive stop at the end of stroke provided by the customer.

**Note:** Integrated grease chamber reduces friction and wear and optimizes lubrication.

**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

**Safety information:** Gas springs (push type) should not be installed under pre-tension.

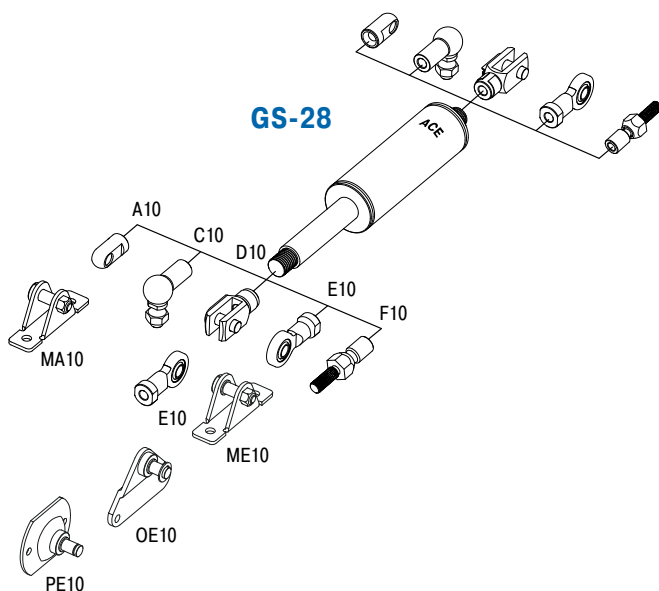


Valve Technology, Extension force 112 lbs to 1,124 lbs (compressed up to 1,686 lbs)

End Fitting

Standard Dimensions

End Fitting

A14

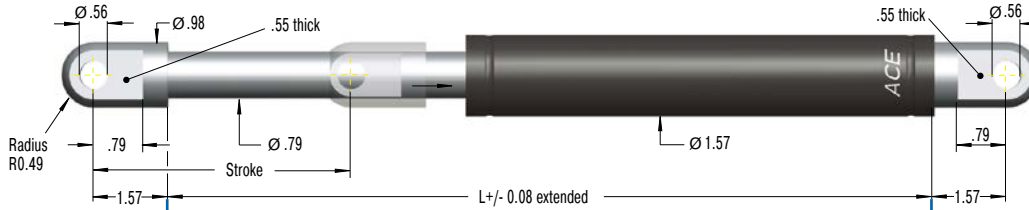

Eye A14  
max. force 2,248 lbs

B14


C14

D14

E14

F14

Rod Shroud  
W14-40

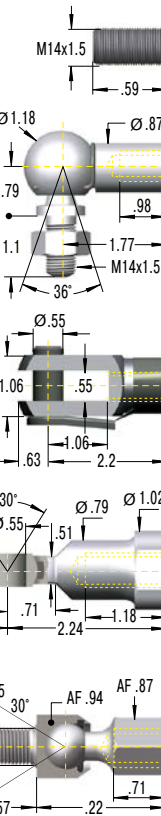

Performance and Dimensions

TYPES	Stroke inch	L extended inch	Extension force max. lbs
GS-40-100	3.94	12.48	1,124
GS-40-150	5.91	16.42	1,124
GS-40-200	7.87	20.35	1,124
GS-40-250	9.84	24.29	1,124
GS-40-300	11.81	28.23	1,124
GS-40-400	15.75	36.10	1,124
GS-40-500	19.69	43.98	1,124
GS-40-600	23.62	51.85	933
GS-40-800	32.50	67.60	573
GS-40-1000	39.37	83.35	382

Ordering Example

GS-40-150-DD-3500

Type (Push Type) \_\_\_\_\_  
 Body 1.57" (40 mm) \_\_\_\_\_  
 Stroke 5.91" (150 mm) \_\_\_\_\_  
 Piston Rod End Fitting D14 \_\_\_\_\_  
 Body End Fitting D14 \_\_\_\_\_  
 Nominal Force F<sub>1</sub> 787 lbs (3,500 N) \_\_\_\_\_

Mounting accessories see from page 212.

Stud Thread B14



Angle Ball Joint C14  
max. force 719 lbs

Clevis Fork D14  
max. force 2,248 lbs

Swivel Eye E14  
max. force 2,248 lbs

Inline Ball Joint F14  
max. force 719 lbs

Adjuster Knob  
DE-GAS-14  
See page 191.

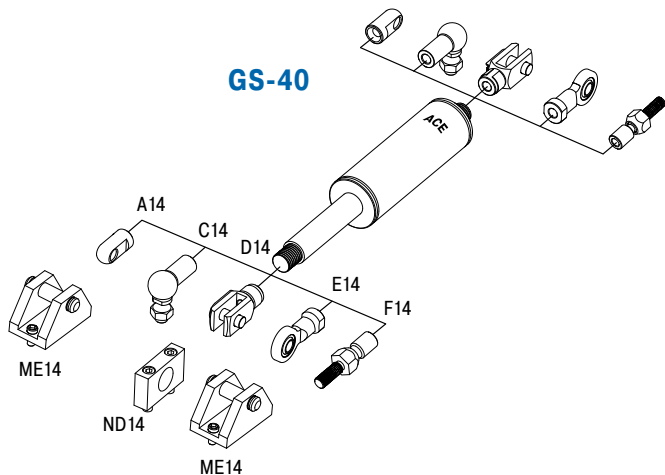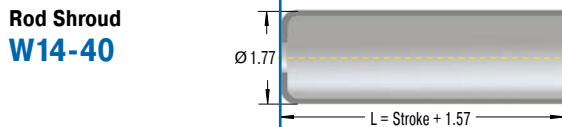

Technical Data

**Extension force:** 112 lbs to 1,124 lbs (compressed up to 1,686 lbs)

**Progression:** Approx. 38 % to 50 %

**Operating temperature range:** -4 °F to 176 °F

**Material:** Outer body: Steel coated with UV paint; Piston rod: Steel with wear-resistant coating; End fittings: Zinc plated steel

**Mounting:** In any position. Hint: We recommend mounting with piston rod downwards to take advantage of the built-in end position damping.

**End position damping length:** approx. 1.18" to 2.76" (depending on the stroke)

**Positive stop:** External positive stop at the end of stroke provided by the customer.

**Note:** Integrated grease chamber reduces friction and wear and optimizes lubrication.

**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

**Safety information:** Gas springs (push type) should not be installed under pre-tension.



Valve Technology, Extension force 450 lbs to 2,923 lbs (compressed up to 3,653 lbs)

### End Fitting

### Standard Dimensions

### End Fitting

**B24** Stud Thread **B24**

**D24** Clevis Fork **D24**  
max. force 11,240 lbs

**E24** Swivel Eye **E24**  
max. force 11,240 lbs

**Rod Shroud W24-70**

$L = \text{Stroke} + 5.12$

Performance and Dimensions			
TYPES	Stroke inch	L extended inch	Extension force max. lbs
GS-70-100	3.94	12.60	2,923
GS-70-200	7.87	20.47	2,923
GS-70-300	11.81	28.35	2,923
GS-70-400	15.75	36.22	2,923
GS-70-500	19.69	44.09	2,923
GS-70-600	23.62	51.97	2,923
GS-70-700	27.56	59.84	2,923
GS-70-800	31.50	67.72	2,597

**Ordering Example** **GS-70-200-EE-8000**

Type (Push Type) \_\_\_\_\_

Body 2.76" (70 mm) \_\_\_\_\_

Stroke 7.87" (200 mm) \_\_\_\_\_

Piston Rod End Fitting E24 \_\_\_\_\_

Body End Fitting E24 \_\_\_\_\_

Nominal Force  $F_1$  1,798 lbs (8,000 N) \_\_\_\_\_

**Mounting accessories see from page 212.**

### Technical Data

**Extension force:** 450 lbs to 2,923 lbs (compressed up to 3,653 lbs)

**Progression:** Approx. 25 %

**Operating temperature range:** -4 °F to 176 °F

**Material:** Outer body: Coated steel; Piston rod: Hard chrome plated steel; End fittings: Zinc plated steel

**Mounting:** In any position. Hint: We recommend mounting with piston rod downwards to take advantage of the built-in end position damping.


**End position damping length:** approx. 0.39" to 0.79" (depending on the stroke)

**Positive stop:** External positive stop at the end of stroke provided by the customer.

**Note:** Increased break-away force if unit has not moved for some time.

**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

**Safety information:** Gas springs (push type) should not be installed under pre-tension.

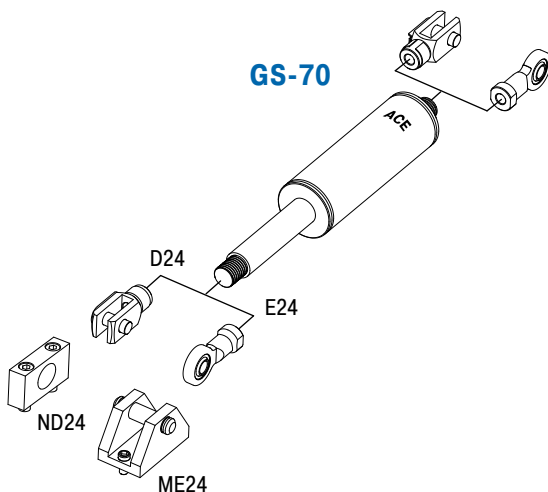

## GS-8-V4A to GS-40-VA

With food grade oil for FDA compliance

**Valve Technology, Stainless Steel**


**Extension force 2 lbs to 1,124 lbs**

**Stroke 0.79 in to 27.56 in**

Protection against corrosion and superior visual appearance for even more sophisticated requirements: Based on ACE's industrial gas springs GS-8 to 40 made of steel, these models combine all advantages of stainless steel: they look great and are rust free. They are filled with food-grade oil as standard, which conforms to the requirements of FDA 21 CFR 178.3570.

These ACE gas springs not only look good, they are also available in various stroke lengths and extension forces. A comprehensive range of accessories in stainless steel guarantees easy assembly and a broad range of uses.

ACE stainless steel industrial gas springs are used in the automotive sector, in industrial applications, automation and machine building and medical clean room technology as well as in the food, electronics and shipbuilding industries.

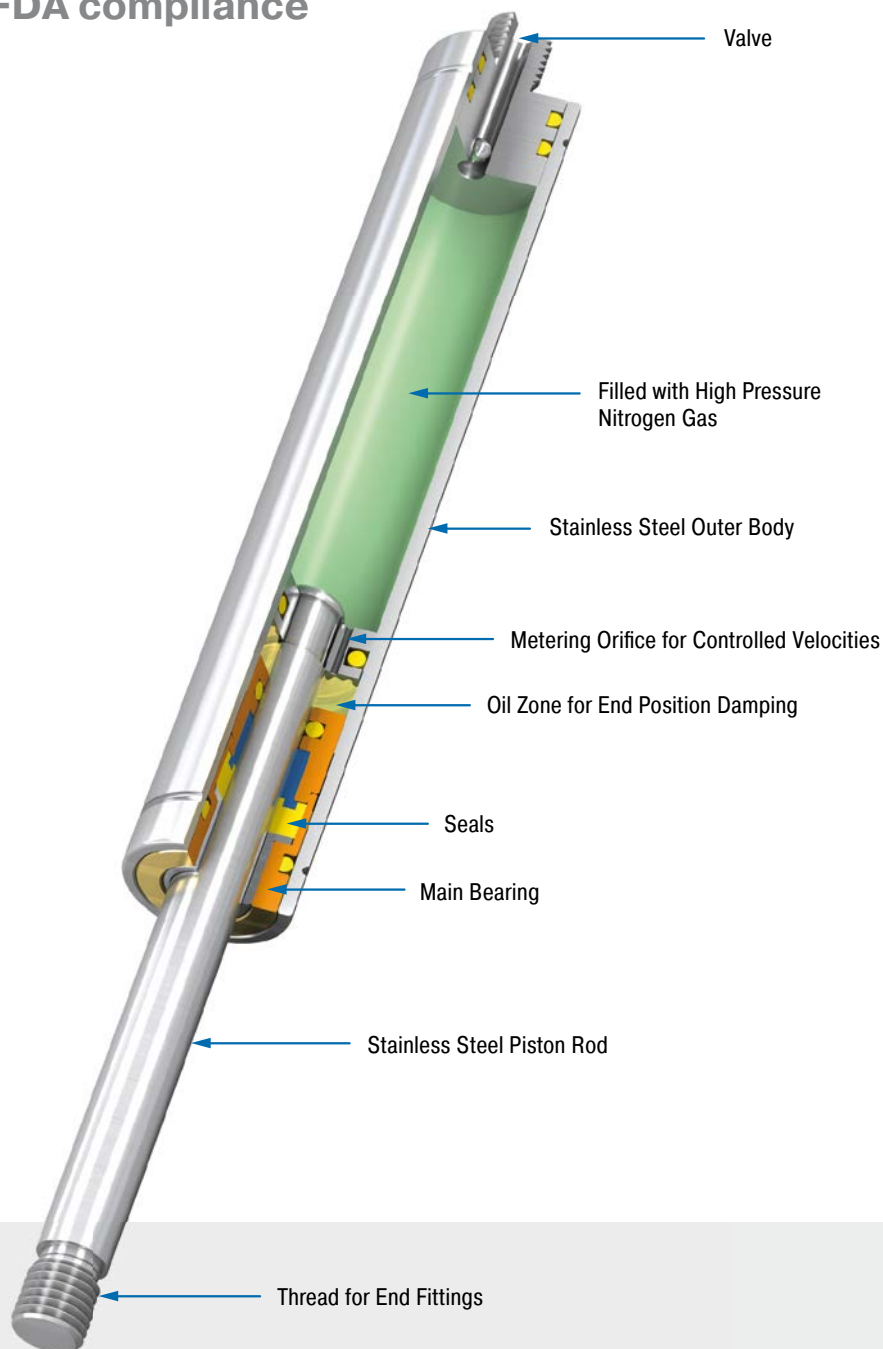

### Technical Data

**Extension force:** 2 lbs to 1,124 lbs

**Piston rod diameter:** Ø 0.12 in to Ø 1.18 in

**Progression:** Approx. 13 % to 59 %  
(depending on size and stroke)

**Lifetime:** Approx. 250,000 cycles

**Operating temperature range:** -4 °F to +176 °F

**Material:** Outer body, Piston rod, End fittings:  
Stainless steel (1.4301/1.4305, AISI 304/303  
and 1.4404/1.4571, AISI 316L/316Ti)

**Operating fluid:** Nitrogen gas and HLP oil  
according to DIN 51524, part 2

**Mounting:** We recommend mounting with  
piston rod downwards to take advantage of the  
built-in end position damping.

**End position damping length:** Approx.  
0.2 in to 1.18 in (depending on the stroke)

**Positive stop:** External positive stop at the  
end of stroke provided by the customer.

**Application field:** Hoods, Shutters, Machine  
housing, Conveyor systems, Control boxes,  
Furniture industry, Shipbuilding, Food industry,  
Pharmaceutical industry, Folding elements

**Note:** Special oil according to FDA 21 CFR  
178.3570 of the food industry

**End fittings:** They are interchangeable and if  
necessary must be positively secured by the  
customer to prevent unscrewing.

**Safety information:** Gas pressure springs  
should not be installed under pre-tension.

**On request:** Special oils and other special  
options. Alternative accessories. Different end  
position damping and extension speed. Other  
gas springs material 1.4404/1.4571, AISI  
316L/316Ti (V4A) available on request.

Valve Technology, Stainless Steel, Extension force 2 lbs to 22 lbs (compressed up to 29 lbs)

### End Fitting

### Standard Dimensions

### End Fitting

**B3.5**

M3.5x0.6

Ø.12

Stroke

Ø.31

.20

L +/- 0.08 extended

.20

**Performance and Dimensions**

TYPES	Stroke inch	L extended inch	Extension force max. lbs
GS-8-20-V4A	0.79	2.83	22
GS-8-30-V4A	1.18	3.62	22
GS-8-40-V4A	1.57	4.41	22
GS-8-50-V4A	1.97	5.20	22
GS-8-60-V4A	2.36	5.98	22
GS-8-80-V4A	3.14	7.56	22

**Ordering Example**

GS-8-30-AC-30-V4A

Type (Push Type) \_\_\_\_\_

Body 0.31" (8 mm) \_\_\_\_\_

Stroke 1.18" (30 mm) \_\_\_\_\_

Piston Rod End Fitting A3.5-V4A \_\_\_\_\_

Body End Fitting C3.5-V4A \_\_\_\_\_

Nominal Force F<sub>1</sub> 7 lbs (30 N) \_\_\_\_\_

Material (1.4404/1.4571, AISI 316L/316Ti, V4A) \_\_\_\_\_

**Stud Thread B3.5**

**Eye A3.5-V4A**  
max. force 83 lbs

**Angle Ball Joint C3.5-V4A**  
max. force 83 lbs

**Clevis Fork D3.5-V4A**  
max. force 83 lbs

**Ball Socket G3.5-V4A**  
max. force 83 lbs

**Adjuster Knob DE-GAS-3.5**  
See page 191.

**A3.5-V4A**

Radius R0.16

Ø.31

.16

.24

.43

**C3.5-V4A**

Ø.51

Ø.31

.33

.39

.71

M4x0.7

36°

**D3.5-V4A**

Ø.16

Ø.31

.16

.31

.20

.63

**G3.5-V4A**

Ø.51

Ø.31

.16

Ø.31

.24


.71

Mounting accessories see from page 220.

### Technical Data

- Extension force:** 2 lbs to 22 lbs (compressed up to 29 lbs)
- Progression:** Approx. 28 % to 31 %
- Operating temperature range:** -4 °F to +176 °F
- Material:** Outer body, Piston rod, End fittings: Stainless steel (1.4404/1.4571, AISI 316L/316Ti)
- Mounting:** We recommend mounting with piston rod downwards to take advantage of the built-in end position damping.
- End position damping length:** approx. 0.2" (depending on the stroke)
- Positive stop:** External positive stop at the end of stroke provided by the customer.
- Note:** Special oil according to FDA 21 CFR 178.3570 of the food industry
- End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.
- Safety information:** Gas pressure springs should not be installed under pre-tension.

### GS-8-V4A

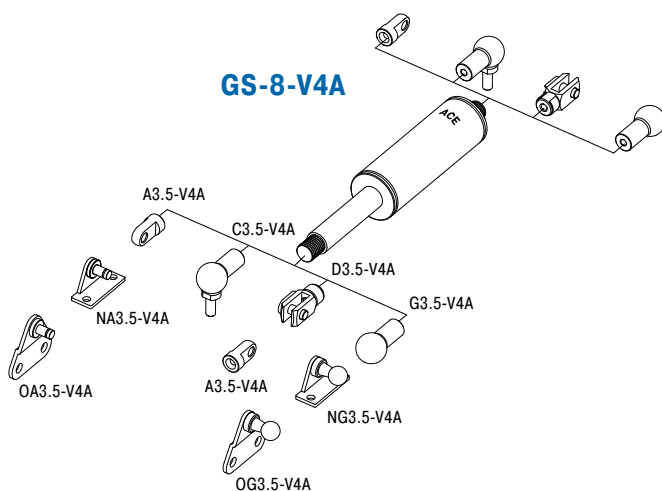

Valve Technology, Stainless Steel, Extension force 2 lbs to 22 lbs (compressed up to 26 lbs)

End Fitting

Standard Dimensions

End Fitting

**B3.5** Stud Thread **B3.5**

**A3.5-V4A** Eye **A3.5-V4A**  
max. force 83 lbs

**C3.5-V4A** Angle Ball Joint **C3.5-V4A**  
max. force 83 lbs

**D3.5-V4A** Clevis Fork **D3.5-V4A**  
max. force 83 lbs

**G3.5-V4A** Ball Socket **G3.5-V4A**  
max. force 83 lbs

**Adjuster Knob**  
**DE-GAS-3.5**  
See page 191.


Performance and Dimensions			
TYPES	Stroke inch	L extended inch	Extension force max. lbs
GS-10-20-V4A	0.79	2.83	22
GS-10-30-V4A	1.18	3.62	22
GS-10-40-V4A	1.57	4.41	22
GS-10-50-V4A	1.97	5.20	22
GS-10-60-V4A	2.36	5.98	22
GS-10-80-V4A	3.14	7.56	22

**Ordering Example**  
**GS-10-30-AC-30-V4A**  
 Type (Push Type) \_\_\_\_\_  
 Body 0.39" (10 mm) \_\_\_\_\_  
 Stroke 1.18" (30 mm) \_\_\_\_\_  
 Piston Rod End Fitting A3.5-V4A \_\_\_\_\_  
 Body End Fitting C3.5-V4A \_\_\_\_\_  
 Nominal Force F<sub>1</sub> 7 lbs (30 N) \_\_\_\_\_  
 Material (1.4404/1.4571, AISI 316L/316Ti, V4A) \_\_\_\_\_

Mounting accessories see from page 220.

Technical Data

- Extension force:** 2 lbs to 22 lbs (compressed up to 26 lbs)
- Progression:** Approx. 13 % to 16 %
- Operating temperature range:** -4 °F to +176 °F
- Material:** Outer body, Piston rod, End fittings: Stainless steel (1.4404/1.4571, AISI 316L/316Ti)
- Mounting:** We recommend mounting with piston rod downwards to take advantage of the built-in end position damping.
- End position damping length:** approx. 0.2" (depending on the stroke)
- Positive stop:** External positive stop at the end of stroke provided by the customer.
- Note:** Special oil according to FDA 21 CFR 178.3570 of the food industry
- End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.
- Safety information:** Gas pressure springs should not be installed under pre-tension.

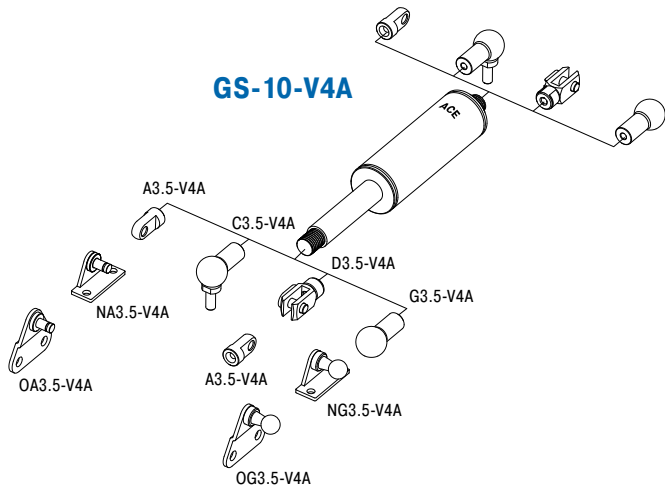

Valve Technology, Stainless Steel, Extension force 3 lbs to 40 lbs (compressed up to 51 lbs)

### End Fitting

### Standard Dimensions

### End Fitting

**B3.5**

**A3.5-V4A**

**C3.5-V4A**

**D3.5-V4A**

**G3.5-V4A**

Performance and Dimensions			
TYPES	Stroke inch	L extended inch	Extension force max. lbs
GS-12-20-V4A	0.79	2.83	40
GS-12-30-V4A	1.18	3.62	40
GS-12-40-V4A	1.57	4.41	40
GS-12-50-V4A	1.97	5.20	40
GS-12-60-V4A	2.36	5.98	40
GS-12-80-V4A	3.14	7.56	34
GS-12-100-V4A	3.94	9.13	34
GS-12-120-V4A	4.72	10.71	27
GS-12-150-V4A	5.91	13.07	22

**Ordering Example**

**GS-12-100-AA-30-V4A**

Type (Push Type) \_\_\_\_\_

Body 0.47" (12 mm) \_\_\_\_\_

Stroke 3.94" (100 mm) \_\_\_\_\_

Piston Rod End Fitting A3.5-V4A \_\_\_\_\_

Body End Fitting A3.5-V4A \_\_\_\_\_

Nominal Force F<sub>1</sub> 7 lbs (30 N) \_\_\_\_\_

Material (1.4404/1.4571, AISI 316L/316Ti, V4A) \_\_\_\_\_

**Mounting accessories see from page 220.**

**Stud Thread B3.5**

**Eye A3.5-V4A**  
max. force 83 lbs


**Angle Ball Joint C3.5-V4A**  
max. force 83 lbs

**Clevis Fork D3.5-V4A**  
max. force 83 lbs

**Ball Socket G3.5-V4A**  
max. force 83 lbs

**Adjuster Knob DE-GAS-3.5**  
See page 191.

Issue 04.2018 – Specifications subject to change

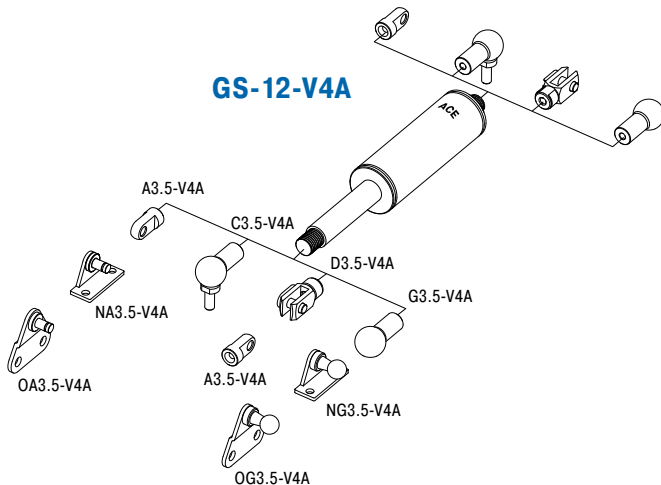

### Technical Data

- Extension force:** 3 lbs to 40 lbs (compressed up to 51 lbs)
- Progression:** Approx. 20 % to 25 %
- Operating temperature range:** -4 °F to +176 °F
- Material:** Outer body, Piston rod, End fittings: Stainless steel (1.4404/1.4571, AISI 316L/316Ti)
- Mounting:** We recommend mounting with piston rod downwards to take advantage of the built-in end position damping.
- End position damping length:** approx. 0.39" (depending on the stroke)
- Positive stop:** External positive stop at the end of stroke provided by the customer.
- Note:** Special oil according to FDA 21 CFR 178.3570 of the food industry
- End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.
- Safety information:** Gas pressure springs should not be installed under pre-tension.

Valve Technology, Stainless Steel, Extension force 9 lbs to 90 lbs (compressed up to 138 lbs)

End Fitting

Standard Dimensions

End Fitting

**B5**

**A5-VA**

**C5-VA**

**D5-VA**

**E5-VA**

**G5-VA**

**Rod Shroud W5-15-VA**

**Performance and Dimensions**

TYPES	Stroke inch	L extended inch	Extension force max. lbs
GS-15-20-VA	0.79	2.91	90
GS-15-40-VA	1.57	4.49	90
GS-15-50-VA	1.97	5.28	90
GS-15-60-VA	2.36	6.06	90
GS-15-80-VA	3.15	7.64	90
GS-15-100-VA	3.94	9.21	90
GS-15-120-VA	4.72	10.79	90
GS-15-150-VA	5.91	13.15	90

**Ordering Example**

GS-15-150-AC-150-VA

Type (Push Type) \_\_\_\_\_

Body 0.61" (15.6 mm) \_\_\_\_\_

Stroke 5.91" (150 mm) \_\_\_\_\_

Piston Rod End Fitting A5-VA \_\_\_\_\_

Body End Fitting C5-VA \_\_\_\_\_

Nominal Force F<sub>1</sub> 34 lbs (150 N) \_\_\_\_\_

Material (1.4301/1.4305, AISI 304/303, VA) \_\_\_\_\_

Stud Thread **B5**

**Eye A5-VA**  
max. force 110 lbs

**Angle Ball Joint C5-VA**  
max. force 97 lbs


**Clevis Fork D5-VA**  
max. force 110 lbs

**Swivel Eye E5-VA**  
max. force 110 lbs

**Ball Socket G5-VA**  
max. force 97 lbs

**Adjuster Knob DE-GAS-5**  
See page 191.

Mounting accessories see from page 220.

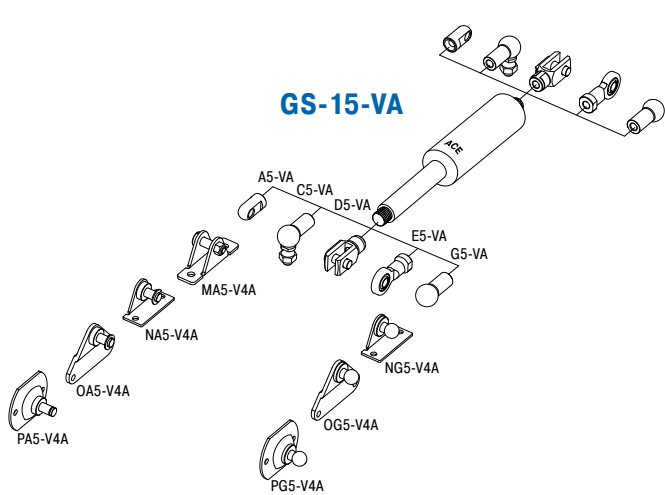

Technical Data

- Extension force:** 9 lbs to 90 lbs (compressed up to 138 lbs)
- Progression:** Approx. 30 % to 53 %
- Operating temperature range:** -4 °F to +176 °F
- Material:** Outer body, Piston rod, End fittings: Stainless steel (1.4301/1.4305, AISI 304/303)
- Mounting:** We recommend mounting with piston rod downwards to take advantage of the built-in end position damping.
- End position damping length:** approx. 0.79" (depending on the stroke)
- Positive stop:** External positive stop at the end of stroke provided by the customer.
- Note:** Special oil according to FDA 21 CFR 178.3570 of the food industry
- End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.
- Safety information:** Gas pressure springs should not be installed under pre-tension.

Valve Technology, Stainless Steel, Extension force 11 lbs to 157 lbs (compressed up to 208 lbs)

### End Fitting

### Standard Dimensions

### End Fitting

**B8**

**A8-VA**

**C8-VA**

**D8-VA**

**E8-VA**

**G8-VA**

**Rod Shroud W8-19-VA**

**Stud Thread B8**

**Eye A8-VA**  
max. force 351 lbs

**Angle Ball Joint C8-VA**  
max. force 256 lbs

**Clevis Fork D8-VA**  
max. force 351 lbs

**Swivel Eye E8-VA**  
max. force 351 lbs

**Ball Socket G8-VA**  
max. force 256 lbs

**Adjuster Knob DE-GAS-8**  
See page 191.

Performance and Dimensions			
TYPES	Stroke inch	L extended inch	Extension force max. lbs
GS-19-50-VA	1.97	6.46	157
GS-19-100-VA	3.94	10.39	157
GS-19-150-VA	5.91	14.33	157
GS-19-200-VA	7.87	18.27	157
GS-19-250-VA	9.84	22.20	135
GS-19-300-VA	11.81	26.14	101

**Ordering Example** **GS-19-150-AC-600-VA**

Type (Push Type) \_\_\_\_\_

Body 0.75" (19 mm) \_\_\_\_\_

Stroke 5.91" (150 mm) \_\_\_\_\_

Piston Rod End Fitting A8-VA \_\_\_\_\_

Body End Fitting C8-VA \_\_\_\_\_


Nominal Force F<sub>1</sub> 135 lbs (600 N) \_\_\_\_\_

Material (1.4301/1.4305, AISI 304/303, VA) \_\_\_\_\_

Mounting accessories see from page 220.

### Technical Data

- Extension force:** 11 lbs to 157 lbs (compressed up to 208 lbs)
- Progression:** Approx. 28 % to 32 %
- Operating temperature range:** -4 °F to +176 °F
- Material:** Outer body, Piston rod, End fittings: Stainless steel (1.4301/1.4305, AISI 304/303)
- Mounting:** We recommend mounting with piston rod downwards to take advantage of the built-in end position damping.
- End position damping length:** approx. 0.79" (depending on the stroke)
- Positive stop:** External positive stop at the end of stroke provided by the customer.
- Note:** Special oil according to FDA 21 CFR 178.3570 of the food industry
- End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.
- Safety information:** Gas pressure springs should not be installed under pre-tension.

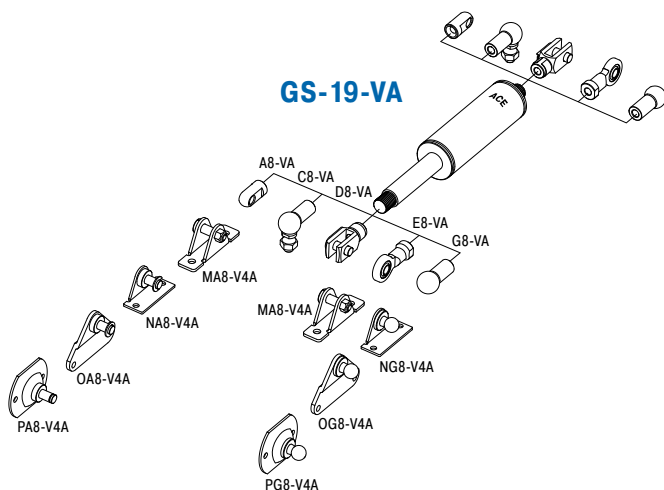

Issue 04.2018 – Specifications subject to change

Valve Technology, Stainless Steel, Extension force 22 lbs to 270 lbs (compressed up to 359 lbs)

End Fitting

Standard Dimensions

End Fitting

**B8** Stud Thread **B8**

**A8-VA** Eye **A8-VA**  
max. force 351 lbs

**C8-VA** Angle Ball Joint **C8-VA**  
max. force 256 lbs

**D8-VA** Clevis Fork **D8-VA**  
max. force 351 lbs

**E8-VA** Swivel Eye **E8-VA**  
max. force 351 lbs

**G8-VA** Ball Socket **G8-VA**  
max. force 256 lbs

**Rod Shroud W8-22-VA**

**Adjuster Knob DE-GAS-8**  
See page 191.

Performance and Dimensions			
TYPES	Stroke inch	L extended inch	Extension force max. lbs
GS-22-50-VA	1.97	6.46	270
GS-22-100-VA	3.94	10.39	270
GS-22-150-VA	5.91	14.33	270
GS-22-200-VA	7.87	18.28	270
GS-22-250-VA	9.84	22.20	270
GS-22-300-VA	11.81	26.14	247
GS-22-350-VA	13.78	30.08	191
GS-22-400-VA	15.75	34.02	146
GS-22-450-VA	17.72	37.95	124
GS-22-500-VA	19.69	41.89	101
GS-22-550-VA	21.65	45.83	90
GS-22-600-VA	23.62	49.76	79
GS-22-650-VA	25.59	53.70	67
GS-22-700-VA	27.56	57.64	56

**Ordering Example**

**GS-22-150-AE-800-VA**

Type (Push Type) \_\_\_\_\_  
 Body 0.91" (23 mm) \_\_\_\_\_  
 Stroke 5.91" (150 mm) \_\_\_\_\_  
 Piston Rod End Fitting A8-VA \_\_\_\_\_  
 Body End Fitting E8-VA \_\_\_\_\_  
 Nominal Force F<sub>1</sub> 180 lbs (800 N) \_\_\_\_\_  
 Material (1.4301/1.4305, AISI 304/303, VA) \_\_\_\_\_

**Mounting accessories see from page 220.**

Technical Data

**Extension force:** 22 lbs to 270 lbs (compressed up to 359 lbs)

**Progression:** Approx. 29 % to 33 %

**Operating temperature range:** -4 °F to +176 °F

**Material:** Outer body, Piston rod, End fittings: Stainless steel (1.4301/1.4305, AISI 304/303)

**Mounting:** We recommend mounting with piston rod downwards to take advantage of the built-in end position damping.


**End position damping length:** approx. 0.79" (depending on the stroke)

**Positive stop:** External positive stop at the end of stroke provided by the customer.

**Note:** Special oil according to FDA 21 CFR 178.3570 of the food industry

**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

**Safety information:** Gas pressure springs should not be installed under pre-tension.

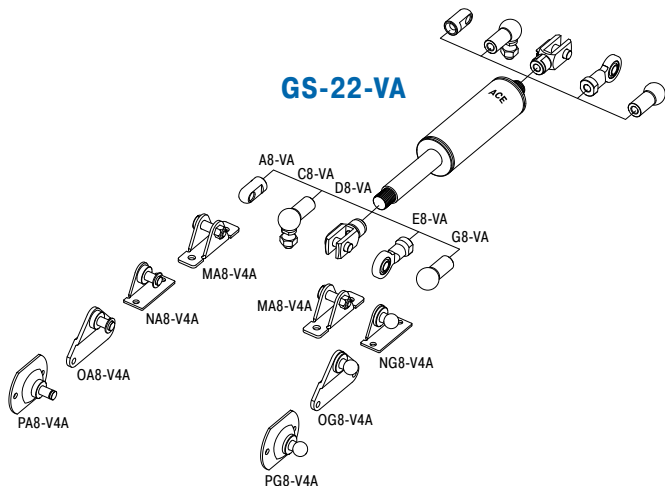



Valve Technology, Stainless Steel, Extension force 34 lbs to 562 lbs (compressed up to 894 lbs)

### End Fitting

### Standard Dimensions

### End Fitting

**B10**

**A10-VA**

**C10-VA**

**D10-VA**

**E10-VA**

**Rod Shroud W10-28-VA**

TYPES	Stroke inch	L extended inch	Extension force max. lbs
GS-28-100-VA	3.94	10.31	562
GS-28-150-VA	5.91	14.25	562
GS-28-200-VA	7.87	18.19	562
GS-28-250-VA	9.84	22.13	562
GS-28-300-VA	11.81	26.06	562
GS-28-350-VA	13.78	30.00	562
GS-28-400-VA	15.75	33.94	540
GS-28-450-VA	17.72	37.87	438
GS-28-500-VA	19.69	41.81	360
GS-28-550-VA	21.65	45.75	303
GS-28-600-VA	23.62	49.69	259
GS-28-650-VA	25.59	53.62	225

**Performance and Dimensions**

**Ordering Example**

GS-28-150-EE-1200-VA

Type (Push Type) \_\_\_\_\_

Body 1.1" (28 mm) \_\_\_\_\_

Stroke 5.91" (150 mm) \_\_\_\_\_

Piston Rod End Fitting E10-VA \_\_\_\_\_

Body End Fitting E10-VA \_\_\_\_\_

Nominal Force F<sub>1</sub> 270 lbs (1,200 N) \_\_\_\_\_

Material (1.4301/1.4305, AISI 304/303, VA) \_\_\_\_\_

**Stud Thread B10**

**Eye A10-VA**  
max. force 854 lbs

**Angle Ball Joint C10-VA**  
max. force 393 lbs

**Clevis Fork D10-VA**  
max. force 854 lbs


**Swivel Eye E10-VA**  
max. force 854 lbs

**Adjuster Knob DE-GAS-10**  
See page 191.

**Mounting accessories see from page 220.**

### Technical Data

- Extension force:** 34 lbs to 562 lbs (compressed up to 894 lbs)
- Progression:** Approx. 53 % to 59 %
- Operating temperature range:** -4 °F to +176 °F
- Material:** Outer body, Piston rod, End fittings: Stainless steel (1.4301/1.4305, AISI 304/303)
- Mounting:** We recommend mounting with piston rod downwards to take advantage of the built-in end position damping.
- End position damping length:** approx. 0.79" (depending on the stroke)
- Positive stop:** External positive stop at the end of stroke provided by the customer.
- Note:** Special oil according to FDA 21 CFR 178.3570 of the food industry
- End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.
- Safety information:** Gas pressure springs should not be installed under pre-tension.

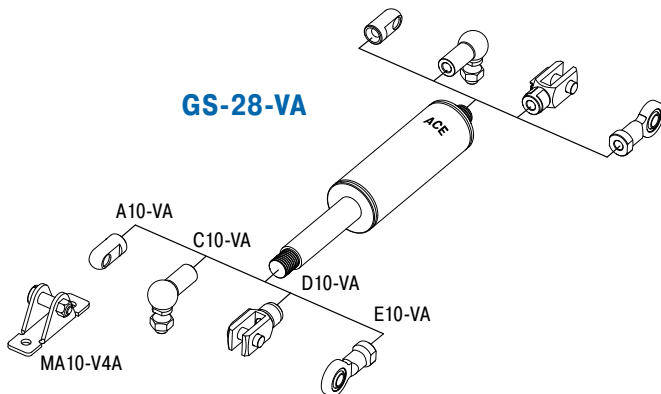

Valve Technology, Stainless Steel, Extension force 112 lbs to 1,124 lbs (compressed up to 1,596 lbs)

End Fitting

Standard Dimensions

End Fitting

**B14**

**A14-VA**

**C14-VA**

**D14-VA**

**E14-VA**

**Rod Shroud W14-40-VA**

**Stud Thread B14**

**Eye A14-VA**  
max. force 1,574 lbs

**Angle Ball Joint C14-VA**  
max. force 719 lbs

**Clevis Fork D14-VA**  
max. force 1,574 lbs

**Swivel Eye E14-VA**  
max. force 1,574 lbs

**Adjuster Knob DE-GAS-14**  
See page 191.

Performance and Dimensions			
TYPES	Stroke inch	L extended inch	Extension force max. lbs
GS-40-100-VA	3.94	12.48	1,124
GS-40-150-VA	5.91	16.42	1,124
GS-40-200-VA	7.87	20.35	1,124
GS-40-300-VA	11.81	28.23	1,124
GS-40-400-VA	15.75	36.10	1,124
GS-40-500-VA	19.69	43.98	1,124
GS-40-600-VA	23.62	51.85	933

**Ordering Example**

**GS-40-150-DD-3500-VA**

Type (Push Type) \_\_\_\_\_

Body 1.57" (40 mm) \_\_\_\_\_

Stroke 5.91" (150 mm) \_\_\_\_\_


Piston Rod End Fitting D14-VA \_\_\_\_\_

Body End Fitting D14-VA \_\_\_\_\_

Nominal Force F<sub>1</sub> 787 lbs (3,500 N) \_\_\_\_\_

Material (1.4301/1.4305, AISI 304/303, VA) \_\_\_\_\_

**Mounting accessories see from page 220.**

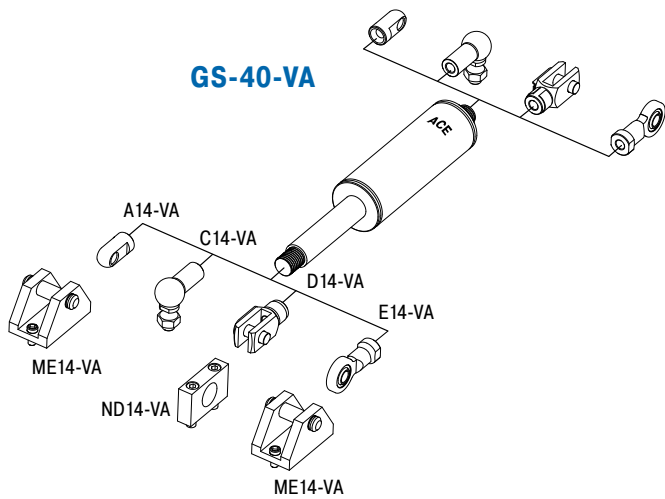

Technical Data

- Extension force:** 112 lbs to 1,124 lbs (compressed up to 1,596 lbs)
- Progression:** Approx. 34 % to 42 %
- Operating temperature range:** -4 °F to +176 °F
- Material:** Outer body, Piston rod, End fittings: Stainless steel (1.4301/1.4305, AISI 304/303)
- Mounting:** We recommend mounting with piston rod downwards to take advantage of the built-in end position damping.
- End position damping length:** approx. 1.18" (depending on the stroke)
- Positive stop:** External positive stop at the end of stroke provided by the customer.
- Note:** Special oil according to FDA 21 CFR 178.3570 of the food industry
- End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.
- Safety information:** Gas pressure springs should not be installed under pre-tension.

Issue 04.2018 – Specifications subject to change

## Stainless Steel Gas Springs (Push Type), V4A

TYPES	Stroke inch	L extended inch	Dimensions see page
GS-15-20-V4A	0.79	2.91	164
GS-15-40-V4A	1.57	4.49	164
GS-15-50-V4A	1.97	5.28	164
GS-15-60-V4A	2.36	6.06	164
GS-15-80-V4A	3.15	7.64	164
GS-15-100-V4A	3.94	9.21	164
GS-15-120-V4A	4.72	10.79	164
GS-15-150-V4A	5.91	13.15	164
GS-19-50-V4A	1.97	6.46	165
GS-19-100-V4A	3.94	10.39	165
GS-19-150-V4A	5.91	14.33	165
GS-19-200-V4A	7.87	18.27	165
GS-19-250-V4A	9.84	22.20	165
GS-19-300-V4A	11.81	26.14	165
GS-22-50-V4A	1.97	6.46	166
GS-22-100-V4A	3.94	10.39	166
GS-22-150-V4A	5.91	14.33	166
GS-22-200-V4A	7.87	18.28	166
GS-22-250-V4A	9.84	22.20	166
GS-22-300-V4A	11.81	26.14	166
GS-22-350-V4A	13.78	30.08	166
GS-22-400-V4A	15.75	34.02	166
GS-22-450-V4A	17.72	37.95	166
GS-22-500-V4A	19.69	41.89	166
GS-22-550-V4A	21.65	45.83	166
GS-22-600-V4A	23.62	49.76	166
GS-22-650-V4A	25.59	53.70	166
GS-22-700-V4A	27.56	57.64	166
GS-28-100-V4A	3.94	10.31	167
GS-28-150-V4A	5.91	14.25	167
GS-28-200-V4A	7.87	18.19	167
GS-28-250-V4A	9.84	22.13	167
GS-28-300-V4A	11.81	26.06	167
GS-28-350-V4A	13.78	30.00	167
GS-28-400-V4A	15.75	33.94	167
GS-28-450-V4A	17.72	37.87	167
GS-28-500-V4A	19.69	41.81	167
GS-28-550-V4A	21.65	45.75	167
GS-28-600-V4A	23.62	49.69	167
GS-28-650-V4A	25.59	53.62	167
GS-40-100-V4A	3.94	12.48	168
GS-40-150-V4A	5.91	16.42	168
GS-40-200-V4A	7.87	20.35	168
GS-40-300-V4A	11.81	28.23	168
GS-40-400-V4A	15.75	36.10	168
GS-40-500-V4A	19.69	43.98	168
GS-40-600-V4A	23.62	51.85	168

## Stainless Steel Accessories, V4A

TYPES	Dimensions see page
A5-V4A	222
C5-V4A	222
D5-V4A	222
E5-V4A	222
G5-V4A	222
A8-V4A	223
C8-V4A	223
D8-V4A	223
E8-V4A	223
G8-V4A	224
A10-V4A	224
C10-V4A	224
D10-V4A	224
E10-V4A	224
A14-V4A	225
C14-V4A	225
D14-V4A	225
E14-V4A	225

## GST-40 Tandem

Optimized dual force for heavy flaps and wide angle applications

### Valve Technology


**Extension force 67 lbs to 1,124 lbs**

**Stroke 1.97 in to 15.75 in**

Cover two differing force ranges: Tandem gas springs by ACE are maintenance-free and ready-to-install. Two pressure tubes deliver different extension forces and progression curves. With this type of gas spring you cover the different force ranges between the start and end of an application. ACE provides free specification support to deliver a gas spring that meets your specific application needs. We manufacture and adjust precisely to the required dynamics of the application.

A comprehensive range of accessories guarantees easy assembly and a broad range of uses, are specifically suitable for heavy loads with large opening angle. Stainless steel versions are available to meet environmental or appearance requirements.

Tandem push type gas springs from ACE are used in industrial applications such as in automation and machine building, in the automobile, electronics and furniture industries, but also in medical technology as well as for service hatches.

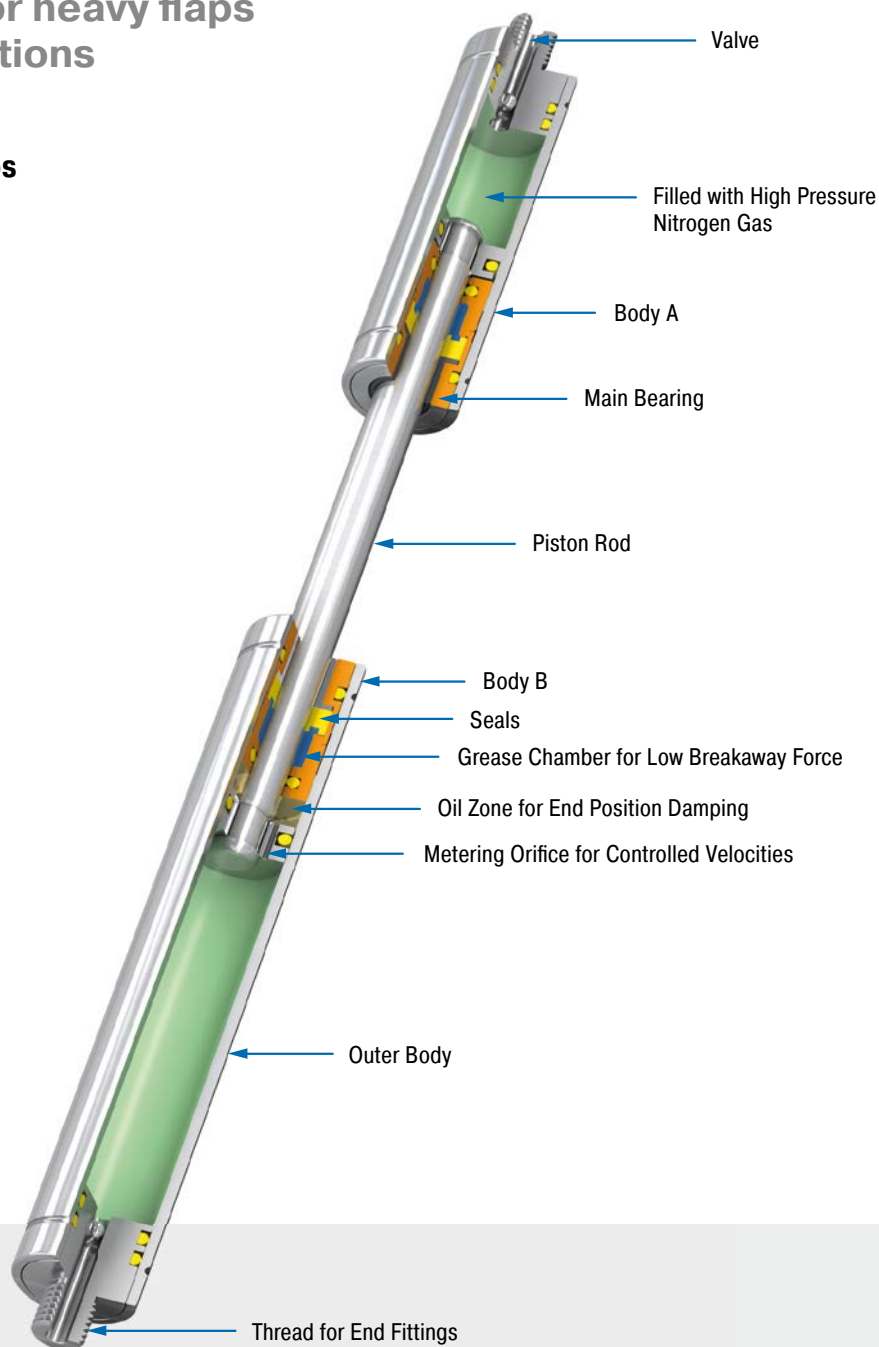

### Technical Data

**Extension force:** 67 lbs to 1,124 lbs

**Piston rod diameter:** Ø 0.79 in

**Progression:** According to calculation relating to your application.

**Lifetime:** Approx. 250,000 cycles

**Operating temperature range:** -4 °F to +176 °F

**Material:** Outer body, End fittings: Zinc plated steel; Piston rod: Steel with wear-resistant coating

**Operating fluid:** Nitrogen gas and oil

**Mounting:** In any position. Please adopt the mounting points determined by ACE.

**End position damping length:** Application-specific end position damping and extension speed.

**Positive stop:** External positive stop at the end of stroke provided by the customer.

**Application field:** Hoods, Shutters, Machine housing, Conveyor systems, Folding elements, Loading and lifting equipment

**Note:** These gas springs are tailored to the relevant application and are therefore not available ex stock.

**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.


**On request:** Special oils and other special options. Alternative accessories. Material 1.4301/1.4305, AISI 304/303 (V2A) and 1.4404/1.4571, AISI 316L/316Ti (V4A).

### End Fitting

### Standard Dimensions


### End Fitting

**A14**

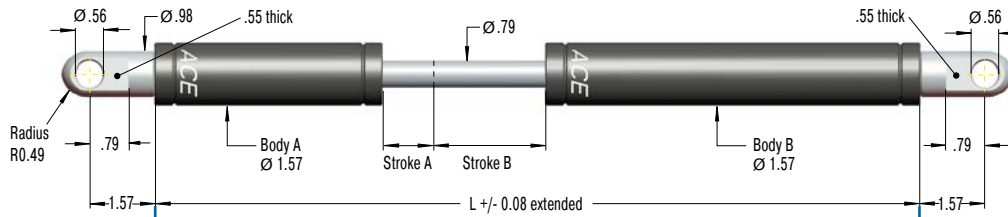

**Eye A14**  
max. force 2,248 lbs

**B14**




### Performance and Dimensions

TYPES	Stroke A inch	Stroke B inch	L extended inch	Extension force max. lbs
GST-40-50-100	1.97	3.94	10.09	1,124
GST-40-50-150	1.97	5.91	23.03	1,124
GST-40-50-200	1.97	7.87	26.97	1,124
GST-40-70-250	2.76	9.84	32.48	1,124
GST-40-70-300	2.76	11.81	36.42	1,124
GST-40-70-350	2.76	13.78	40.35	1,124
GST-40-70-400	2.76	15.75	40.35	1,124


**Stud Thread B14**

**D14**



**Clevis Fork D14**  
max. force 2,248 lbs

**E14**




**Swivel Eye E14**  
max. force 2,248 lbs

### Ordering Example

**GST-40-50-150-AD-900N-2500N**

Type (Tandem Gas Spring) \_\_\_\_\_  
 Body 1.57" (40 mm) \_\_\_\_\_  
 Stroke A 1.97" (50 mm) \_\_\_\_\_  
 Stroke B 5.91" (150 mm) \_\_\_\_\_  
 Body A End Fitting, A14 \_\_\_\_\_  
 Body B End Fitting, D14 \_\_\_\_\_  
 Nominal Force Body A, 202 lbs (900 N) \_\_\_\_\_  
 Nominal Force Body B, 562 lbs (2,500 N) \_\_\_\_\_

Mounting accessories see from page 212.

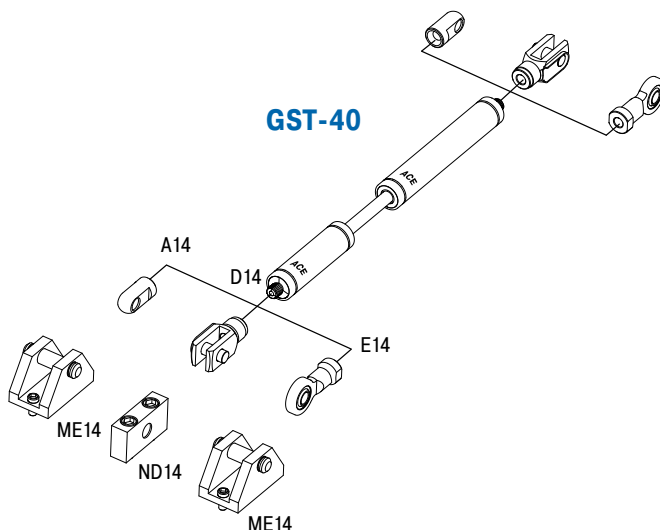

### Technical Data

- Extension force:** 67 lbs to 1,124 lbs
- Progression:** According to calculation relating to your application.
- Operating temperature range:** -4 °F to +176 °F
- Material:** Outer body, End fittings: Zinc plated steel; Piston rod: Steel with wear-resistant coating
- Mounting:** In any position. Please adopt the mounting points determined by ACE.
- End position damping length:** Application-specific end position damping and extension speed.
- Positive stop:** External positive stop at the end of stroke provided by the customer.
- Note:** These gas springs are tailored to the relevant application and are therefore not available ex stock.
- End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

## Application Examples

### GS-12

#### Safe opening and closing

ACE industrial gas springs (push type) protect samples in an incubator, which is used for chemical and biochemical applications. The plexiglass hood, under which may be found valuable laboratory goods, is securely held open by two maintenance-free, ready-to-install ACE industrial gas springs (push type) of the type GS-12-60-AA-X. With an end-position damping of 0.20 in and an extension force of 2.25 to 40.5 lbs, they help to handle the forces generated. The hood is always easily opened and remains in this position. It also remains securely shut when the incubator is in operation.




Very small ACE industrial gas springs (push type) enable careful opening and closing movements of a mini-incubator hood, under which may be found laboratory products

GFL Gesellschaft für Labortechnik mbH, 30938 Burgwedel, Germany

### GS-19

#### Doors open and close safely

ACE industrial gas springs make opening and closing doors of rescue helicopters easier. The maintenance-free, sealed systems are installed in the access doors of helicopters of the EC 135. There, they allow the crew to enter or exit the helicopter quickly, thus contributing to enhanced safety. The GS-19-300 gas springs provide a defined retraction speed and secure engagement of the door lock. The integrated end position damper allows gentle closing of the door and saves wear and tear on the valuable, lightweight material.

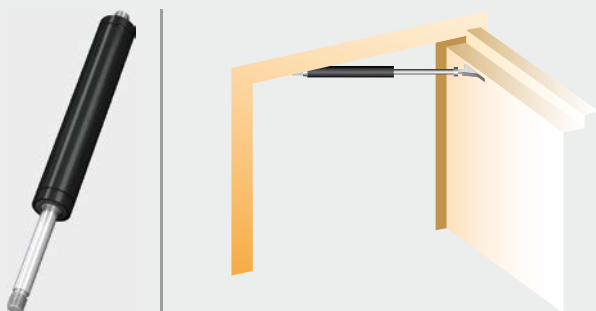


Industrial gas springs: For safe entry and exit

**GS-22-VA**

**Made-to-measure stainless steel gas springs**

A special hygiene and toilet chair, designed for children and young people with disabilities, must be firmly lockable in the sit and tilt positions. The practical aid thereby provided for relatives and carers can be attributed to two lockable ACE industrial gas springs (push type) which were especially developed and manufactured for this application and operate on the basis of the so-called tilt-in-space function. This allows the chair to be tilted forwards and backwards and provides significantly more convenience for users and patients. In order to meet all hygiene requirements, the gas springs are constructed in stainless steel.

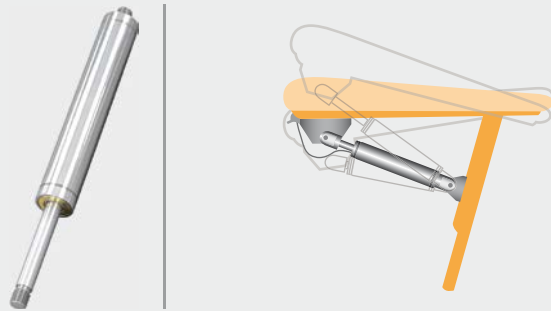


With inclination angles of 15 degrees to the front and rear, the ACE stainless steel gas springs facilitate the work of nurses  
Rifton Equipment, Rifton, New York 12471, USA

**GST-40**

**Tandemly-operated large flaps securely under control**

Underground distribution systems are visually advantageous. To facilitate their servicing, the heavy covers of the often large supply systems are brought back to the surface with the help of ACE industrial tandem gas springs (push type). This is quite easily achieved thanks to the use of two pressure pipes, the result of which is two different force ranges. This means fitters must not endure laborious bending and a downward passage into the system of channels. In addition to these advantages, the springs benefit from their long service life and their capacity to be used, as stainless steel variants, in even the most hygienically-sensitive areas.

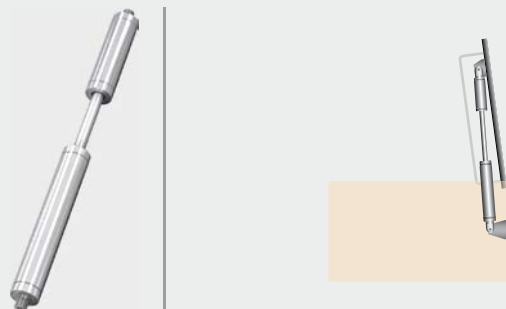

ACE industrial tandem gas springs (push type) enable easy maintenance of supply boxes by making the heavy flaps easier to operate  
Langmatz GmbH, 82467 Garmisch-Partenkirchen, Germany

Issue 04.2018 – Specifications subject to change

## Industrial Gas Springs – Pull Type

### Alternatives for tight spaces and mounting requirements

If ACE gas push type springs cannot be used due to a lack of space, ACE's industrial gas pull type springs come into their own. These compact assistants with body diameters of 0.59" to 1.57" (15 to 40 mm) are effective in the direction of traction and work in the opposite way to the principle of gas push type springs.

This means that the gas pressure in the cylinder draws the piston rod in and, when closing a flap for example, supports the manual force required for a controlled motion. ACE's gas pull type springs are also self-contained, maintenance-free machine elements and equipped with a standard valve to individually regulate the gas pressure, whereby they cover forces between 7 to 1125 lbf (30 and 5,000 N). The ability to mount in any orientation and position along with an extensive range of DIN standardized accessories enable universal use.

Compact design

Individual filling valve technology

Calculation program for specific design

Universally applicable






## Function of a Gas Spring – Pull Type

Gas pull type springs work based on the reverse principle of a gas push type spring. They are also individually filled according to customer request to a certain pressure (extension force  $F_1$ ). However, the piston rod here is pulled inwards by the gas pressure in the cylinder. The higher the pressure, the greater the traction force.

The piston ring surface between the piston rod and the inner tube is decisive for the function. When the piston rod pulls out, the nitrogen from the piston is compressed in the inner tube. The force increase (progression) of the gas spring is due to the rising pressure. The force increase is almost linear.

### Calculation Principles

#### Force-Stroke Characteristics of Traction Gas Spring (Pull Type)



$F_1$  = nominal force at 68 °F  
(this is the pressure figure normally used when specifying the gas spring)

$F_2$  = force in the complete extended position

When extending the piston rod, there is an additional friction force caused by the contact pressure of the seals (this **only** occurs **during the extension stroke**):

$F_3$  = force at the beginning of the extension stroke

$F_4$  = force at the end of the extension stroke

#### Gas Springs (Pull Type)

TYPES	Progression approx. %	<sup>1</sup> Friction $F_R$ approx. in lbs
GZ-15	12 - 22 <sup>2</sup>	12.36 - 31.47
GZ-19	21 - 28 <sup>2</sup>	4.50 - 8.99
GZ-28	28 - 30 <sup>2</sup>	22.48 - 44.96
GZ-40	43 - 45 <sup>2</sup>	

<sup>1</sup> Depending on the filling force

<sup>2</sup> Depending on the stroke

**Progression:** (the slope of the force line in the diagram above) is due to the reduction of the internal gas volume as the piston rod moves from its initial position to its fully stroked position. The approx. progression values given above for standard springs can be altered on request.

**Effect of temperature:** The nominal  $F_1$  figure is given at 68 °F. An increase of 50 °F will increase force by 3.4 %.

**Filling tolerances:** -4.50 lbs to +8.99 lbs or 5 % to 7 %. Depending on size and extension force the tolerances can differ.

Free  
calculation service  
see page 188!

## Industrial Gas Springs – Pull Type



### GZ-15 to GZ-40

Valve Technology

**Very low progression rate**

Hoods, Shutters, Machine housing, Conveyor systems

Page 176



### GZ-15-V4A to GZ-40-VA

Valve Technology, Stainless Steel

**Very low progression rate with FDA approval**

Hoods, Shutters, Machine housing, Conveyor systems

Page 182

## GZ-15 to GZ-40

Very low progression rate

### Valve Technology


**Traction force 9 lbs to 1,124 lbs**

**Stroke 0.79 in to 25.59 in**

The solution to a lack of space: If standard push type gas springs cannot be used due to a lack of space, ACE's industrial pull type gas springs are the solution. They work in the opposite way of standard push type gas springs. The piston rod is retracted when the cylinder is unloaded. The gas pressure in the cylinder draws the piston rod in.

ACE pull type gas springs offer the maximum service life thanks to the solid chrome-plated piston rod and an integrated sliding bearing. The maintenance-free and ready-to-install products are available in body diameters of 0.59" to 1.57" (15 to 40 mm) as well as forces from 8.99 lbs to 1,124 lbs. (40 to 5,000 N) and are available from stock with valve and a large selection of accessories. The traction force can be fine-tuned using the adjustment valve.

Gas traction springs from ACE are used in industrial applications, automation and machine building, especially in test equipment and in medical technology as well as in the electronics and furniture industries.

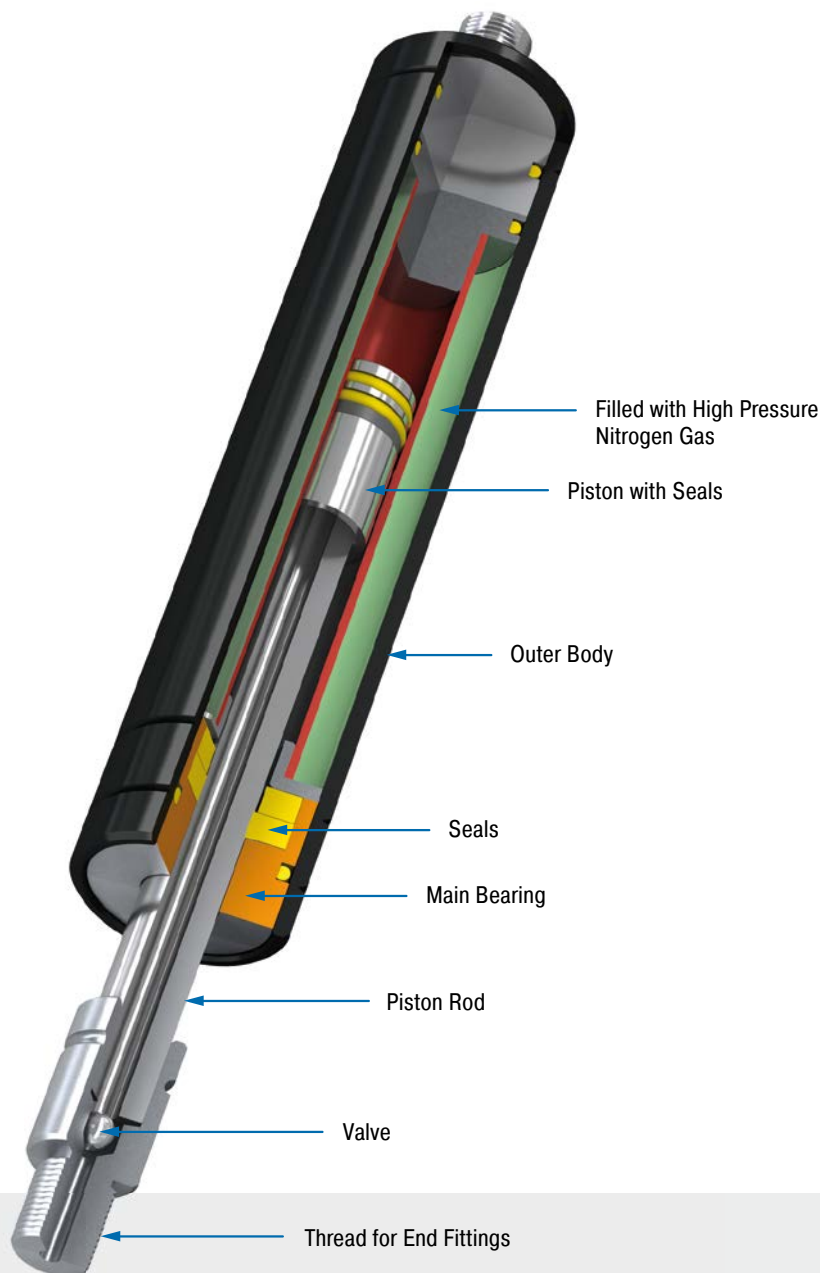

### Technical Data

**Traction force:** 9 lbs to 1,124 lbs

**Piston rod diameter:** Ø 0.16 in to Ø 1.10 in

**Progression:** Approx. 12 % to 45 %

**Lifetime:** Approx. 6,561 ft

**Operating temperature range:** -4 °F to +176 °F

**Material:** Outer body, End fittings: Zinc plated steel; Piston rod: Steel or stainless steel with wear-resistant coating

**Operating fluid:** Nitrogen gas

**Mounting:** With piston rod upwards.

**End position damping length:** Without damping. For end position damping use damping material (e.g. TUBUS or SLAB).

**Positive stop:** External positive stop at the end of stroke provided by the customer.

**Application field:** Hoods, Shutters, Machine housing, Conveyor systems, Control boxes, Furniture industry, Shipbuilding, Assembly stations, Vehicle technology, Folding elements

**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

**On request:** Special oils and other special options. Alternative accessories. Traction gas springs with end position damping also available on request.


Valve Technology, Traction force 11 lbs to 34 lbs (extended up to 41 lbs)

### End Fitting

### Standard Dimensions

### End Fitting

**A3.5**

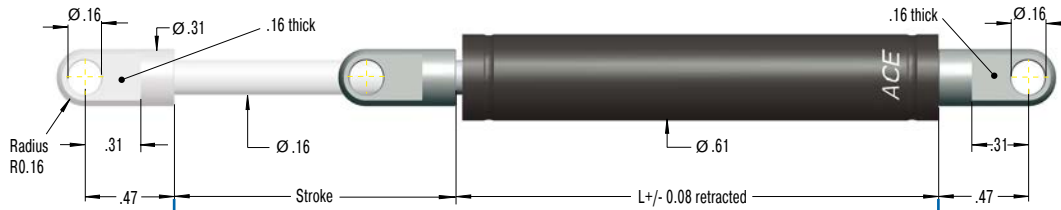

**Eye A3.5**  
max. force 83 lbs

**B3.5**




### Performance and Dimensions

TYPES	Stroke inch	L retracted inch	Traction force max. lbs
GZ-15-20	0.79	3.43	34
GZ-15-40	1.57	4.21	34
GZ-15-50	1.97	4.61	34
GZ-15-60	2.36	5.00	34
GZ-15-80	3.15	5.79	34
GZ-15-100	3.94	6.57	34
GZ-15-120	4.72	7.36	34
GZ-15-150	5.91	8.54	34


**Stud Thread B3.5**

**C3.5**




**Angle Ball Joint C3.5**  
max. force 83 lbs

**D3.5**




**Clevis Fork D3.5**  
max. force 83 lbs

**E3.5**



**Swivel Eye E3.5**  
max. force 83 lbs

**G3.5**



**Ball Socket G3.5**  
max. force 83 lbs

### Ordering Example


**GZ-15-150-AC-V-150**

Type (Pull Type) \_\_\_\_\_  
 Body 0.61" (15.6 mm) \_\_\_\_\_  
 Stroke 5.91" (150 mm) \_\_\_\_\_  
 Piston Rod End Fitting A3.5 \_\_\_\_\_  
 Body End Fitting C3.5 \_\_\_\_\_  
 Adjustable (V) \_\_\_\_\_  
 Traction Force F<sub>1</sub> 34 lbs (150 N) \_\_\_\_\_

Mounting accessories see from page 212.

**Adjuster Knob**  
**DE-GAS-3.5**

See page 191.

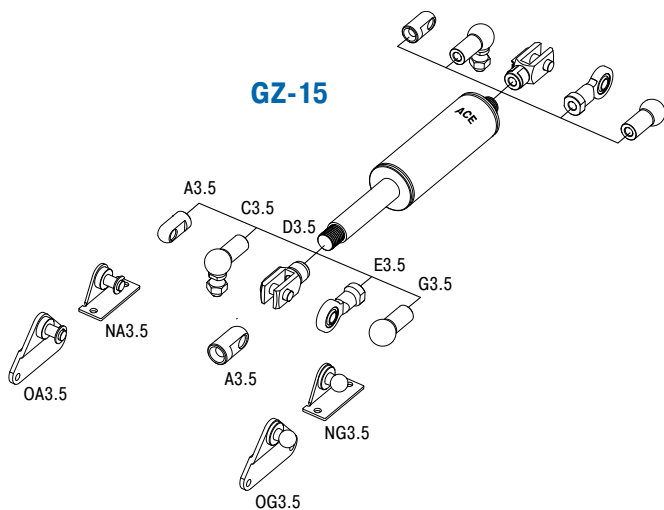

### Technical Data

**Traction force:** 11 lbs to 34 lbs (extended up to 41 lbs)

**Progression:** Approx. 12 % to 22 %

**Lifetime:** Approx. 6,561 ft

**Operating temperature range:** -4 °F to +176 °F

**Material:** Outer body, End fittings: Zinc plated steel; Piston rod: Stainless steel (1.4301/1.4305, AISI 304/303)

**Mounting:** With piston rod upwards.

**End position damping length:** Without damping. For end position damping use damping material (e.g. TUBUS or SLAB).

**Positive stop:** External positive stop at the end of stroke provided by the customer.

**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.


Valve Technology, Traction force 9 lbs to 79 lbs (extended up to 101 lbs)

**End Fitting**

**Standard Dimensions**

**End Fitting**


**A8**

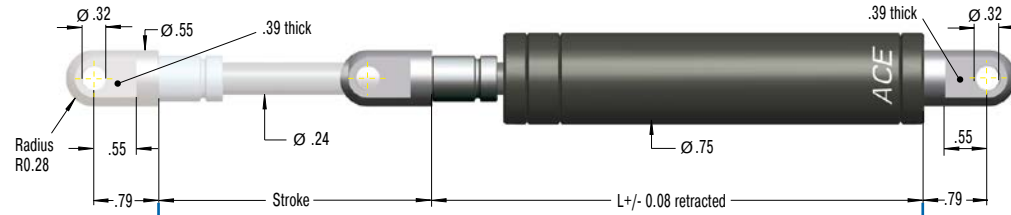

**Eye A8**  
max. force 674 lbs

**B8**

**C8**



**Performance and Dimensions**


TYPES	Stroke inch	L retracted inch	Traction force max. lbs
GZ-19-30	1.18	4.41	79
GZ-19-50	1.97	5.20	79
GZ-19-100	3.94	7.17	79
GZ-19-150	5.91	9.13	79
GZ-19-200	7.87	11.10	79
GZ-19-250	9.84	13.07	79

**Stud Thread B8**

**Angle Ball Joint C8**


max. force 270 lbs  
Also available with UNF thread 5/16-18.  
Order G5/16.

**D8**




**Clevis Fork D8**  
max. force 674 lbs

**E8**



**Swivel Eye E8**  
max. force 674 lbs

**G8**



**Ball Socket G8**  
max. force 270 lbs


**Ordering Example**

**GZ-19-150-AC-V-250**

- Type (Pull Type) \_\_\_\_\_
- Body 0.75" (19 mm) \_\_\_\_\_
- Stroke 5.91" (150 mm) \_\_\_\_\_
- Piston Rod End Fitting A8 \_\_\_\_\_
- Body End Fitting C8 \_\_\_\_\_
- Adjustable (V) \_\_\_\_\_
- Traction Force F<sub>1</sub> 56 lbs (250 N) \_\_\_\_\_


Mounting accessories see from page 212.

**Rod Shroud W8-19**

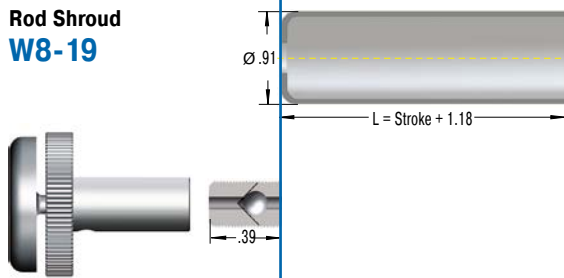

**Adjuster Knob DE-GAS-8**

See page 191.

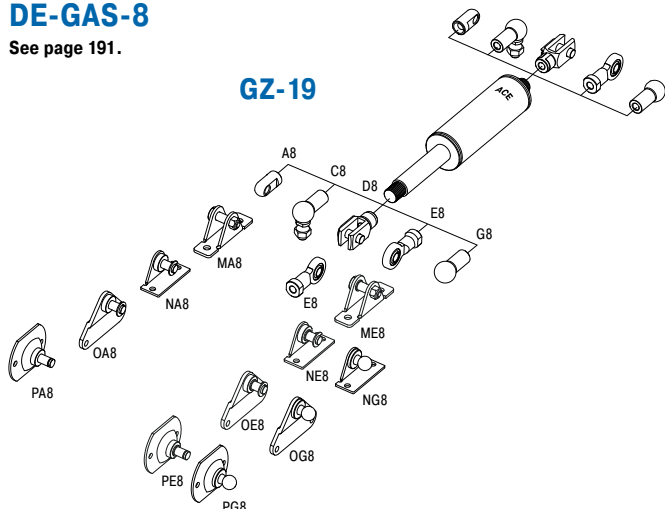

**Technical Data**

- Traction force:** 9 lbs to 79 lbs (extended up to 101 lbs)
- Progression:** Approx. 21 % to 28 %
- Lifetime:** Approx. 6,561 ft
- Operating temperature range:** -4 °F to +176 °F
- Material:** Outer body, End fittings: Zinc plated steel; Piston rod: Steel with wear-resistant coating
- Mounting:** With piston rod upwards.
- End position damping length:** Without damping. For end position damping use damping material (e.g. TUBUS or SLAB).
- Positive stop:** External positive stop at the end of stroke provided by the customer.
- End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

Issue 04.2018 – Specifications subject to change


Valve Technology, Traction force 34 lbs to 270 lbs (extended up to 351 lbs)

### End Fitting

### Standard Dimensions


### End Fitting

#### A10

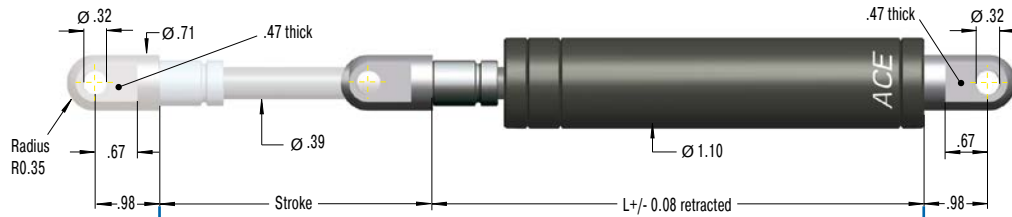


**Eye A10**  
max. force 2,248 lbs

#### B10




**Stud Thread B10**

#### C10




**Angle Ball Joint C10**  
max. force 405 lbs

#### D10



**Clevis Fork D10**  
max. force 2,248 lbs

#### E10



**Swivel Eye E10**  
max. force 2,248 lbs

### Performance and Dimensions

TYPES	Stroke inch	L retracted inch	Traction force max. lbs
GZ-28-30	1.18	5.12	270
GZ-28-50	1.97	5.91	270
GZ-28-100	3.94	7.87	270
GZ-28-150	5.91	9.84	270
GZ-28-200	7.87	11.81	270
GZ-28-250	9.84	13.78	270
GZ-28-300	11.81	15.75	270
GZ-28-350	13.78	17.72	270
GZ-28-400	15.75	19.69	270
GZ-28-450	17.72	21.65	270
GZ-28-500	19.69	23.62	270
GZ-28-550	21.65	25.59	270
GZ-28-600	23.62	27.56	270
GZ-28-650	25.59	29.53	270


### Ordering Example

### GZ-28-150-EE-V-800

Type (Pull Type) \_\_\_\_\_  
 Body 1.10" (28 mm) \_\_\_\_\_  
 Stroke 5.91" (150 mm) \_\_\_\_\_  
 Piston Rod End Fitting E10 \_\_\_\_\_  
 Body End Fitting E10 \_\_\_\_\_  
 Adjustable (V) \_\_\_\_\_  
 Traction Force F<sub>1</sub> 180 lbs (800 N) \_\_\_\_\_


Mounting accessories see from page 212.

### Rod Shroud W10-28



**Adjuster Knob DE-GAS-10**  
See page 191.

### GZ-28

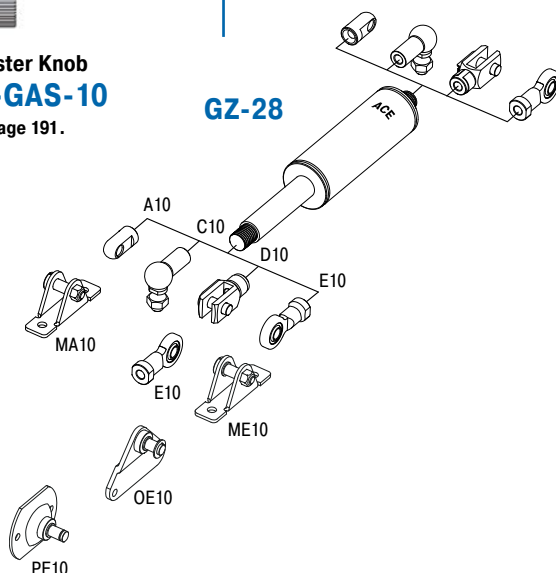

### Technical Data

**Traction force:** 34 lbs to 270 lbs (extended up to 351 lbs)  
**Progression:** Approx. 28 % to 30 %  
**Lifetime:** Approx. 6,561 ft  
**Operating temperature range:** -4 °F to +176 °F  
**Material:** Outer body, End fittings: Zinc plated steel; Piston rod: Steel with wear-resistant coating  
**Mounting:** With piston rod upwards.  
**End position damping length:** Without damping. For end position damping use damping material (e.g. TUBUS or SLAB).  
**Positive stop:** External positive stop at the end of stroke provided by the customer.  
**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.


Valve Technology, Traction force 112 lbs to 1,124 lbs (extended up to 1,630 lbs)

End Fitting

Standard Dimensions


End Fitting

A14

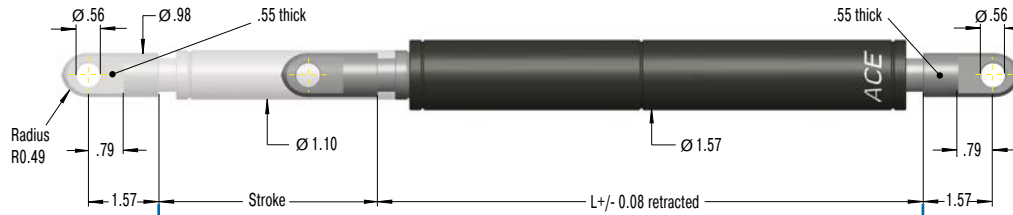


Eye A14  
max. force 2,248 lbs

B14




Stud Thread B14

C14




Angle Ball Joint C14  
max. force 719 lbs

D14



Clevis Fork D14  
max. force 2,248 lbs

E14



Swivel Eye E14  
max. force 2,248 lbs

Performance and Dimensions

TYPES	Stroke inch	L retracted inch	Traction force max. lbs
GZ-40-100	3.94	9.84	1,124
GZ-40-150	5.91	12.80	1,124
GZ-40-200	7.87	15.75	1,124
GZ-40-250	9.84	18.70	1,124
GZ-40-300	11.81	21.65	1,124
GZ-40-400	15.75	27.56	1,124
GZ-40-500	19.69	33.46	1,124
GZ-40-600	23.62	39.37	1,124


Ordering Example

GZ-40-150-EE-V-800

- Type (Pull Type)
- Body 1.57" (40 mm)
- Stroke 5.91" (150 mm)
- Piston Rod End Fitting E14
- Body End Fitting E14
- Adjustable (V)
- Traction Force F<sub>1</sub> 180 lbs (800 N)


Mounting accessories see from page 212.

Rod Shroud W14-40



Adjuster Knob DE-GAS-14

See page 191.

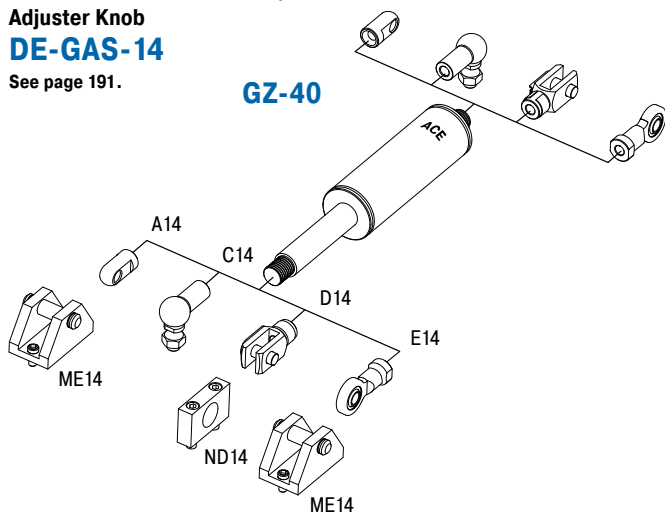

Technical Data

- Traction force:** 112 lbs to 1,124 lbs (extended up to 1,630 lbs)
- Progression:** Approx. 43 % to 45 %
- Lifetime:** Approx. 6,561 ft
- Operating temperature range:** -4 °F to +176 °F
- Material:** Outer body, End fittings: Zinc plated steel; Piston rod: Steel with wear-resistant coating
- Mounting:** With piston rod upwards.
- End position damping length:** Without damping. For end position damping use damping material (e.g. TUBUS or SLAB).
- Positive stop:** External positive stop at the end of stroke provided by the customer.
- End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

# ACE Easy Sizing

Just a few simple steps to your perfect ACE Gas Spring

**NEW !**

1

Select the position of flap and pivot point.

2

Specify your application within our 3D-simulator.

3

Calculate your ACE Gas Springs.

4

Add mounting accessories.

5

Send an order request.

**Talk to us!**

Sometimes your problems are more complicated than an online tool can solve. ACE application engineers have the skills, knowledge and training to deliver a solution.

**1-800-521-3320**

The screenshot shows the ACE Easy Sizing web application interface. At the top, there is a navigation bar with the ACE logo and 'ACE Controls Inc.' The main header area includes a search bar and a navigation menu with options like 'Products', 'Applications', 'Calculations', 'CAD & Downloads', 'Company', and 'Sales & Contact'. Below the header, there is a sub-header 'Just a few steps to your perfect fitting gas spring' and 'ACE Sizing Tools & Services'. The main content area is divided into several sections: 'ACE Easy Sizing' (with a sub-section for 'Gas Springs (Push Type)') and 'GS-8 to GS-40'. The 'Details of Flap' section includes input fields for Length (800 mm), Width (2400 mm), Height (40 mm), Handle Distance (800 mm), Mass (60 kg), Opening angle (88°), Number of gas springs (2), and Hinge Position (Bottom). The 'Material' section shows 'Steel, coated (NEWTOLINE)' and 'Ambient temperature' (20 °C). A 'Simulation' section displays a 3D model of a gas spring mechanism with a flap, and a 'Hand Force Trajectory' graph showing force (N) vs. angle (°). The 'Configuration' section includes options for 'End fitting (piston rod)', 'Eye A', 'Matching gas springs' (GS-22-300), 'End fitting (cylinder)', 'Eye A', 'Mounting bracket (piston rod)', 'Mounting Sketch (pdf)', and 'Mounting bracket (cylinder)'. A 'Calculate Your Gas Spring(s)' button is visible at the bottom of the configuration section. The page footer shows 'Amount 2' and a 'How to Order' button.

All available at  
[www.acecontrols.com](http://www.acecontrols.com)

Calculations



## GZ-15-V4A to GZ-40-VA

Very low progression rate with FDA approval

**Valve Technology, Stainless Steel**


**Traction force 9 lbs to 1,124 lbs**

**Stroke 0.79 in to 23.62 in**

Brilliant performance when things become tight: For specific use e.g. in tough surroundings or small spaces, the broad spectrum of ACE stainless steel industrial pull type gas springs come in body diameters from 0.59" to 1.57" (15 to 40 mm). These units supplement the comprehensive program of the ACE industrial pull type gas springs with valves.

This high quality design is rust free and is more robust against environmental impact compared with standard gas pull type springs. These stainless steel gas springs are also visually appealing, very durable and available, upon request, in many stroke lengths and traction forces. A comprehensive range of accessories in stainless steel guarantees easy assembly and a broad range of uses.

ACE industrial push type springs made of stainless steel are used in industries such as the chemical and food industry, in automobiles, plant engineering and shipbuilding and also in medical, military, environmental and water supply technology.

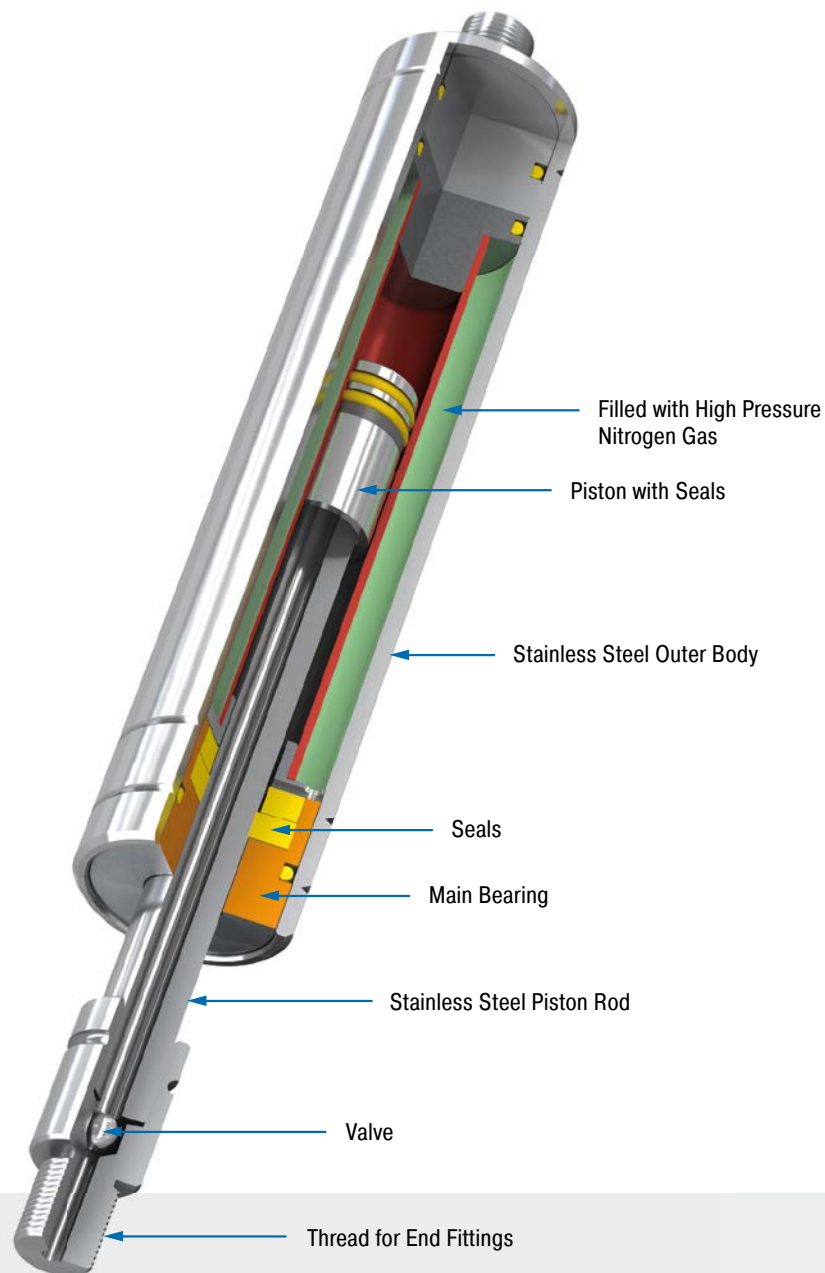

### Technical Data

**Traction force:** 9 lbs to 1,124 lbs

**Piston rod diameter:** Ø 0.16 in to Ø 1.10 in

**Progression:** Approx. 11 % to 45 %

**Lifetime:** Approx. 50,000 cycles

**Operating temperature range:** -4 °F to +176 °F

**Material:** Outer body, Piston rod, End fittings: Stainless steel (1.4301/1.4305, AISI 304/303 and 1.4404/1.4571, AISI 316L/316Ti)

**Operating fluid:** Nitrogen gas

**Mounting:** With piston rod upwards.

**End position damping length:** Without damping. For end position damping use damping material (e.g. TUBUS or SLAB).

**Positive stop:** External positive stop in the pulling direction provided by the customer.

**Application field:** Hoods, Shutters, Machine housing, Conveyor systems, Control boxes, Furniture industry, Shipbuilding, Food industry, Pharmaceutical industry, Folding elements

**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

**On request:** Special oils and other special options. Alternative accessories. Traction gas springs with end position damping also available on request. Other traction gas springs material 1.4404/1.4571, AISI 316L/316Ti (V4A) available on request.



Valve Technology, Stainless Steel, Traction force 11 lbs to 34 lbs (extended up to 41 lbs)

### End Fitting

### Standard Dimensions

### End Fitting

**B3.5** Stud Thread **B3.5**

**A3.5-V4A** Eye **A3.5-V4A**  
max. force 83 lbs

**C3.5-V4A** Angle Ball Joint **C3.5-V4A**  
max. force 83 lbs

**D3.5-V4A** Clevis Fork **D3.5-V4A**  
max. force 83 lbs

**G3.5-V4A** Ball Socket **G3.5-V4A**  
max. force 83 lbs

**Adjuster Knob DE-GAS-3.5**  
See page 191.

**Performance and Dimensions**

TYPES	Stroke inch	L retracted inch	Traction force max. lbs
GZ-15-20-V4A	0.79	3.43	34
GZ-15-40-V4A	1.57	4.21	34
GZ-15-50-V4A	1.97	4.61	34
GZ-15-60-V4A	2.36	5.00	34
GZ-15-80-V4A	3.15	5.79	34
GZ-15-100-V4A	3.94	6.57	34
GZ-15-120-V4A	4.72	7.36	34
GZ-15-150-V4A	5.91	8.54	34


**Ordering Example**

**GZ-15-150-AC-V-150-V4A**

Type (Pull Type) \_\_\_\_\_  
 Body 0.61" (15.6 mm) \_\_\_\_\_  
 Stroke 5.91" (150 mm) \_\_\_\_\_  
 Piston Rod End Fitting A3.5-V4A \_\_\_\_\_  
 Body End Fitting C3.5-V4A \_\_\_\_\_  
 Adjustable (V) \_\_\_\_\_  
 Traction Force F<sub>1</sub> 34 lbs (150 N) \_\_\_\_\_  
 Material (1.4404/1.4571, AISI 316L/316Ti, V4A) \_\_\_\_\_

**Mounting accessories see from page 220.**

### GZ-15-V4A

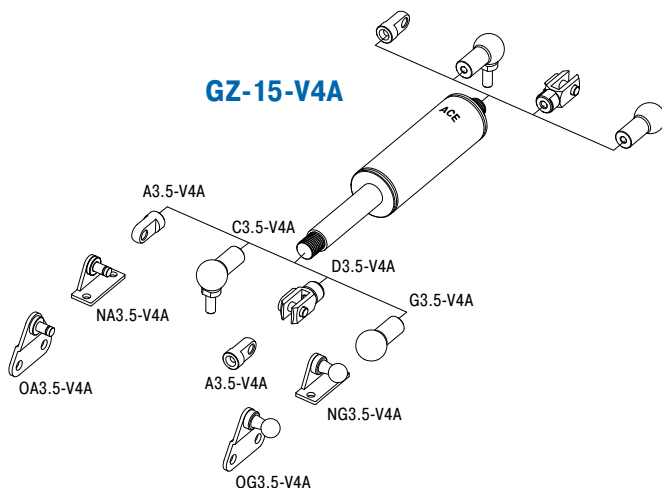

### Technical Data

**Traction force:** 11 lbs to 34 lbs (extended up to 41 lbs)

**Progression:** Approx. 11 % to 21 %

**Lifetime:** Approx. 50,000 cycles

**Operating temperature range:** -4 °F to +176 °F

**Material:** Outer body, Piston rod, End fittings: Stainless steel (1.4404/1.4571, AISI 316L/316Ti)

**Mounting:** With piston rod upwards.

**End position damping length:** Without damping. For end position damping use damping material (e.g. TUBUS or SLAB).

**Positive stop:** External positive stop in the pulling direction provided by the customer.

**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

Valve Technology, Stainless Steel, Traction force 9 lbs to 79 lbs (extended up to 101 lbs)

End Fitting

Standard Dimensions

End Fitting

**B8** Stud Thread **B8**

**A8-VA** Eye **A8-VA** max. force 351 lbs

**C8-VA** Angle Ball Joint **C8-VA** max. force 256 lbs

**D8-VA** Clevis Fork **D8-VA** max. force 351 lbs

**E8-VA** Swivel Eye **E8-VA** max. force 351 lbs

**G8-VA** Ball Socket **G8-VA** max. force 256 lbs

**Rod Shroud W8-19-VA**

**Performance and Dimensions**

TYPES	Stroke inch	L retracted inch	Traction force max. lbs
GZ-19-30-VA	1.18	5.12	79
GZ-19-50-VA	1.97	5.91	79
GZ-19-100-VA	3.94	7.87	79
GZ-19-150-VA	5.91	9.84	79
GZ-19-200-VA	7.87	11.81	79
GZ-19-250-VA	9.84	13.78	79

**Ordering Example** **GZ-19-150-AC-V-150-VA**

Type (Pull Type) \_\_\_\_\_

Body 0.75" (19 mm) \_\_\_\_\_

Stroke 5.91" (150 mm) \_\_\_\_\_

Piston Rod End Fitting A8-VA \_\_\_\_\_

Body End Fitting C8-VA \_\_\_\_\_

Adjustable (V) \_\_\_\_\_


Traction Force F<sub>1</sub> 34 lbs (150 N) \_\_\_\_\_

Material (1.4301/1.4305, AISI 304/303, VA) \_\_\_\_\_

**Mounting accessories see from page 220.**

**Adjuster Knob DE-GAS-8**  
See page 191.

**GZ-19-VA**

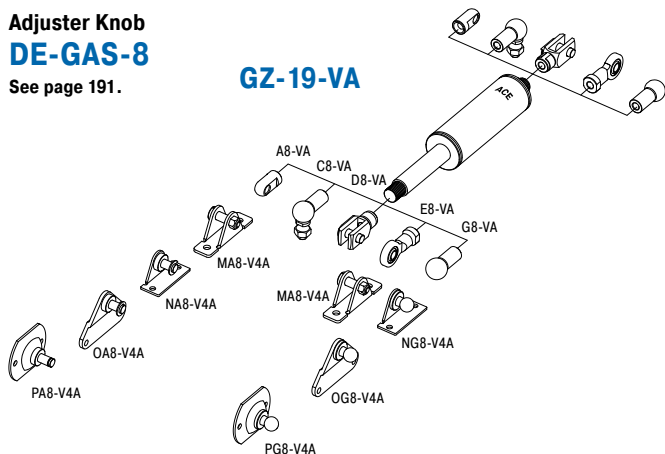

**Technical Data**

- Traction force:** 9 lbs to 79 lbs (extended up to 101 lbs)
- Progression:** Approx. 23 % to 28 %
- Lifetime:** Approx. 50,000 cycles
- Operating temperature range:** -4 °F to +176 °F
- Material:** Outer body, Piston rod, End fittings: Stainless steel (1.4301/1.4305, AISI 304/303)
- Mounting:** With piston rod upwards.
- End position damping length:** Without damping. For end position damping use damping material (e.g. TUBUS or SLAB).
- Positive stop:** External positive stop in the pulling direction provided by the customer.
- End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

Issue 04.2018 – Specifications subject to change

Valve Technology, Stainless Steel, Traction force 34 lbs to 270 lbs (extended up to 351 lbs)

### End Fitting

### Standard Dimensions

### End Fitting

**B10** Stud Thread **B10**

**A10-VA** Eye **A10-VA** max. force 854 lbs

**C10-VA** Angle Ball Joint **C10-VA** max. force 393 lbs

**D10-VA** Clevis Fork **D10-VA** max. force 854 lbs

**E10-VA** Swivel Eye **E10-VA** max. force 854 lbs

**Rod Shroud W10-28-VA**

**Adjuster Knob DE-GAS-10**  
See page 191.

**Performance and Dimensions**

TYPES	Stroke inch	L retracted inch	Traction force max. lbs
GZ-28-50-VA	1.97	6.50	270
GZ-28-100-VA	3.94	8.46	270
GZ-28-150-VA	5.91	10.43	270
GZ-28-200-VA	7.87	12.40	270
GZ-28-250-VA	9.84	14.37	270
GZ-28-300-VA	11.81	16.34	270
GZ-28-350-VA	13.78	18.31	270
GZ-28-400-VA	15.75	20.28	270
GZ-28-450-VA	17.72	22.24	270
GZ-28-500-VA	19.69	24.21	270
GZ-28-550-VA	21.65	26.18	270
GZ-28-600-VA	23.62	28.15	270


**Ordering Example**

**GZ-28-150-EE-V-800-VA**

Type (Pull Type) \_\_\_\_\_  
 Body 1.10" (28 mm) \_\_\_\_\_  
 Stroke 5.91" (150 mm) \_\_\_\_\_  
 Piston Rod End Fitting E10-VA \_\_\_\_\_  
 Body End Fitting E10-VA \_\_\_\_\_  
 Adjustable (V) \_\_\_\_\_  
 Traction Force F<sub>1</sub> 180 lbs (800 N) \_\_\_\_\_  
 Material (1.4301/1.4305, AISI 304/303, VA) \_\_\_\_\_

**Mounting accessories see from page 220.**

Issue 04.2018 – Specifications subject to change

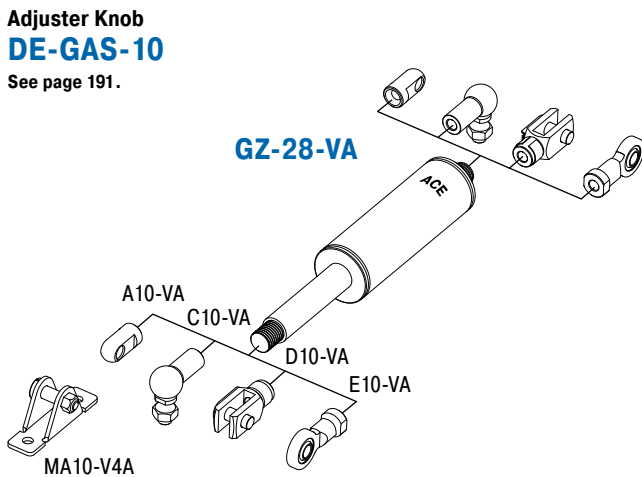

### Technical Data

**Traction force:** 34 lbs to 270 lbs (extended up to 351 lbs)

**Progression:** Approx. 29 % to 30 %

**Lifetime:** Approx. 50,000 cycles

**Operating temperature range:** -4 °F to +176 °F

**Material:** Outer body, Piston rod, End fittings: Stainless steel (1.4301/1.4305, AISI 304/303)

**Mounting:** With piston rod upwards.

**End position damping length:** Without damping. For end position damping use damping material (e.g. TUBUS or SLAB).

**Positive stop:** External positive stop in the pulling direction provided by the customer.


**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

Valve Technology, Stainless Steel, Traction force 112 lbs to 1,124 lbs (extended up to 1,630 lbs)

End Fitting

Standard Dimensions

End Fitting

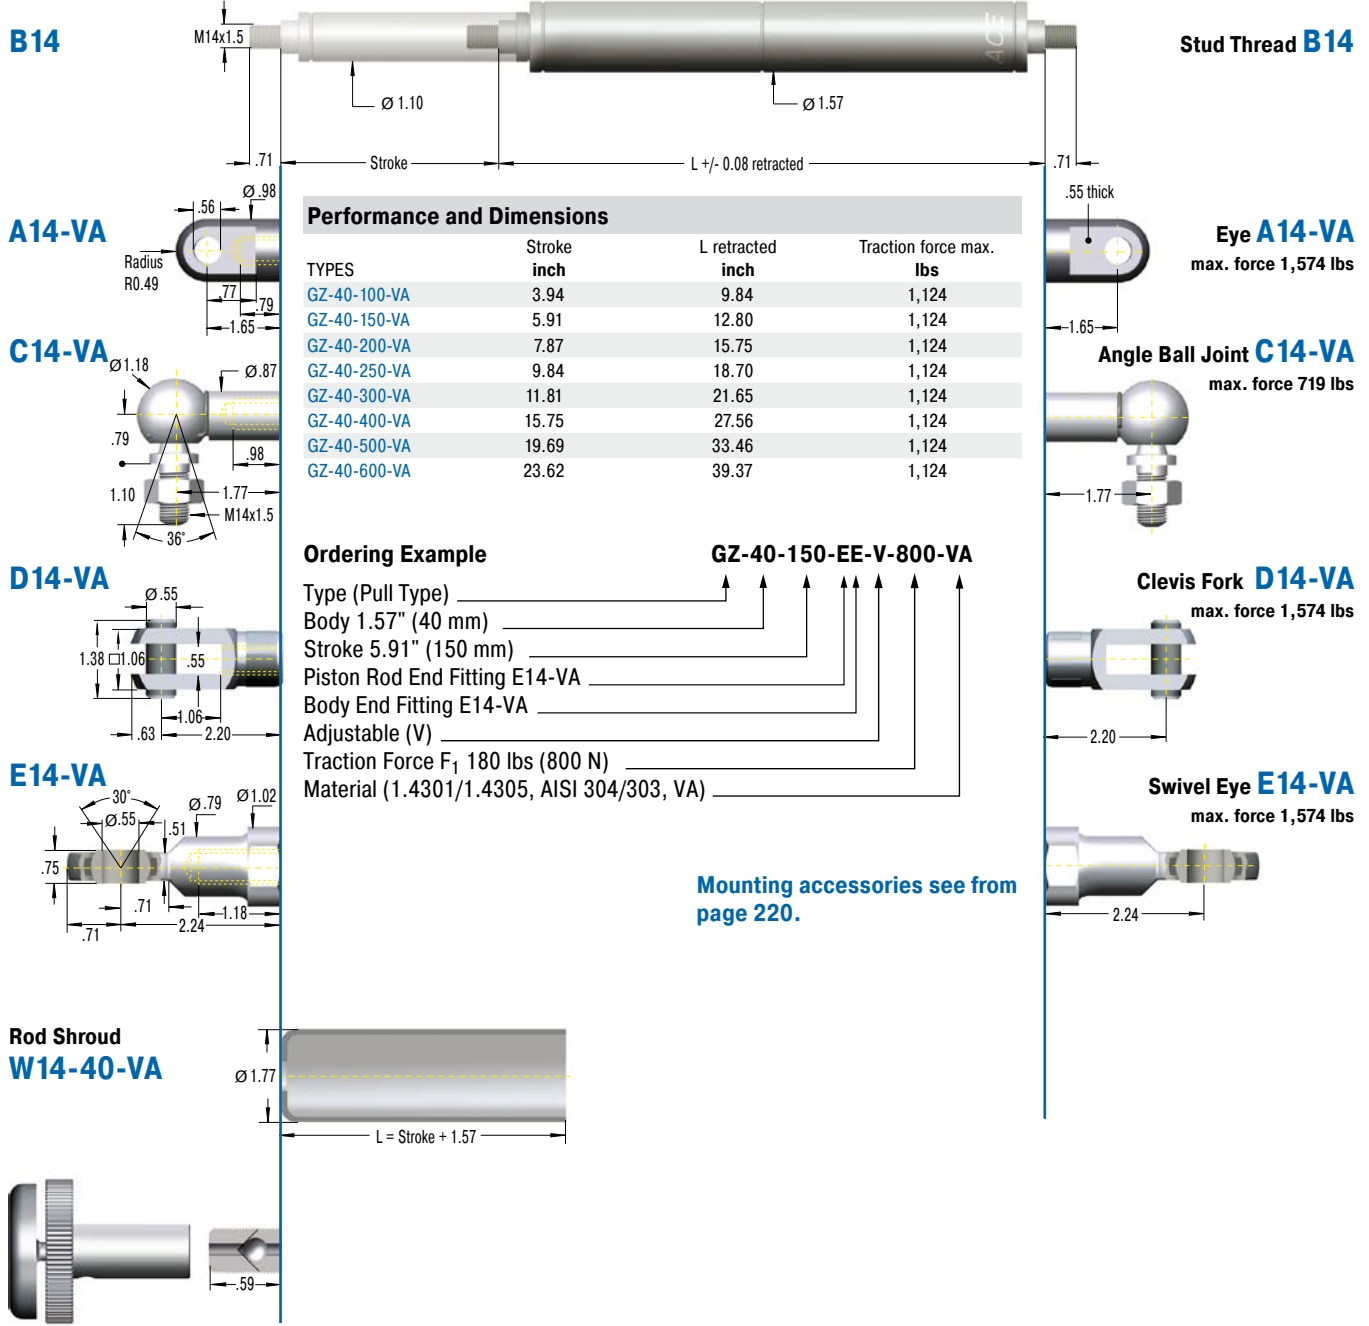

**Performance and Dimensions**


TYPES	Stroke inch	L retracted inch	Traction force max. lbs
GZ-40-100-VA	3.94	9.84	1,124
GZ-40-150-VA	5.91	12.80	1,124
GZ-40-200-VA	7.87	15.75	1,124
GZ-40-250-VA	9.84	18.70	1,124
GZ-40-300-VA	11.81	21.65	1,124
GZ-40-400-VA	15.75	27.56	1,124
GZ-40-500-VA	19.69	33.46	1,124
GZ-40-600-VA	23.62	39.37	1,124

**Ordering Example** **GZ-40-150-EE-V-800-VA**

Type (Pull Type) \_\_\_\_\_  
 Body 1.57" (40 mm) \_\_\_\_\_  
 Stroke 5.91" (150 mm) \_\_\_\_\_  
 Piston Rod End Fitting E14-VA \_\_\_\_\_  
 Body End Fitting E14-VA \_\_\_\_\_  
 Adjustable (V) \_\_\_\_\_  
 Traction Force F<sub>1</sub> 180 lbs (800 N) \_\_\_\_\_  
 Material (1.4301/1.4305, AISI 304/303, VA) \_\_\_\_\_

Mounting accessories see from page 220.

**Adjuster Knob**  
**DE-GAS-14**  
 See page 191.

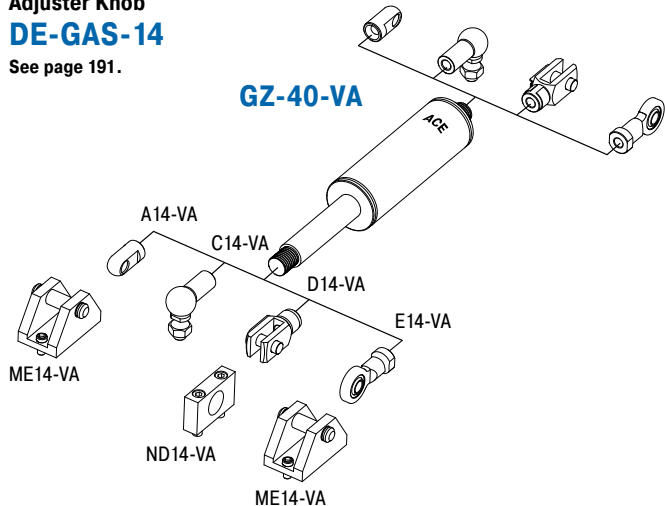

**Technical Data**

- Traction force:** 112 lbs to 1,124 lbs (extended up to 1,630 lbs)
- Progression:** Approx. 43 % to 45 %
- Lifetime:** Approx. 50,000 cycles
- Operating temperature range:** -4 °F to +176 °F
- Material:** Outer body, Piston rod, End fittings: Stainless steel (1.4301/1.4305, AISI 304/303)
- Mounting:** With piston rod upwards.
- End position damping length:** Without damping. For end position damping use damping material (e.g. TUBUS or SLAB).
- Positive stop:** External positive stop in the pulling direction provided by the customer.
- End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

Issue 04.2018 – Specifications subject to change

### Stainless Steel Gas Springs (Pull Type), V4A

TYPES	Stroke inch	L retracted inch	Dimensions see Page
GZ-19-30-V4A	1.18	5.12	184
GZ-19-50-V4A	1.97	5.91	184
GZ-19-100-V4A	3.94	7.87	184
GZ-19-150-V4A	5.91	9.84	184
GZ-19-200-V4A	7.87	11.81	184
GZ-19-250-V4A	9.84	13.78	184
GZ-28-50-V4A	1.97	6.50	185
GZ-28-100-V4A	3.94	8.46	185
GZ-28-150-V4A	5.91	10.43	185
GZ-28-200-V4A	7.87	12.40	185
GZ-28-250-V4A	9.84	14.37	185
GZ-28-300-V4A	11.81	16.34	185
GZ-28-350-V4A	13.78	18.31	185
GZ-28-400-V4A	15.75	20.28	185
GZ-28-450-V4A	17.72	22.24	185
GZ-28-500-V4A	19.69	24.21	185
GZ-28-550-V4A	21.65	26.18	185
GZ-28-600-V4A	23.62	28.15	185
GZ-40-100-V4A	3.94	9.84	186
GZ-40-150-V4A	5.91	12.80	186
GZ-40-200-V4A	7.87	15.75	186
GZ-40-250-V4A	9.84	18.70	186
GZ-40-300-V4A	11.81	21.65	186
GZ-40-400-V4A	15.75	27.56	186
GZ-40-500-V4A	19.69	33.46	186
GZ-40-600-V4A	23.62	39.37	186

### Stainless Steel Accessories, V4A

TYPES	Dimensions see Page
A5-V4A	222
C5-V4A	222
D5-V4A	222
E5-V4A	222
G5-V4A	222
A8-V4A	223
C8-V4A	223
D8-V4A	223
E8-V4A	223
G8-V4A	224
A10-V4A	224
C10-V4A	224
D10-V4A	224
E10-V4A	224
A14-V4A	225
C14-V4A	225
D14-V4A	225
E14-V4A	225

## We'll Size Industrial Gas Springs for You

### And we'll provide all necessary information for installation

To obtain the optimum operation with minimal hand force, gas spring must be properly sized and the mounting points have to be optimally placed.

#### It is important to identify the following points:

- gas spring size
- required gas spring stroke
- mounting points on flap and frame
- extended length of the gas spring
- required extension force
- hand forces throughout the complete movement on the flap

With our free calculation service you can eliminate the time-consuming calculation and send us your details by fax or e-mail. Just complete the information shown on the following page. Please attach a sketch of your application (a simple hand sketch is sufficient) in side view. Our application engineers will determine the optimum gas springs and mounting points and calculate the ideal situation to satisfy your requirements.

You will receive a quotation showing the opening and closing forces and our recommended mounting points to suit your application.

#### Example of a Calculation Offer

Input data - Identification data			
Start angle	$\alpha$ : 0 °	Temperature	: 68 °F
Open angle	$\alpha$ : 90 °	Progression	: 32 %
Rd. ctr.grvty.	RM: 9.02 in.	Friction	: 20 N
Mass	m: 25 lb.	Ext. length	: 8.6 in.
No. gas springs	n: 2		
Rd. handforce	RB: 17.99 in.		
Dist. of fitting	L1: 0.79 in.		


#### Required user hand-forces

F1-F2/F3-F4=Hand forces for opening/closing

Angle [°]	F1-F2 [lbs]	F3-F4 [lbs]	Length [in.]
0	-3	-2	5.75
20	-3	-2	6.57
40	-3	-2	7.32
60	-1	0	7.95
80	1	2	8.43
90	2	3	8.58

F1-F4 positive requires clockwise hand force

F1-F4 negative requires counter-clockwise hand force

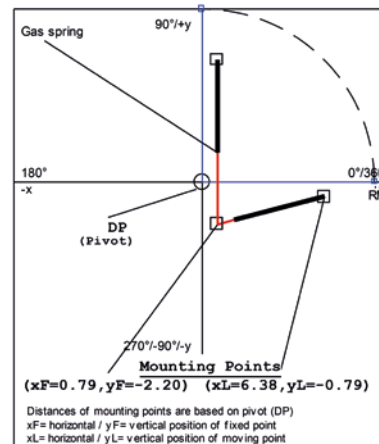

### Input Data

Gas Spring Push type  Gas Spring Pull type

#### Gas spring fixing points

The fixed point of the frame and the moving point of the flap are critical for the optimum operation.

Please attach a sketch of your application!  
(A few lines with dimensions are sufficient)








Moving mass\* m \_\_\_\_\_ lbs  
 Number of gas springs in parallel\* n \_\_\_\_\_ pcs  
 Number of movements\* \_\_\_\_\_ /day  
 Ambient temperature T \_\_\_\_\_ °F

#### If not shown by the sketch:

Radius of center of gravity  $R_M$  \_\_\_\_\_ inches  
 Radius of hand force  $R_H$  \_\_\_\_\_ inches  
 Starting angle  $\alpha_M$  \_\_\_\_\_ °  
 Opening angle  $\alpha$  \_\_\_\_\_ °

\* Compulsory information


### Desired Mounting Fittings

- | End Fitting                |   | End Fitting                |
|----------------------------|---|----------------------------|
| <input type="checkbox"/> A |  | <input type="checkbox"/> A |
| <input type="checkbox"/> B |  | <input type="checkbox"/> B |
| <input type="checkbox"/> C |  | <input type="checkbox"/> C |
| <input type="checkbox"/> D |  | <input type="checkbox"/> D |
| <input type="checkbox"/> E |  | <input type="checkbox"/> E |
| <input type="checkbox"/> F |  | <input type="checkbox"/> F |
| <input type="checkbox"/> G |  | <input type="checkbox"/> G |


The end fittings are interchangeable

e.g. -CE: C = Angle Ball Joint, E = Swivel Eye

### Hood

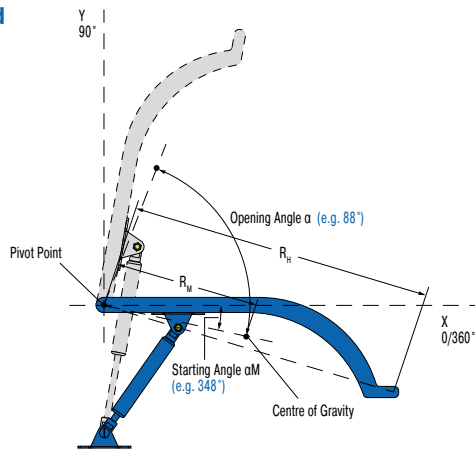

### Flap

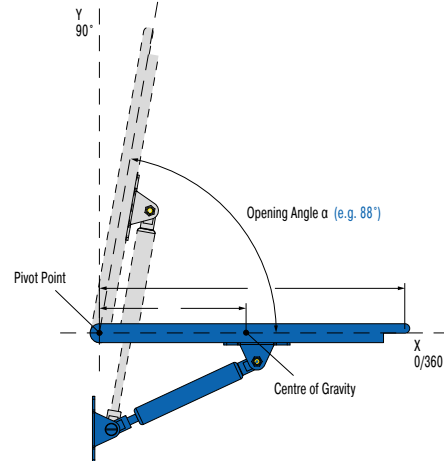

Please send us a sketch with dimensions of your application!  
Without this sketch we won't be able to calculate.

Comments	
Requirement per year	
Machine type / reference	

### Sender

Company		Dept.	
Address		Name	
ZIP / City		Telephone	
Website		E-Mail	

Please complete and fax or email to: (248) 476-2470 or [applications@acecontrols.com](mailto:applications@acecontrols.com)

## Mounting and Safety Instructions

### Filling

Gas springs are filled with pure nitrogen gas. Nitrogen is an inert gas that does not burn or explode and is not poisonous. The internal pressure of gas springs can be up to 300 bar (4,350 psi). Do not attempt to open or modify them!

### Gas springs are maintenance-free!

ACE gas springs will operate in ambient temperatures from -4 °F to +176 °F.

We can equip our springs with special seals to withstand temperatures as low as -49 °F or as high as +392 °F.

Gas springs should not be placed over heat or in open fire!

ACE gas springs can be stored in any position. Pressure lost through long storage is not to be expected. There are no known negative effects of long-term storage, but there may be a sticking effect the first time you compress a spring. This may require a higher initial force to operate the gas spring for the first time (initial breakaway force).

### Mounting

Gas springs should be installed with the piston rod downwards. This position ensures best damping quality. ACE gas springs include an integrated grease chamber which allows for alternative mounting opportunities.

The tolerance for the installation length is generally deemed to be  $\pm 0.08$  in. If very high demands are placed on durability and stability, please avoid the combination of small diameter + long stroke + high force.

The filling tolerance is -4.50 lbs to 9.00 lbs or 5 % to 7 %. Depending on size and extension force the tolerances can differ.

### Life Time

Generally, ACE gas springs are tested to 70,000 to 100,000 complete strokes. This is equivalent to the seal lifetime (depending on model size) to a distance travelled of 6.21 miles (lifetime of traction gas springs approx. 1.24 miles). During these tests the gas spring must not lose more than 5 % of its pressure. Depending upon the application and operating environment, the service life of these gas springs may be much longer. In practice 500,000 strokes or more have been achieved on some applications.

### Disposal/Recycling

Please ask for our disposal recommendations.

## Warnings and Liability

All gas springs are marked with the part number, the production date and a warning sign "Do not open high pressure".

We are not responsible for any damages of any kind that arises due to goods that are not marked accordingly.



## Valve Actuation with ACE DE-GAS

### Simple, safe and reliable

#### De-gassing for controlled force reduction on valve gas springs

The reduction is made by screwing the DE-Gas on the male screwed end of the gas spring. The drain process is possible through light actuation of the push button. If too much nitrogen is discharged, the gas spring can be refilled by ACE.

#### Adjustment

1. Hold gas spring valve up.
2. Insert DE-GAS adjuster knob on thread of the valve.
3. Press the DE-GAS adjuster knob with light hand force until you can hear the nitrogen escaping. Press only briefly to avoid too much nitrogen being discharged.
4. After adjustment, remove the DE-GAS adjuster knob, mount the end fittings and test the gas spring in your application. If necessary repeat the procedure.

If you use 2 gas springs in parallel, both gas springs should have the same force to avoid bending forces or side load on the application. If necessary return to ACE to refill both gas springs to the same (average) force.

If too much nitrogen is discharged, the units can be returned to ACE for re-gassing.



DE-GAS

You can also visit our Youtube channel at [www.youtube.com/user/acecontrolsglobal](http://www.youtube.com/user/acecontrolsglobal)  
Here, among other things you will find an ACETips video on the topic of DE-GAS!

## Gas Spring Refilling Kit

### Flexible and easy to use

The ACE gas spring refilling kit offers you the opportunity to fill gas springs on location or adapt them individually. The refilling kit is equipped with all the parts you need to fill gas springs. Very precise filling of the gas springs is possible using the digital manometer. The table for determining the filling pressure of the gas springs is included with the case. The only thing missing from the delivery is the nitrogen.



The refilling kit contains all filling bells and adjuster knobs for the current ACE gas spring range.

Gas springs filled with the refilling kit must be measured on a calibrated measurement system by ACE for repeat production.

The refilling kit suits 2,900 psi nitrogen bottles with a thread of W24.32x1/14". Other connections are available upon request.

Part number: **GS-FK-C**

# Hydraulic Dampers

## Multi-talent in speed control

**The ACE hydraulic dampers are similar in appearance to our industrial gas springs but are adjusted in the end position and work differently to the DVC family with individual speed adjusters for the push and pull direction. This provides users with the maximum flexibility.**

Whether used as drive compensation or safety element, the retraction and extension speed of these ACE solutions can always be precisely set. This means that the speed of movement can be controlled, synchronization regulated in both directions and pivoting loads can be compensated. Depending on the model, the push and pull forces are between 6.75 lb to 2,023 lb (30 N and 40,000 N). These maintenance-free, ready-to-install products are available in body diameters of 0.47 in to 2.75 in (12 mm to 70 mm) and in stroke lengths up to 31.50 in (800 mm).



## Hydraulic Dampers



### DVC-32 and DVC-2 to DVC-6

Page 194

Adjustable, Without Free Travel  
**Multi-directional speed adjustment**  
 Cylinder speed controls, Absorption control, Finishing and processing centers



### HBD-15 to HBD-40

Page 196

Adjustable  
**Regulation at the highest level**  
 Finishing and processing centers, Machine housing, Hoods, Shutters



### HB-12 to HB-70

Page 202

Adjustable  
**Linear motion control**  
 Conveyor systems, Transport systems, Furniture industry, Locking systems

Constant speed rates

Sensitive adjustment

High quality and long lifetime

Easy to mount



## DVC-32 and DVC-2 to DVC-6

### Multi-directional speed adjustment

#### Adjustable, Without Free Travel


**Compression and extension force 9.44 lbs to 450 lbs**

**Stroke 2.00 in to 6.00 in**

Separately regulated in any stroke position: The hydraulic dampers of the product family DVC-32 and DVC-2 to DVC-6 are the first dampers to provide precise, independent, external adjustment of in-and-out speeds. With their individual adjustments for the push and pull direction as well as the bi-directional action, these are suitable as safety or control elements.

The great number of mounting accessories makes assembly of these ACE hydraulic dampers easier and allows these maintenance-free, ready-to-install and self-contained systems universally applicable. Qualitatively high grade, and at the same time simple to use; one of their uses is to absorb swinging loads.

These velocity controllers are used in the automotive sector, automation and machine building as well as in the electronics industry.

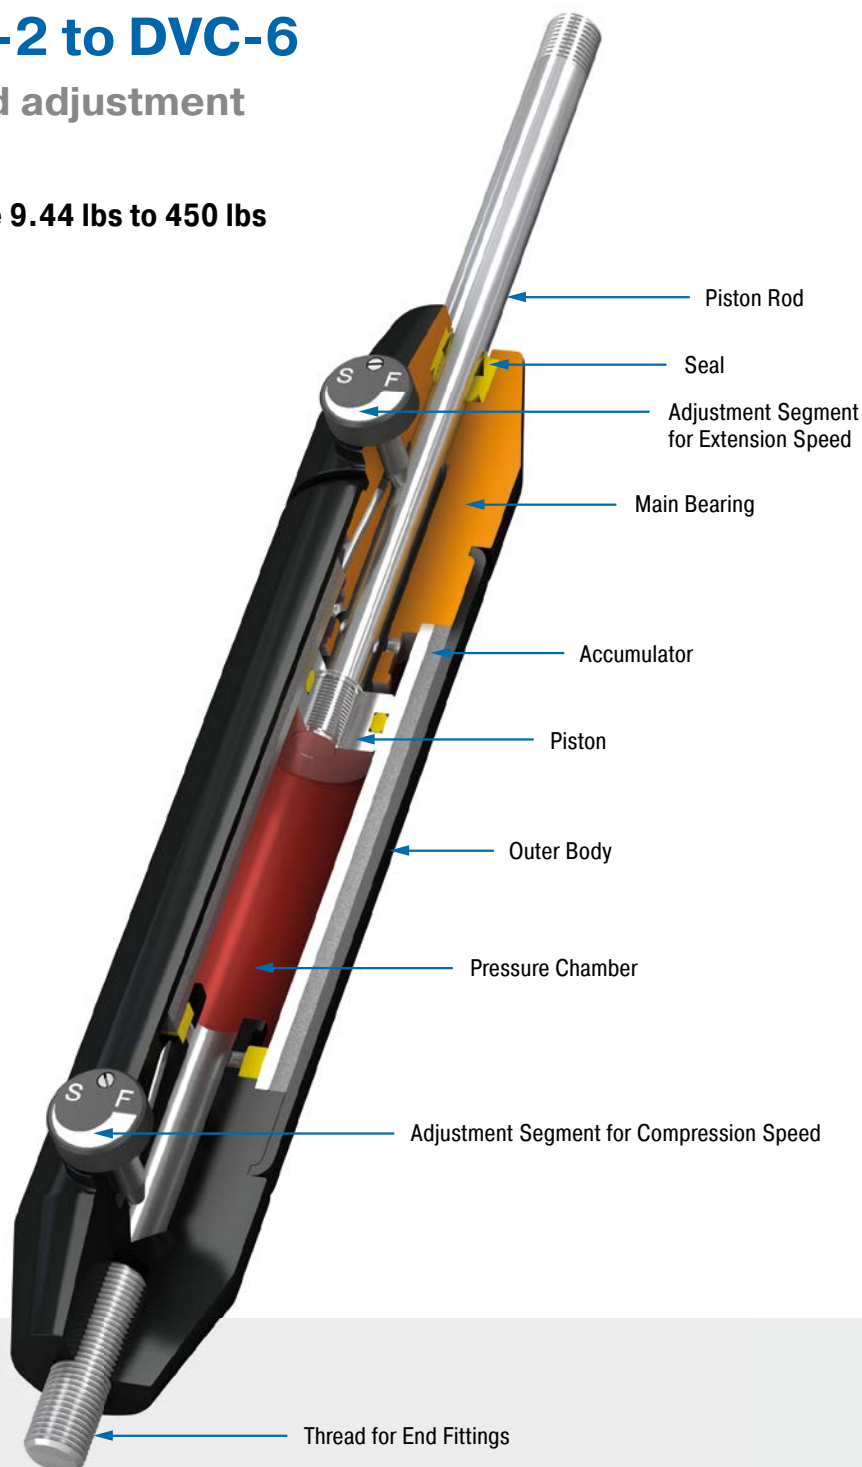

#### Technical Data

**Compression and extension force:**  
9.44 lbs to 450 lbs

**Outer body diameter:** Ø 1.26 in

**Piston rod diameter:** Ø 0.31 in

**Lifetime:** Approx. 250,000 cycles

**Operating temperature range:** 32 °F to 149 °F

**Adjustment:** Steplessly adjustable

**Positive stop:** External positive stops 0.04 in to 0.06 in before the end of stroke provided by the customer.

**Damping medium:** Automatic Transmission Fluid (ATF)

**Material:** Outer body: Coated aluminium; Piston rod: Hard chrome plated steel; End fittings: Zinc plated steel

**Mounting:** In any position

**Application field:** Cylinder speed controls, Absorption control, Finishing and processing centers

**Note:** Increased break-away force if unit has not moved for some time. Damping force can be adjusted after installation.

**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

**On request:** Special oils and other special options. Alternative accessories available on request.


Adjustable, Without Free Travel, Compression and extension force 9.44 lbs to 450 lbs

### End Fitting

### Standard Dimensions

### End Fitting

**A8**

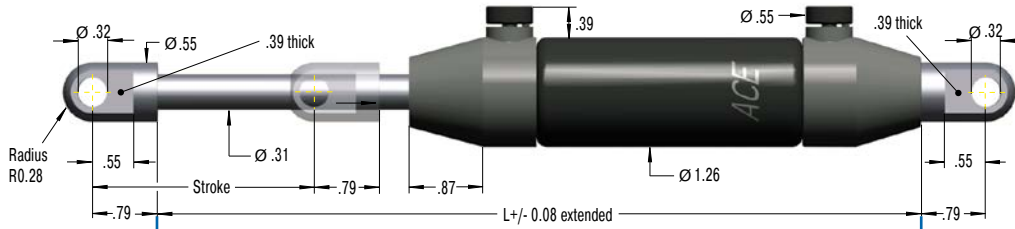

**Eye A8**  
max. force 674 lbs

**B8**




### Performance and Dimensions

TYPES	Stroke inch	L extended inch	<sup>1</sup> Compression force max. lbs
DVC-32-50	2.00	9.45	300
DVC-32-100	4.00	13.39	350
DVC-32-150	6.00	17.32	450

<sup>1</sup> Max. extension force for all stroke lengths 449.62 lbs.


**Stud Thread B8**

**C8**




**Angle Ball Joint C8**  
max. force 270 lbs  
Also available with  
UNF thread 5/16-18.  
Order G5/16.

**D8**



**Clevis Fork D8**  
max. force 674 lbs

**E8**



**Swivel Eye E8**  
max. force 674 lbs

### Ordering Example

**DVC-32-50-DD-CCO**

Type (Hydraulic Damper) \_\_\_\_\_  
 Body Ø 1.26" (32 mm) omitted at DVC-2 to DVC-6 \_\_\_\_\_  
 Stroke 2" (50 mm) \_\_\_\_\_  
 Piston Rod End Fitting D8 \_\_\_\_\_  
 Body End Fitting D8 \_\_\_\_\_  
 Velocity Controls (Omit prefix for controlled, both directions) \_\_\_\_\_


### Model Type Prefix

- : Controlled, both directions  
 CCO: Controlled, compression only  
 CTO: Controlled, tension only

**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

**Mounting accessories see from page 212.**

### DVC-2 to DVC-6

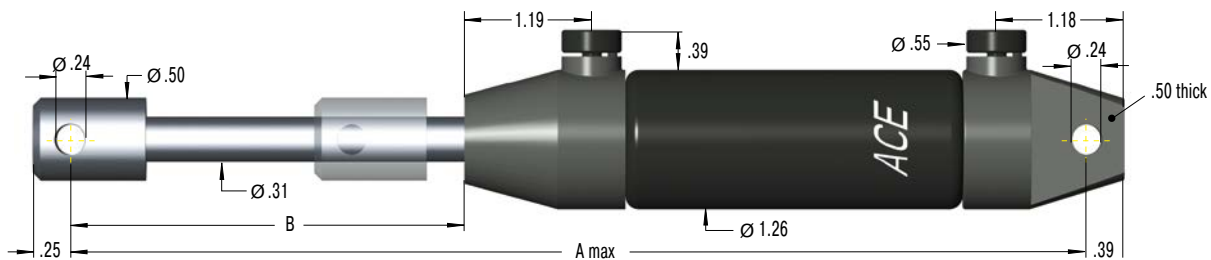

### Performance and Dimensions

TYPES	Stroke inch	A max. inch	B inch	Compression force max. lbs	Traction force max. lbs
DVC-2	2.00	9.81	2.96	450	450
DVC-4	4.00	13.81	4.94	450	450
DVC-6	6.00	17.81	6.94	450	450

## HBD-15 to HBD-40

### Regulation at the highest level

#### Adjustable


**Compression and extension force 8 lbs to 2,248 lbs**

**Stroke 0.98 in to 31.5 in**

ACE Controls HBD Hydraulic Dampers are maintenance-free, self-contained and sealed units. They are available with body diameters from 0.59" (15 mm) to 1.57" (40 mm) and with stroke lengths of up to 31.5" (800 mm). Unlike standard Hydraulic Dampers that include free travel up to 20 % of stroke, these dependable units have no free travel and are ideal for applications that require this level of performance. Double-acting Hydraulic Dampers are standard. However, a single acting design is available. Adjustment is easily achieved by pulling and turning the rod until the desired damping speed is achieved. The travel speed is adjustable and remains constant throughout the stroke.

The single acting version is controllable in one direction only, with free-flow in the opposite direction. A built-in antilock guard allows adjustment to be made at any damping rate without unit lock up. These reliable units offer long life-cycle performance. A variety of end fittings are available for ease of operation and installation, and are included.

HBD hydraulic dampers are used for process control, machine guards, lids, hatches, fire safety doors, arms for medical equipment, conveyors, swinging loads, machine tools, lift gates, drill feed control, amusement park rides, and more.

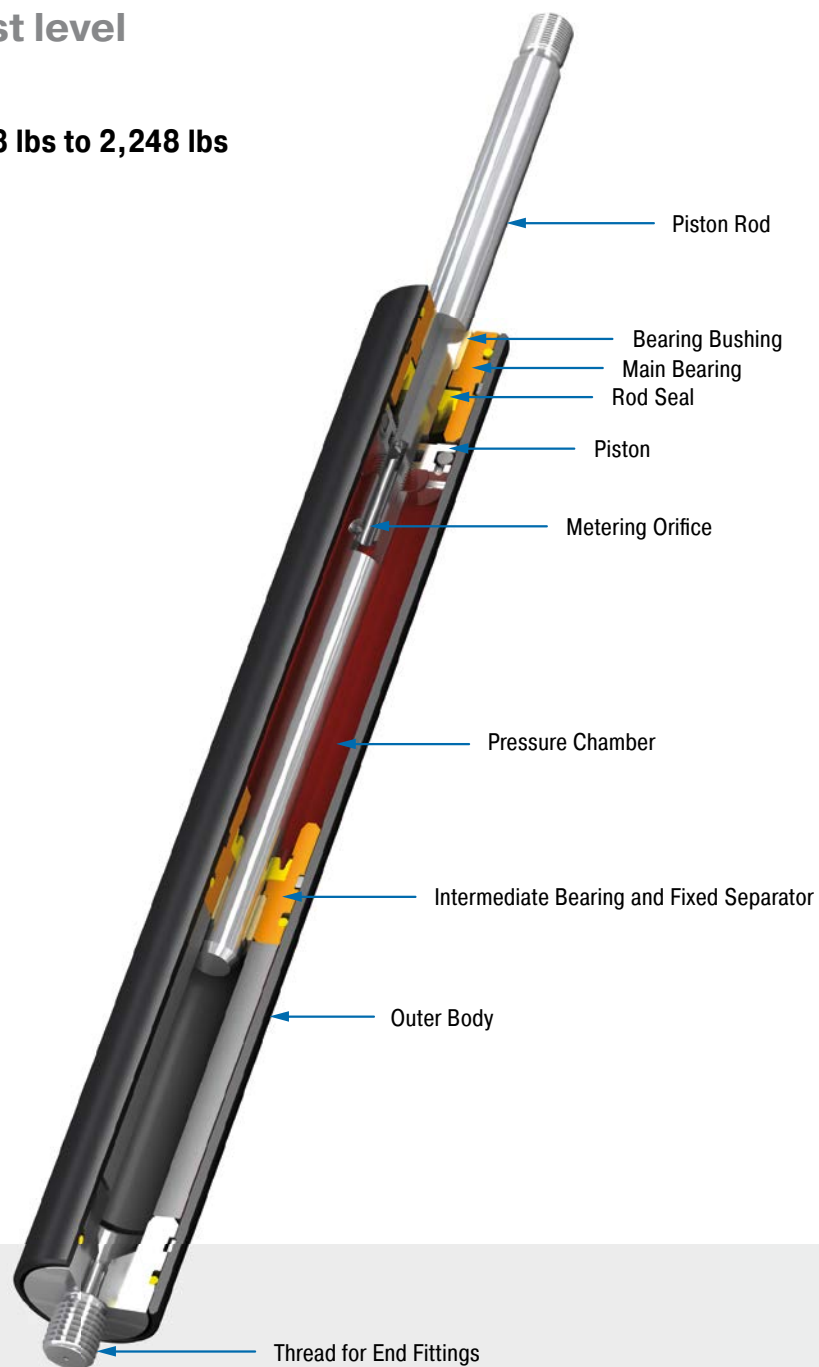

#### Technical Data

**Compression and extension force:** 8 lbs to 2,248 lbs

**Outer body diameter:** Ø 0.59 in to Ø 1.57 in

**Piston rod diameter:** Ø 0.24 in to Ø 0.55 in

**Lifetime:** Approx. 250,000 cycles

**Free travel:** These units have no free travel and are ideal for applications that require this level of performance.

**Operating temperature range:** -4 °F to 176 °F

**Adjustment:** Pull the piston rod out to its fully extended position. While pulling on the rod, turn it clockwise or counter-clockwise until the desired damping is achieved. The adjustment

is multi-turn and correct damping may require several trial and error adjustments. A built-in antilock guard allows adjustments to be made at any damping rate without unit lock up.

**Positive stop:** External positive stops 0.04 in to 0.06 in before the end of stroke provided by the customer.

**Damping medium:** Petroleum oil

**Material:** Outer body: Black anodized aluminium; Piston rod: Hard chrome plated steel; End fittings: Zinc plated steel

**Mounting:** In any position

**Application field:** Finishing and processing centers, Machine housing, Hoods, Shutters,

Fire safety doors, Medical technology, Conveyor systems, Swivel units, Tool machines, Lift doors

**Note:** Increased break-away force if unit has not moved for some time.

**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

**Safety information:** Mechanical Stop required 0.04 in to 0.06 in before end of stroke.

**On request:** Special oils, damping characteristics, and stroke lengths. Alternative accessories available on request.

Adjustable, Compression and extension force 8 lbs to 180 lbs

### End Fitting

### Standard Dimensions

### End Fitting

**Performance and Dimensions**

TYPES	Stroke inch	L extended inch	<sup>1</sup> Compression force max. lbs
HBD-15-25	0.98	5.71	179.85
HBD-15-50	1.97	8.66	179.85
HBD-15-75	2.95	11.61	179.85
HBD-15-100	3.94	14.57	78.68
HBD-15-150	5.91	20.47	67.44

<sup>1</sup> Max. extension force for all stroke lengths 180 lbs.

**Ordering Example**

**HBD-15-150-AA-P**

- Type (Hydraulic Damper)
- Body 0.59" (15 mm)
- Stroke 5.91" (150 mm)
- Piston Rod End Fitting A5
- Body End Fitting A5
- Damping Direction (P = in both directions)

**Model Type Prefix**

- P = Damping in both directions
- N = Damping on in stroke only
- M = Damping on out stroke only
- X = Special model suffix

**Mounting accessories see from page 212.**

### Technical Data

**Compression and extension force:** 8 lbs to 180 lbs

**Free travel:** These units have no free travel and are ideal for applications that require this level of performance.

**Operating temperature range:** -4 °F to 176 °F

**Adjustment:** Pull the piston rod out to its fully extended position. While pulling on the rod, turn it clockwise or counter-clockwise until the desired damping is achieved. The adjustment is multi-turn and correct damping may require several trial and error adjustments. A built-in antilock guard allows adjustments to be made at any damping rate without unit lock up.

**Positive stop:** External positive stops 0.04 in to 0.06 in before the end of stroke provided by the customer.


**Material:** Outer body: Black anodized aluminium; Piston rod: Hard chrome plated steel; End fittings: Zinc plated steel

**Mounting:** In any position

**Note:** Increased break-away force if unit has not moved for some time.

**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

**Safety information:** Mechanical Stop required 0.04 in to 0.06 in before end of stroke.

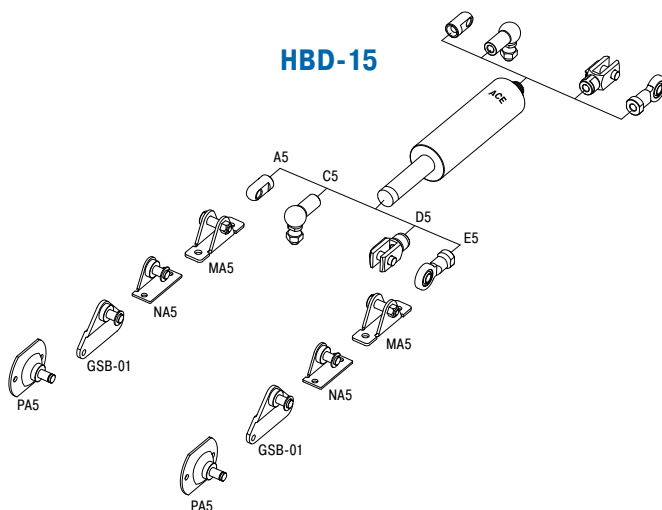


Adjustable, Compression and extension force 12 lbs to 405 lbs

End Fitting

Standard Dimensions

End Fitting

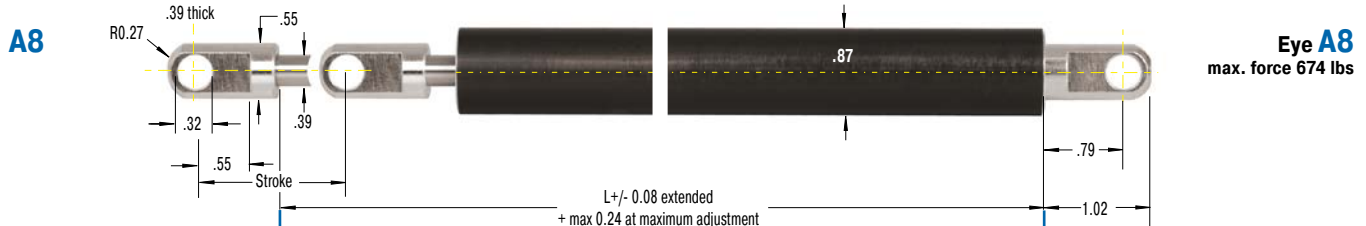

B8

C8

D8

E8

Eye A8  
max. force 674 lbs

Stud Thread B8

Angle Ball Joint C8  
max. force 270 lbs  
Also available with UNF thread 5/16-18. Order G5/16.

Clevis Fork D8  
max. force 674 lbs

Swivel Eye E8  
max. force 674 lbs

**Performance and Dimensions**

TYPES	Stroke inch	L extended inch	1 Compression force max. lbs
HBD-22-50	1.97	9.25	404.66
HBD-22-100	3.94	15.16	404.66
HBD-22-150	5.91	21.06	404.66
HBD-22-200	7.87	26.97	224.81
HBD-22-250	9.84	32.87	224.81
HBD-22-300	11.81	38.78	179.85
HBD-22-350	13.78	44.69	134.89
HBD-22-400	15.75	50.59	89.92

<sup>1</sup> Max. extension force for all stroke lengths 405 lbs.

Ordering Example


HBD-22-150-AA-P

Type (Hydraulic Damper) \_\_\_\_\_  
 Body 0.87" (22 mm) \_\_\_\_\_  
 Stroke 5.90" (150 mm) \_\_\_\_\_  
 Piston Rod End Fitting A8 \_\_\_\_\_  
 Body End Fitting A8 \_\_\_\_\_  
 Damping Direction (P = in both directions) \_\_\_\_\_

Model Type Prefix

- P = Damping in both directions
- N = Damping on in stroke only
- M = Damping on out stroke only
- X = Special model suffix

Mounting accessories see from page 212.

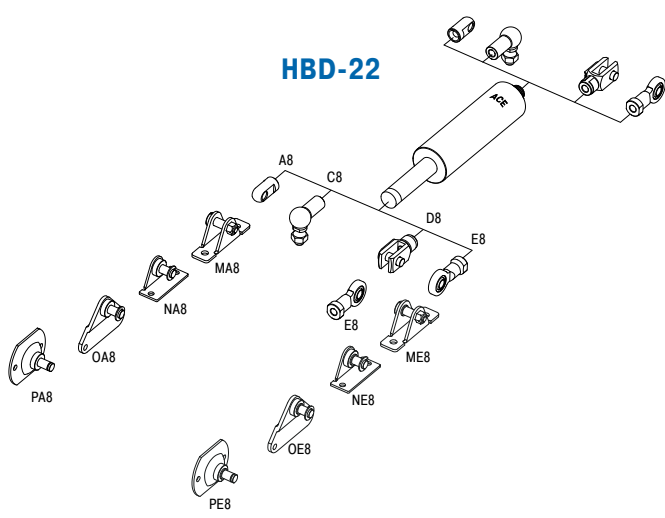

Technical Data

- Compression and extension force:** 12 lbs to 405 lbs
- Free travel:** These units have no free travel and are ideal for applications that require this level of performance.
- Operating temperature range:** -4 °F to 176 °F
- Adjustment:** Pull the piston rod out to its fully extended position. While pulling on the rod, turn it clockwise or counter-clockwise until the desired damping is achieved. The adjustment is multi-turn and correct damping may require several trial and error adjustments. A built-in antilock guard allows adjustments to be made at any damping rate without unit lock up.
- Positive stop:** External positive stops 0.04 in to 0.06 in before the end of stroke provided by the customer.
- Material:** Outer body: Black anodized aluminium; Piston rod: Hard chrome plated steel; End fittings: Zinc plated steel
- Mounting:** In any position
- Note:** Increased break-away force if unit has not moved for some time.
- End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.
- Safety information:** Mechanical Stop required 0.04 in to 0.06 in before end of stroke.

Issue 04.2018 – Specifications subject to change



Adjustable, Compression and extension force 16 lbs to 674 lbs

**End Fitting**
**Standard Dimensions**
**End Fitting**

**End Fitting A8**  
max. force 674 lbs

**End Fitting B8**  
Stud Thread B8

**End Fitting C8**  
Angle Ball Joint C8  
max. force 270 lbs  
Also available with UNF thread 5/16-18. Order G5/16.

**End Fitting D8**  
Clevis Fork D8  
max. force 674 lbs

**End Fitting E8**  
Swivel Eye E8  
max. force 674 lbs

**Performance and Dimensions**

TYPES	Stroke inch	L extended inch	<sup>1</sup> Compression force max. lbs
HBD-28-50	1.97	9.85	674.43
HBD-28-100	3.94	15.75	674.43
HBD-28-150	5.91	21.66	674.43
HBD-28-200	7.87	27.56	674.43
HBD-28-250	9.84	33.47	674.43
HBD-28-300	11.81	39.37	562.03
HBD-28-350	13.78	45.28	449.62
HBD-28-400	15.75	51.19	337.22
HBD-28-500	19.69	63.00	224.81

<sup>1</sup> Max. extension force for all stroke lengths 674 lbs.

**Ordering Example**

**HBD-28-150-AA-P**

Type (Hydraulic Damper) \_\_\_\_\_  
 Body 1.10" (28 mm) \_\_\_\_\_  
 Stroke 5.91" (150 mm) \_\_\_\_\_  
 Piston Rod End Fitting A8 \_\_\_\_\_  
 Body End Fitting A8 \_\_\_\_\_  
 Damping Direction (P = in both directions) \_\_\_\_\_

**Model Type Prefix**

P = Damping in both directions  
 N = Damping on in stroke only  
 M = Damping on out stroke only  
 X = Special model suffix

**Mounting accessories see from page 212.**

### Technical Data

**Compression and extension force:** 16 lbs to 674 lbs

**Free travel:** These units have no free travel and are ideal for applications that require this level of performance.

**Operating temperature range:** -4 °F to 176 °F

**Adjustment:** Pull the piston rod out to its fully extended position. While pulling on the rod, turn it clockwise or counter-clockwise until the desired damping is achieved. The adjustment is multi-turn and correct damping may require several trial and error adjustments. A built-in antilock guard allows adjustments to be made at any damping rate without unit lock up.


**Positive stop:** External positive stops 0.04 in to 0.06 in before the end of stroke provided by the customer.

**Material:** Outer body: Black anodized aluminium; Piston rod: Hard chrome plated steel; End fittings: Zinc plated steel

**Mounting:** In any position

**Note:** Increased break-away force if unit has not moved for some time.

**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

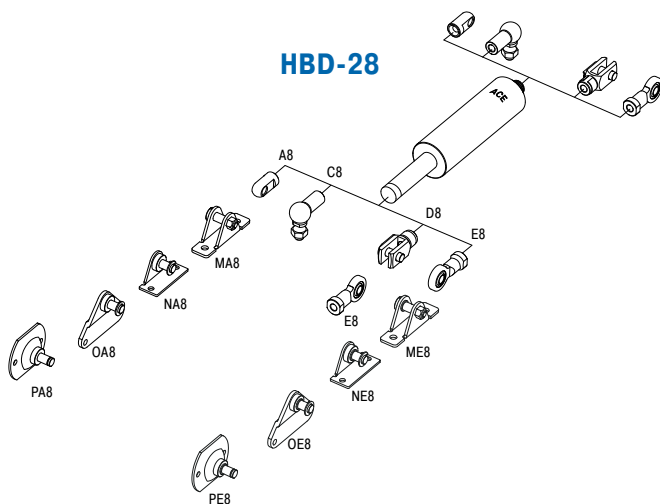**Safety information:** Mechanical Stop required 0.04 in to 0.06 in before end of stroke.


Adjustable, Compression and extension force 18 lbs to 2,248 lbs

End Fitting

Standard Dimensions

End Fitting

**Performance and Dimensions**

TYPES	Stroke inch	L extended inch	<sup>1</sup> Compression force max. lbs
HBD-40-100	3.94	16.93	2,248.10
HBD-40-150	5.91	22.83	2,248.10
HBD-40-200	7.87	28.74	2,248.10
HBD-40-300	11.81	40.55	2,248.10
HBD-40-400	15.75	52.36	1,798.48
HBD-40-500	19.69	64.17	1,348.86
HBD-40-600	23.62	75.98	899.24
HBD-40-700	27.56	87.80	674.43
HBD-40-800	31.50	99.61	449.62

<sup>1</sup> Max. extension force for all stroke lengths 2,248 lbs.

**Ordering Example**

HBD-40-300-AA-P

Type (Hydraulic Damper) \_\_\_\_\_  
 Body 1.57" (40 mm) \_\_\_\_\_  
 Stroke 11.81" (300 mm) \_\_\_\_\_  
 Piston Rod End Fitting A14 \_\_\_\_\_  
 Body End Fitting A14 \_\_\_\_\_  
 Damping Direction (P = in both directions) \_\_\_\_\_

**Model Type Prefix**

P = Damping in both directions  
 N = Damping on in stroke only  
 M = Damping on out stroke only  
 X = Special model suffix

**Mounting accessories see from page 212.**

Technical Data

**Compression and extension force:** 18 lbs to 2,248 lbs

**Free travel:** These units have no free travel and are ideal for applications that require this level of performance.

**Operating temperature range:** -4 °F to 176 °F

**Adjustment:** Pull the piston rod out to its fully extended position. While pulling on the rod, turn it clockwise or counter-clockwise until the desired damping is achieved. The adjustment is multi-turn and correct damping may require several trial and error adjustments. A built-in antilock guard allows adjustments to be made at any damping rate without unit lock up.

**Positive stop:** External positive stops 0.04 in to 0.06 in before the end of stroke provided by the customer.


**Material:** Outer body: Black anodized aluminium; Piston rod: Hard chrome plated steel; End fittings: Zinc plated steel

**Mounting:** In any position

**Note:** Increased break-away force if unit has not moved for some time.

**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

**Safety information:** Mechanical Stop required 0.04 in to 0.06 in before end of stroke.

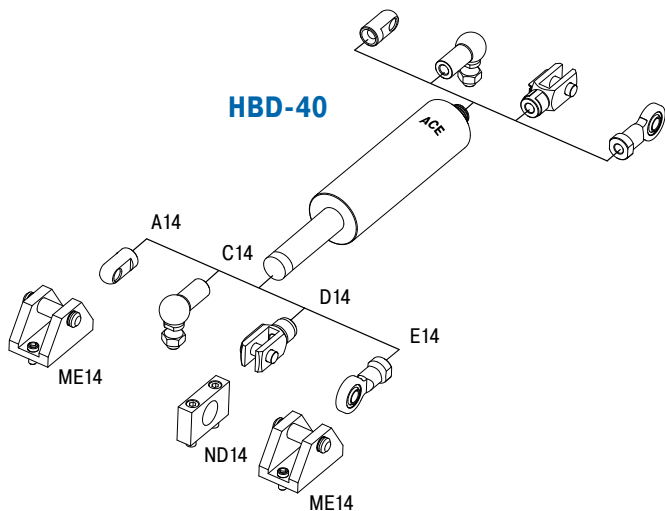

# Dream it

We. Love. Challenges.



Ok, pure gold or fur-covered are not realistic options.  
But if you need a perfect solution for your individual needs, ACE has the tools and expertise to make it happen.

**Call our experts**  
**+1 800-521-3220** or go to **[www.acecontrols.com](http://www.acecontrols.com)**

## HB-12 to HB-70

### Linear motion control

#### Adjustable


**Compression and extension force 4 lbs to 11,240 lbs**

**Stroke 0.98 in to 31.50 in**

High quality and long service life: The hydraulic dampers of the product family HB can also be used as single or double acting brake. Its coated body and piston rods with wear-resistant surface treatment are features of high quality and long service life.

The maintenance free, ready-to-install and closed systems provide a constant feed rate and are adjustable. The control segment on the piston makes adjustment at the end position child's play. Thanks to a broad selection of end fittings the assembly is easy to mount, so that the damper can be universally deployed for damping swinging masses, such as in power or free conveyors.

On automotive, automation and machine building, medical technology or the electronics and furniture industry, these machine elements are found in a number of different areas.

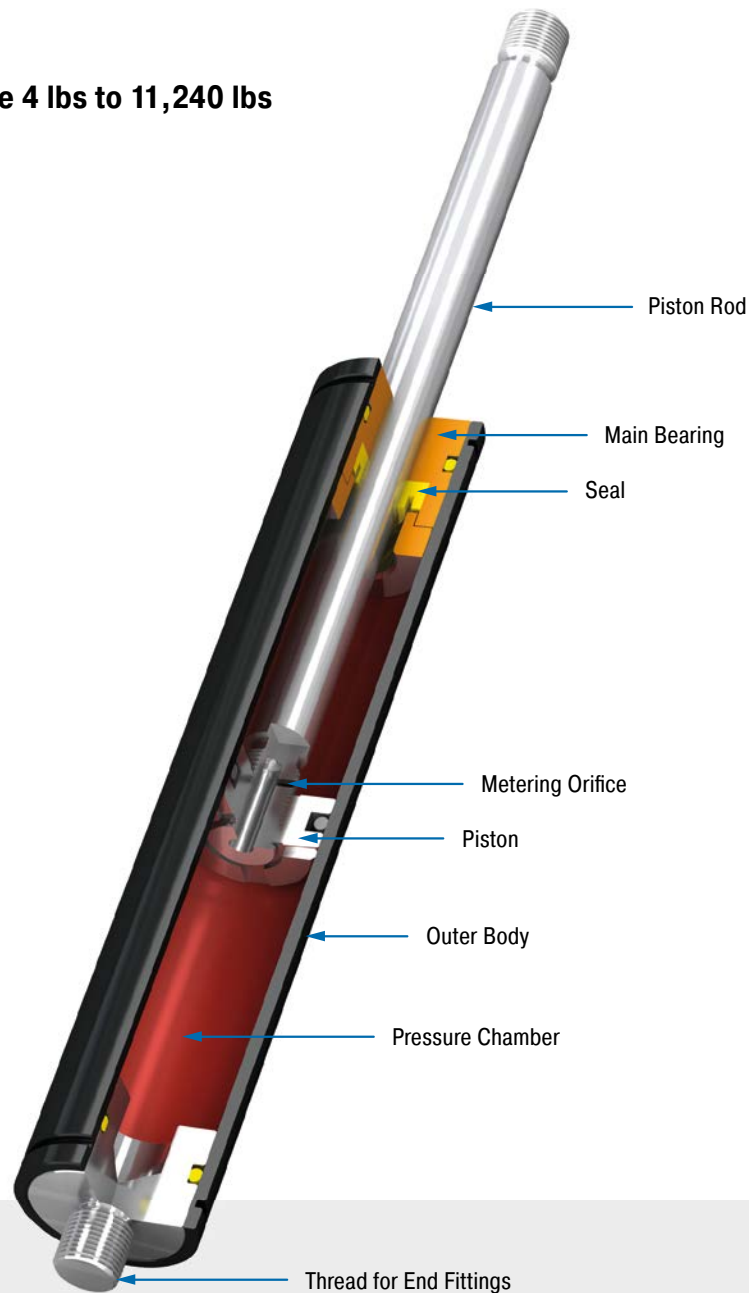

#### Technical Data

**Compression and extension force:** 4 lbs to 11,240 lbs

**Outer body diameter:** Ø 0.47 in to Ø 2.76 in

**Piston rod diameter:** Ø 0.16 in to Ø 1.18 in

**Lifetime:** Approx. 250,000 cycles

**Free travel:** Construction of the damper results in a free travel of approx. 20 % of stroke.

**Separator piston:** Available as a special option without free travel achieved by separator piston and nitrogen accumulator.

**Operating temperature range:** -4 °F to 176 °F

**Adjustment:** Achieved by turning the piston rod in its fully extended or fully compressed position.

**Positive stop:** External positive stops 0.04 in to 0.24 in before the end of stroke provided by the customer.

**Damping medium:** Hydraulic oil

**Material:** Outer body: Coated steel; Piston rod: Steel or stainless steel with wear-resistant coating; End fittings: Zinc plated steel

**Mounting:** In any position

**Application field:** Conveyor systems, Transport systems, Furniture industry, Locking systems, Sports equipment

**Note:** Increased break-away force if unit has not moved for some time.

**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

**On request:** Special oils and other special options. Alternative accessories available on request.


Adjustable, Compression and extension force 4 lbs to 40 lbs

### End Fitting

### Standard Dimensions


### End Fitting

**A3.5**

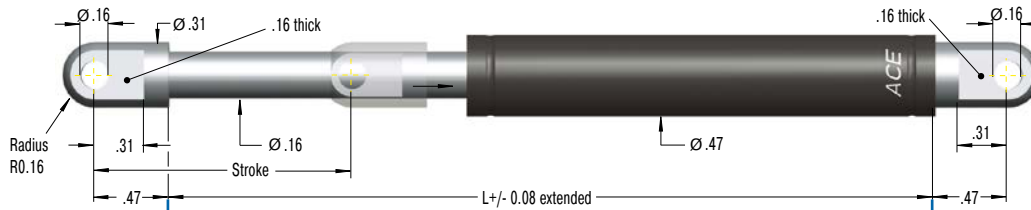

**Eye A3.5**  
max. force 83 lbs

**B3.5**




### Performance and Dimensions

TYPES	Stroke inch	L extended inch	<sup>1</sup> Compression force max. lbs
HB-12-10	0.39	2.17	40.47
HB-12-20	0.79	2.95	40.47
HB-12-30	1.18	3.74	40.47
HB-12-40	1.57	4.53	40.47
HB-12-50	1.97	5.31	40.47
HB-12-60	2.36	6.10	40.47
HB-12-70	2.76	6.89	40.47
HB-12-80	3.15	7.68	33.72

<sup>1</sup> Max. extension force for all stroke lengths 40 lbs.


**Stud Thread B3.5**

**C3.5**




**Angle Ball Joint C3.5**  
max. force 83 lbs

**D3.5**




**Clevis Fork D3.5**  
max. force 83 lbs

**E3.5**



**Swivel Eye E3.5**  
max. force 83 lbs

**G3.5**



**Ball Socket G3.5**  
max. force 83 lbs

### Ordering Example

**HB-12-30-AC-M**


Type (Hydraulic Damper) \_\_\_\_\_  
 Body 0.47" (12 mm) \_\_\_\_\_  
 Stroke 1.18" (30 mm) \_\_\_\_\_  
 Piston Rod End Fitting A3.5 \_\_\_\_\_  
 Body End Fitting C3.5 \_\_\_\_\_  
 Damping Direction (M = out stroke only) \_\_\_\_\_

### Model Type Prefix

- P: Damping in both directions
- N: Damping on in stroke only
- M: Damping on out stroke only
- X: Special model suffix

Mounting accessories see from page 212.

**Rod Shroud W3.5-12**



### Technical Data

**Compression and extension force:** 4 lbs to 40 lbs

**Free travel:** Construction of the damper results in a free travel of approx. 21 % of stroke.

**Separator piston:** Available as a special option without free travel achieved by separator piston and nitrogen accumulator.

**Operating temperature range:** -4 °F to 176 °F

**Adjustment:** Achieved by turning the piston rod in its fully extended or fully compressed position.

Clockwise rotation = increase of the damping

Anti-clockwise rotation = decrease of the damping

Damping force adjustable before installation. Adjustment can add a max. of 0.24 in to the L dimension.


**Positive stop:** External positive stops 0.04" to 0.06" before the end of stroke provided by the customer.

**Material:** Outer body: Coated steel; Piston rod: Stainless steel (1.4301/1.4305, AISI 304/303); End fittings: Zinc plated steel

**Mounting:** In any position

**Note:** Increased break-away force if unit has not moved for some time.

**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

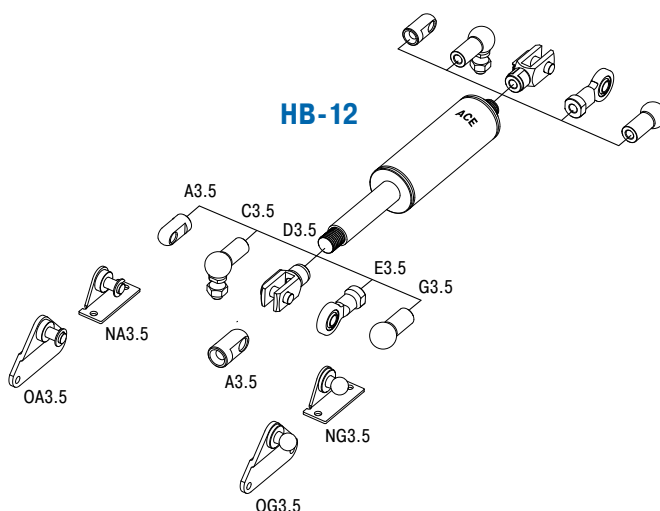

Adjustable, Compression and extension force 4 lbs to 180 lbs

End Fitting

Standard Dimensions

End Fitting

**Performance and Dimensions**

TYPES	Stroke inch	L extended inch	<sup>1</sup> Compression force max. lbs
HB-15-25	0.98	3.54	179.85
HB-15-50	1.97	5.51	179.85
HB-15-75	2.95	7.48	179.85
HB-15-100	3.94	9.5	78.68
HB-15-150	5.91	13.39	67.44

<sup>1</sup> Max. extension force for all stroke lengths 180 lbs.

**Ordering Example**

HB-15-150-AA-P

Type (Hydraulic Damper) \_\_\_\_\_  
 Body 0.59" (15 mm) \_\_\_\_\_  
 Stroke 5.91" (150 mm) \_\_\_\_\_  
 Piston Rod End Fitting A5 \_\_\_\_\_  
 Body End Fitting A5 \_\_\_\_\_  
 Damping Direction (P = in both directions) \_\_\_\_\_

**Model Type Prefix**

P: Damping in both directions  
 N: Damping on in stroke only  
 M: Damping on out stroke only  
 X: Special model suffix

**Mounting accessories see from page 212.**

Technical Data

**Compression and extension force:** 4 lbs to 180 lbs

**Free travel:** Construction of the damper results in a free travel of approx. 20 % of stroke.

**Separator piston:** Available as a special option without free travel achieved by separator piston and nitrogen accumulator.

**Operating temperature range:** -4 °F to 176 °F

**Adjustment:** Achieved by turning the piston rod in its fully extended or fully compressed position.

Clockwise rotation = increase of the damping

Anti-clockwise rotation = decrease of the damping

Damping force adjustable before installation. Adjustment can add a max. of 0.24 in to the L dimension.


**Positive stop:** External positive stops 0.04" to 0.06" before the end of stroke provided by the customer.

**Material:** Outer body: Black anodized aluminium; Piston rod: Steel with wear-resistant coating; End fittings: Zinc plated steel

**Mounting:** In any position

**Note:** Increased break-away force if unit has not moved for some time.

**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

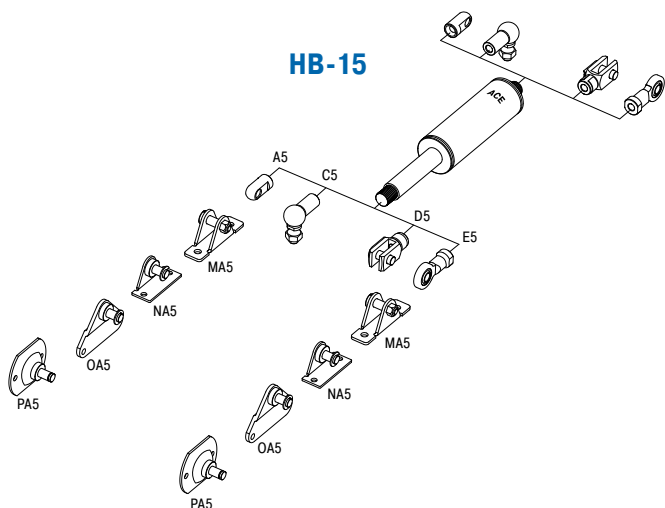

Adjustable, Compression and extension force 7 lbs to 405 lbs

### End Fitting

### Standard Dimensions

### End Fitting

**End Fitting A8**  
max. force 674 lbs

**End Fitting Eye A8**  
max. force 674 lbs

**End Fitting Stud Thread B8**

**End Fitting Angle Ball Joint C8**  
max. force 270 lbs  
Also available with UNF thread 5/16-18. Order G5/16.

**End Fitting Clevis Fork D8**  
max. force 674 lbs

**End Fitting Swivel Eye E8**  
max. force 674 lbs

**Performance and Dimensions**

TYPES	Stroke inch	L extended inch	<sup>1</sup> Compression force max. lbs
HB-22-50	1.97	5.90	404.66
HB-22-100	3.94	9.84	404.66
HB-22-150	5.91	13.78	404.66
HB-22-200	7.87	17.72	224.81
HB-22-250	9.84	21.65	224.81
HB-22-300	11.81	25.58	179.85
HB-22-350	13.78	29.52	134.89
HB-22-400	15.75	33.46	89.92

<sup>1</sup> Max. extension force for all stroke lengths 405 lbs.

**Ordering Example**

**HB-22-150-AA-P**

Type (Hydraulic Damper) \_\_\_\_\_  
 Body 0.87" (22 mm) \_\_\_\_\_  
 Stroke 5.90" (150 mm) \_\_\_\_\_  
 Piston Rod End Fitting A8 \_\_\_\_\_  
 Body End Fitting A8 \_\_\_\_\_  
 Damping Direction (P = in both directions) \_\_\_\_\_

**Model Type Prefix**

P: Damping in both directions  
 N: Damping on in stroke only  
 M: Damping on out stroke only  
 X: Special model suffix

**Mounting accessories see from page 212.**

### Technical Data

**Compression and extension force:** 7 lbs to 405 lbs

**Free travel:** Construction of the damper results in a free travel of approx. 20 % of stroke.

**Separator piston:** Available as a special option without free travel achieved by separator piston and nitrogen accumulator.

**Operating temperature range:** -4 °F to 176 °F

**Adjustment:** Achieved by turning the piston rod in its fully extended or fully compressed position.

Clockwise rotation = increase of the damping

Anti-clockwise rotation = decrease of the damping

Damping force adjustable before installation. Adjustment can add a max. of 0.24 in to the L dimension.


**Positive stop:** External positive stops 0.04" to 0.06" before the end of stroke provided by the customer.

**Material:** Outer body: Black anodized aluminium; Piston rod: Steel with wear-resistant coating; End fittings: Zinc plated steel

**Mounting:** In any position

**Note:** Increased break-away force if unit has not moved for some time.

**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

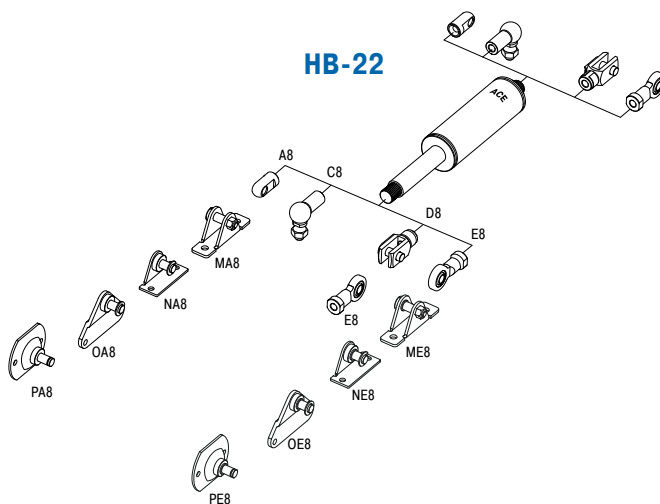

Adjustable, Compression and extension force 7 lbs to 674 lbs

End Fitting

Standard Dimensions

End Fitting

**Performance and Dimensions**

TYPES	Stroke inch	L extended inch	<sup>1</sup> Compression force max. lbs
HB-28-50	1.97	6.30	674.43
HB-28-100	3.94	10.24	674.43
HB-28-150	5.91	14.17	674.43
HB-28-200	7.87	18.11	674.43
HB-28-250	9.84	22.05	674.43
HB-28-300	11.81	25.98	562.03
HB-28-350	13.78	29.92	449.62
HB-28-400	15.75	33.86	337.22
HB-28-500	19.69	41.73	224.81

<sup>1</sup> Max. extension force for all stroke lengths 674 lbs.

**Ordering Example**

HB-28-150-AA-P

Type (Hydraulic Damper) \_\_\_\_\_  
 Body 1.10" (28 mm) \_\_\_\_\_  
 Stroke 5.91" (150 mm) \_\_\_\_\_  
 Piston Rod End Fitting A8 \_\_\_\_\_  
 Body End Fitting A8 \_\_\_\_\_  
 Damping Direction (P = in both directions) \_\_\_\_\_

**Model Type Prefix**

P: Damping in both directions  
 N: Damping on in stroke only  
 M: Damping on out stroke only  
 X: Special model suffix

**Mounting accessories see from page 212.**

Technical Data

**Compression and extension force:** 7 lbs to 674 lbs

**Free travel:** Construction of the damper results in a free travel of approx. 20 % of stroke.

**Separator piston:** Available as a special option without free travel achieved by separator piston and nitrogen accumulator.

**Operating temperature range:** -4 °F to 176 °F

**Adjustment:** Achieved by turning the piston rod in its fully extended or fully compressed position.

Clockwise rotation = increase of the damping

Anti-clockwise rotation = decrease of the damping

Damping force adjustable before installation. Adjustment can add a max. of 0.24 in to the L dimension.


**Positive stop:** External positive stops 0.04" to 0.06" before the end of stroke provided by the customer.

**Material:** Outer body: Black anodized aluminium; Piston rod: Steel with wear-resistant coating; End fittings: Zinc plated steel

**Mounting:** In any position

**Note:** Increased break-away force if unit has not moved for some time.

**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

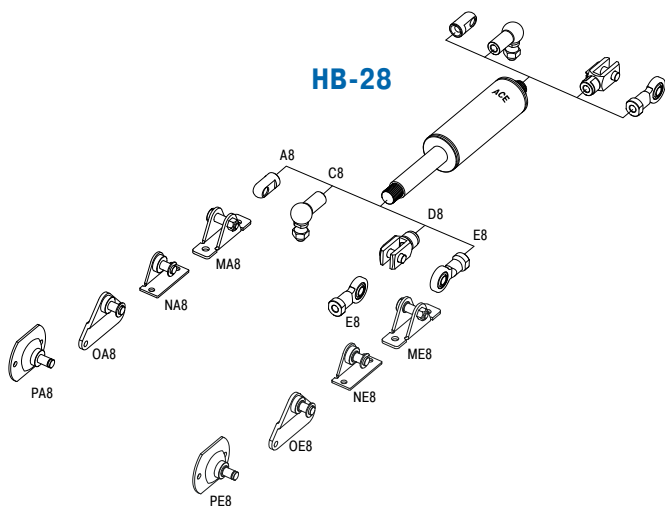



Adjustable, Compression and extension force 7 lbs to 2,248 lbs

### End Fitting

### Standard Dimensions

### End Fitting

**Performance and Dimensions**

TYPES	Stroke inch	L extended inch	<sup>1</sup> Compression force max. lbs
HB-40-100	3.94	10.83	2,248.10
HB-40-150	5.91	14.76	2,248.10
HB-40-200	7.87	18.70	2,248.00
HB-40-300	11.81	26.57	2,248.00
HB-40-400	15.75	34.45	1,798.48
HB-40-500	19.69	42.32	1,348.86
HB-40-600	23.62	50.20	899.24
HB-40-700	27.56	58.07	674.43
HB-40-800	31.50	65.94	674.43

<sup>1</sup> Max. extension force for all stroke lengths 2,248 lbs.

**Ordering Example**

**HB-40-300-AA-P**

Type (Hydraulic Damper) \_\_\_\_\_ ↑ ↑ ↑ ↑ ↑

Body 1.57" (40 mm) \_\_\_\_\_ ↑ ↑ ↑ ↑ ↑

Stroke 11.81" (300 mm) \_\_\_\_\_ ↑ ↑ ↑ ↑ ↑

Piston Rod End Fitting A14 \_\_\_\_\_ ↑

Body End Fitting A14 \_\_\_\_\_ ↑

Damping Direction (P = in both directions) \_\_\_\_\_ ↑

**Model Type Prefix**

P: Damping in both directions  
 N: Damping on in stroke only  
 M: Damping on out stroke only  
 X: Special model suffix

**Mounting accessories see from page 212.**

### Technical Data

**Compression and extension force:** 7 lbs to 2,248 lbs

**Free travel:** Construction of the damper results in a free travel of approx. 20 % of stroke.

**Separator piston:** Available as a special option without free travel achieved by separator piston and nitrogen accumulator.

**Operating temperature range:** -4 °F to 176 °F

**Adjustment:** Achieved by turning the piston rod in its fully extended or fully compressed position.

Clockwise rotation = increase of the damping  
 Anti-clockwise rotation = decrease of the damping

Damping force adjustable before installation. Adjustment can add a max. of 0.24 in to the L dimension.


**Positive stop:** External positive stops 0.04" to 0.06" before the end of stroke provided by the customer.

**Material:** Outer body: Black anodized aluminium; Piston rod: Steel with wear-resistant coating; End fittings: Zinc plated steel

**Mounting:** In any position

**Note:** Increased break-away force if unit has not moved for some time.

**End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

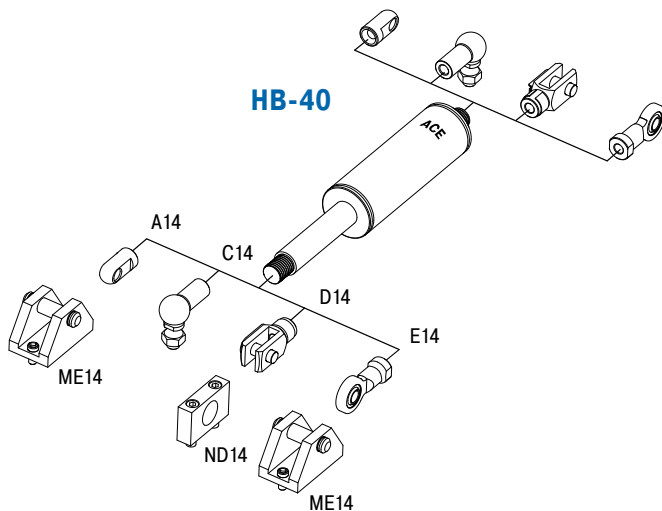

Adjustable, Compression and extension force 450 lbs to 11,241 lbs

End Fitting

Standard Dimensions

End Fitting

**B24** Stud Thread **B24**

**D24** Clevis Fork **D24**  
max. force 11,240 lbs

**E24** Swivel Eye **E24**  
max. force 11,240 lbs

**Performance and Dimensions**

TYPES	Stroke inch	L extended inch	<sup>1</sup> Compression force max. lbs
HB-70-100	4.37	13.03	11,240
HB-70-200	8.31	20.91	11,240
HB-70-300	12.24	28.78	11,240
HB-70-400	16.18	36.65	6,812
HB-70-500	20.12	44.53	4,856
HB-70-600	24.06	52.40	3,642
HB-70-700	27.99	60.28	2,833
HB-70-800	31.93	68.15	2,271

<sup>1</sup> Max. extension force for all stroke lengths 11,241 lbs.

**Ordering Example**

**HB-70-300-EE-N**

Type (Hydraulic Damper) \_\_\_\_\_  
 Body 2.76" (70 mm) \_\_\_\_\_  
 Stroke 11.81" (300 mm) \_\_\_\_\_  
 Piston Rod End Fitting E24 \_\_\_\_\_  
 Body End Fitting E24 \_\_\_\_\_  
 Damping Direction (N = in stroke only) \_\_\_\_\_


**Model Type Prefix**

P: Damping in both directions  
 N: Damping on in stroke only  
 M: Damping on out stroke only  
 X: Special model suffix

**Mounting accessories see from page 212.**

**Rod Shroud W24-70**

Ø 3.15  
 L = Stroke + 5.12

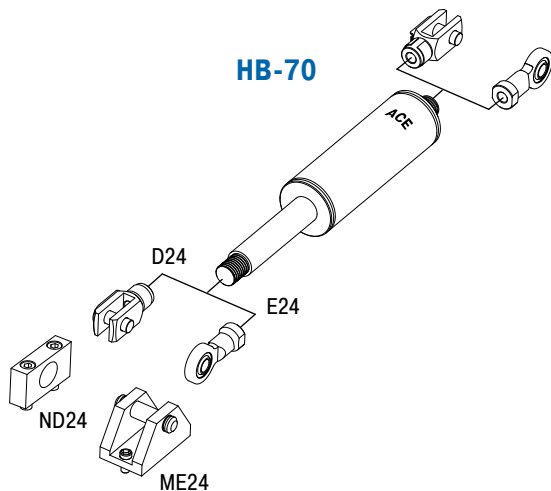

Technical Data

- Compression and extension force:** 450 lbs to 11,241 lbs
- Free travel:** Construction of the damper results in a free travel of approx. 20 % of stroke.
- Separator piston:** Available as a special option without free travel achieved by separator piston and nitrogen accumulator.
- Operating temperature range:** -4 °F to 176 °F
- Adjustment:** Achieved by turning the piston rod in its fully extended or fully compressed position.
- Positive stop:** External positive stops 0.20" to 0.24" before the end of stroke provided by the customer.
- Material:** Outer body: Coated steel; Piston rod: Hard chrome plated steel; End fittings: Zinc plated steel
- Mounting:** In any position
- Note:** Increased break-away force if unit has not moved for some time.
- End fittings:** They are interchangeable and if necessary must be positively secured by the customer to prevent unscrewing.

# ACE Digital Tools



For more information about the calculation service see page 188!

**Print catalog? Everyone can.**

**ACE offers more:**

- ▶ Downloads: Product information in many languages
- ▶ PC calculation software & online calculation service
- ▶ Extensive CAD component libraries
- ▶ ACE-YouTube channel with video tips
- ▶ VibroChecker – free award-winning iPhone App



**All available at [www.acecontrols.com](http://www.acecontrols.com)**

## Application Examples

### DVC-32

#### Precise unreeling

Hydraulic dampers bring the sled movement of this textile machine to a gentle stop. At the turning point of 287 lbs reeling spools, a sled should move up and down smoothly without causing a collision at the end of stroke position. The solution was provided by the hydraulic damper DVC-32-100. A self-contained sealed unit, ready to install and maintenance-free these units are ideal for precise control of speeds in both directions of travel. The travel speed is maintained throughout the entire stroke and can be independently adjusted in each direction of travel. Thanks to their compact design and wide choice of mounting accessories, these dampers could be easily integrated into this machine.

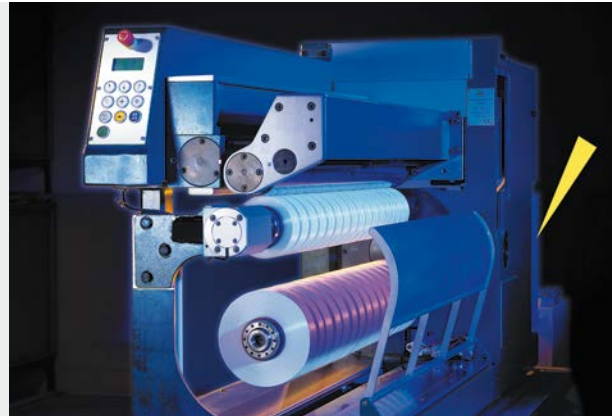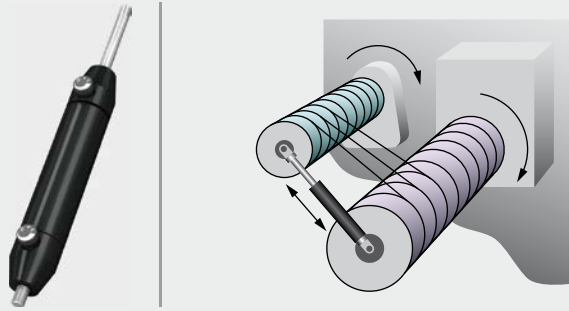


Textile machine unreels threads even better

### HB-15

#### Operating speed of flaps top-regulated

In the past, operators of used-clothes containers could sustain injury because the flaps closed relatively quickly and uncontrollably. Various hydraulic dampers of the type HB-15, which are designed specifically for the type of container, regulate the synchronization of the flap in both directions and thereby serve to regulate the operating speed. To accommodate a range of requirements and to provide optimal protection against theft, different types with different strokes are mounted on flaps without damping, on large flaps with damping and on rotor flaps with damping.

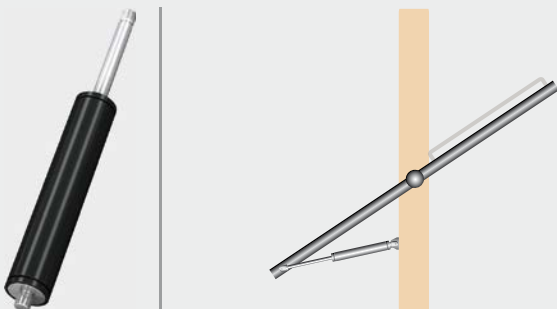

Hydraulic dampers prevent fingers becoming trapped in used-clothes containers as they ensure more gentle opening and closing movements  
MCB Milieu & Techniek BV, 4704 SE Roosendaal, Netherlands


**HB-40**

**Swinging movements cushioned by hydraulic dampers**

Passengers always feel the swinging movement involved when cable cars arrive at the ski station. Maintenance-free hydraulic dampers type HB-40-300 cushion these movements perfectly. Designers of the cable cars, connected by means of an articulated joint via a four-point frame and connection guide to the suspension rod, profit from the ability of the adjustable dampers to absorb compressive forces of up to 2,248 lbs on either side.



Hydraulic dampers for added convenience when operating cable cars

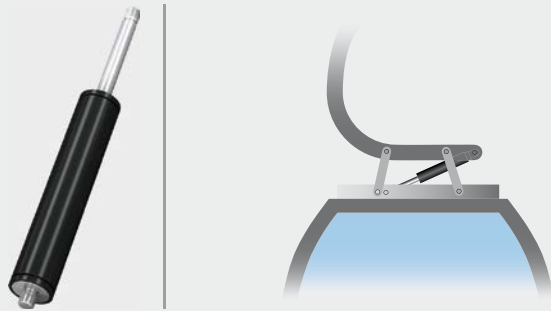

## Mounting Accessories for steel gas springs and hydraulic dampers


**By taking advantage of the very extensive range of ACE end fittings and mounting brackets you can easily and simply install our gas springs and hydraulic dampers. You profit from the variety of DIN standard end fittings such as swivel eyes, clevis forks, angle ball joints, inline ball joints, and included ball sockets.**

ACE also offers eye fittings made of wear-resistant steel to meet the higher specification requirements found in industrial applications. With over 30 different types available these mounting accessories provide an extensive range of combinations for optimum installations.

With the ACE selection program you can choose not only your ACE gas springs but also the ideal end fittings and mounting brackets for your individual application example.

**The complete range of accessories are also available as individual components.**


**Infinite  
Combinations!**

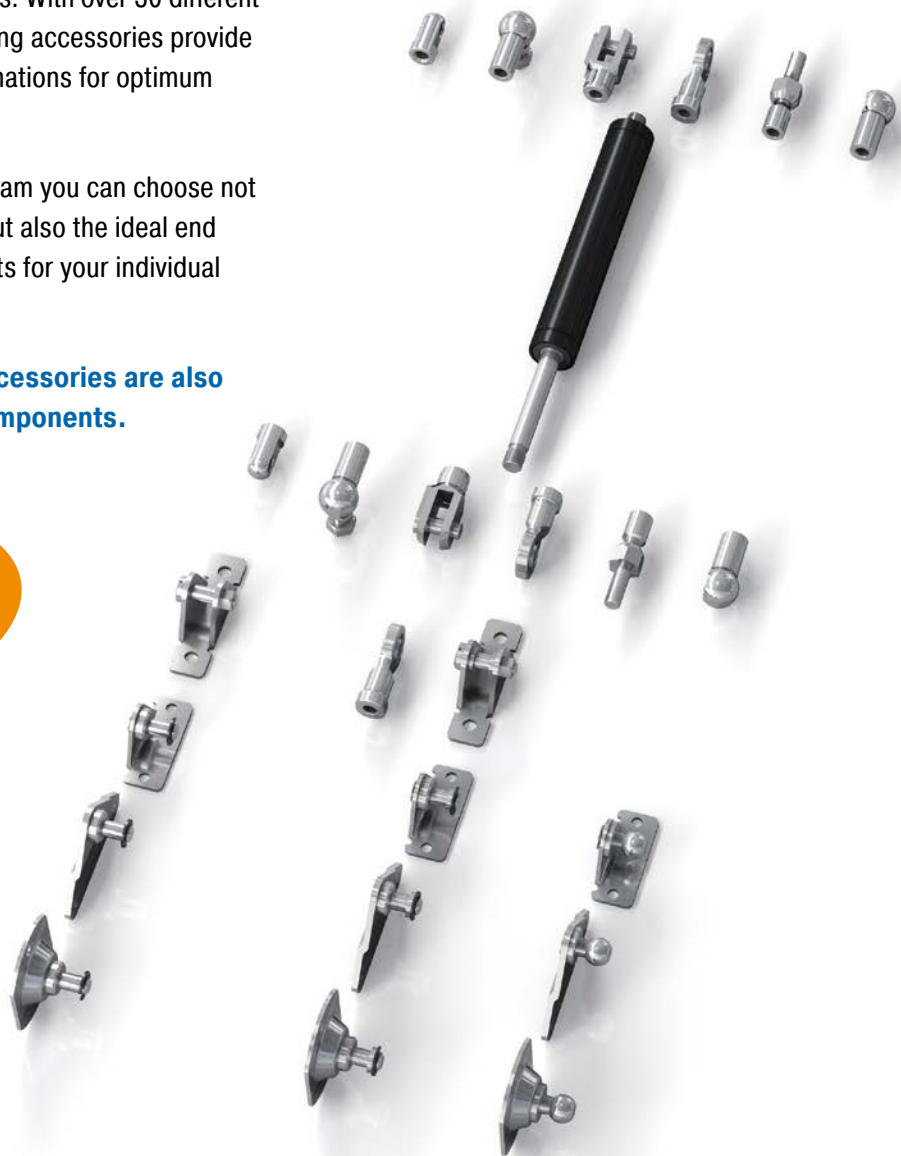

### M3.5x0.6 (for GS-8, GS-10, GS-12, GZ-15, HB-12)

#### C3.5


Angle Ball Joint  
DIN 71802



<sup>1</sup> max. force 83 lbs

#### E3.5


Swivel Eye  
DIN 648



<sup>1</sup> max. force 83 lbs

#### A3.5


Eye



<sup>1</sup> max. force 83 lbs

#### NA3.5



Angle Bracket




<sup>1</sup> max. force 40 lbs

#### OA3.5

Side Bracket




<sup>1</sup> max. force 40 lbs



#### D3.5


Clevis Fork  
DIN 71752



<sup>1</sup> max. force 83 lbs

#### A3.5


Eye



<sup>1</sup> max. force 83 lbs

#### G3.5


Ball Socket  
DIN 71805




<sup>1</sup> max. force 83 lbs

#### NG3.5

Angle Bracket




<sup>1</sup> max. force 40 lbs




#### OG3.5

Side Bracket



<sup>1</sup> max. force 40 lbs



<sup>1</sup> Attention! Max. static load in Newtons. Beware force increase during compression (progression) and observe max. force limit.

**M5x0.8 (for GS-15, HBD-15, HB-15)**

**C5**  
Angle Ball Joint  
DIN 71802

<sup>1</sup> max. force 112 lbs

**D5**  
Clevis Fork  
DIN 71752

<sup>1</sup> max. force 180 lbs

**F5**  
Inline Ball Joint

<sup>1</sup> max. force 112 lbs  
Attention! Must only be used with compression loads.

**A5**  
Eye

<sup>1</sup> max. force 180 lbs

**MA5**  
Bearing Shoe

<sup>1</sup> max. force 112 lbs

**NA5**  
Angle Bracket

<sup>1</sup> max. force 90 lbs



**E5**  
Swivel Eye  
DIN 648

<sup>1</sup> max. force 180 lbs

**GSB-01**  
Side Bracket

<sup>1</sup> max. force 112 lbs

**PA5**  
Round Bracket

<sup>1</sup> max. force 112 lbs

**G5**  
Ball Socket  
DIN 71805

<sup>1</sup> max. force 112 lbs

**NG5**  
Angle Bracket

<sup>1</sup> max. force 90 lbs

**GSB-02**  
Side Bracket

<sup>1</sup> max. force 112 lbs



**PG5**  
Round Bracket

<sup>1</sup> max. force 112 lbs

<sup>1</sup> Attention! Max. static load in Newtons. Beware force increase during compression (progression) and observe max. force limit.




### M8x1.25

(for GS-19, GS-22, GZ-19, HBD-22, HBD-28, HB-22, HB-28, DVC-32)

#### C8


Angle Ball Joint  
DIN 71802



<sup>1</sup> max. force 270 lbs  
Also available with UNF thread 5/16-18.  
Order G5/16.

#### F8


Inline Ball Joint



<sup>1</sup> max. force 270 lbs  
Attention! Must only be used  
with compression loads.

#### A8


Eye




<sup>1</sup> max. force 674 lbs

#### MA8

Bearing Shoe




<sup>1</sup> max. force 405 lbs




#### NA8

Angle Bracket




<sup>1</sup> max. force 225 lbs




#### OA8

Side Bracket




<sup>1</sup> max. force 270 lbs




#### PA8

Round Bracket




<sup>1</sup> max. force 270 lbs



#### D8

Clevis Fork  
DIN 71752




<sup>1</sup> max. force 674 lbs



#### E8

Swivel Eye  
DIN 648




<sup>1</sup> max. force 674 lbs

<sup>1</sup> Attention! Max. static load in Newtons. Beware force increase during compression (progression) and observe max. force limit.

**M8x1.25 (for GS-19, GS-22, GZ-19, HBD-22, HBD-28, HB-22, HB-28, DVC-32)**


**E8**  
Swivel Eye  
DIN 648




<sup>1</sup> max. force 674 lbs




**ME8**  
Bearing Shoe




<sup>1</sup> max. force 405 lbs




**NE8**  
Angle Bracket




<sup>1</sup> max. force 225 lbs




**OE8**  
Side Bracket




<sup>1</sup> max. force 270 lbs




**PE8**  
Round Bracket



<sup>1</sup> max. force 270 lbs




**G8**  
Ball Socket  
DIN 71805




<sup>1</sup> max. force 270 lbs




**NG8**  
Angle Bracket




<sup>1</sup> max. force 225 lbs




**OG8**  
Side Bracket




<sup>1</sup> max. force 270 lbs



**PG8**  
Round Bracket




<sup>1</sup> max. force 270 lbs



<sup>1</sup> Attention! Max. static load in Newtons. Beware force increase during compression (progression) and observe max. force limit.


### M10x1.5 (for GS-28, GZ-28, HBD-50)

**C10**  
Angle Ball Joint  
DIN 71802




<sup>1</sup> max. force 405 lbs

**F10**  
Inline Ball Joint




<sup>1</sup> max. force 405 lbs  
Attention! Must only be used with compression loads.

**A10**  
Eye




<sup>1</sup> max. force 2,248 lbs


**MA10**  
Bearing Shoe



<sup>1</sup> max. force 405 lbs




**D10**  
Clevis Fork  
DIN 71752




<sup>1</sup> max. force 2,248 lbs

**E10**  
Swivel Eye  
DIN 648




<sup>1</sup> max. force 2,248 lbs

**E10**  
Swivel Eye  
DIN 648

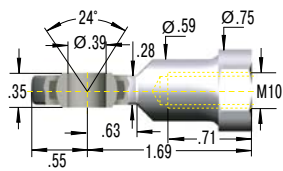


<sup>1</sup> max. force 2,248 lbs


**ME10**  
Bearing Shoe




<sup>1</sup> max. force 405 lbs




**OE10**  
Side Bracket




<sup>1</sup> max. force 270 lbs



**PE10**  
Round Bracket




<sup>1</sup> max. force 270 lbs




**M14x1.5 (for GS-40, GST-40, GZ-40, HBD-40, HB-40)**

**C14**  
Angle Ball Joint  
DIN 71802




<sup>1</sup> max. force 719 lbs

**F14**  
Inline Ball Joint




<sup>1</sup> max. force 719 lbs  
Attention! Must only be used with compression loads.

**A14**  
Eye




<sup>1</sup> max. force 2,248 lbs


**ME14**  
Bearing Shoe



<sup>1</sup> max. force 2,248 lbs




**D14**  
Clevis Fork  
DIN 71752




<sup>1</sup> max. force 2,248 lbs


**ND14**  
Mounting Flange



<sup>1</sup> max. force 2,248 lbs




**E14**  
Swivel Eye  
DIN 648




<sup>1</sup> max. force 2,248 lbs

**ME14**  
Bearing Shoe




<sup>1</sup> max. force 2,248 lbs




<sup>1</sup> Attention! Max. static load in Newtons. Beware force increase during compression (progression) and observe max. force limit.

### M24x2 (for GS-70, HB-70)


**D24**  
Clevis Fork  
DIN 71752




**ND24**  
Mounting Flange

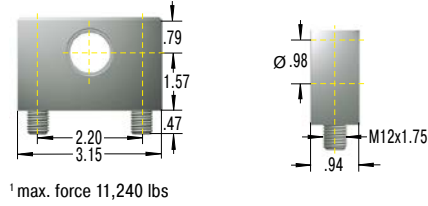

**E24**  
Swivel Eye  
DIN 648



**ME24**  
Bearing Shoe

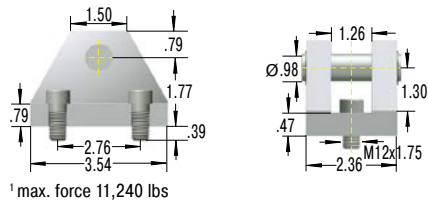

<sup>1</sup>Attention! Max. static load in Newtons. Beware force increase during compression (progression) and observe max. force limit.

## Mounting Accessories for stainless steel gas springs and hydraulic dampers


**For our gas springs and hydraulic dampers made of stainless steel we also offer a flexible product range of DIN standardized end fittings and mounting brackets. These eyes, swivel eyes, clevis forks, angle ball joints, ball sockets, inline ball joints and mounting brackets are also made of sturdy stainless steel and can be easily combined.**

The high-quality stainless steel accessories are rustproof and weakly magnetic. Just as with the corresponding stainless steel gas springs and hydraulic dampers, they are preferred in the food, electronics and ship building industries along with medical and cleanroom technology.

All ACE stainless steel gas springs and the appropriate mounting accessories are individually designed for each application with the ACE calculation program.

**The entire range of stainless steel accessories is also available separately.**


**Infinite  
Combinations!**

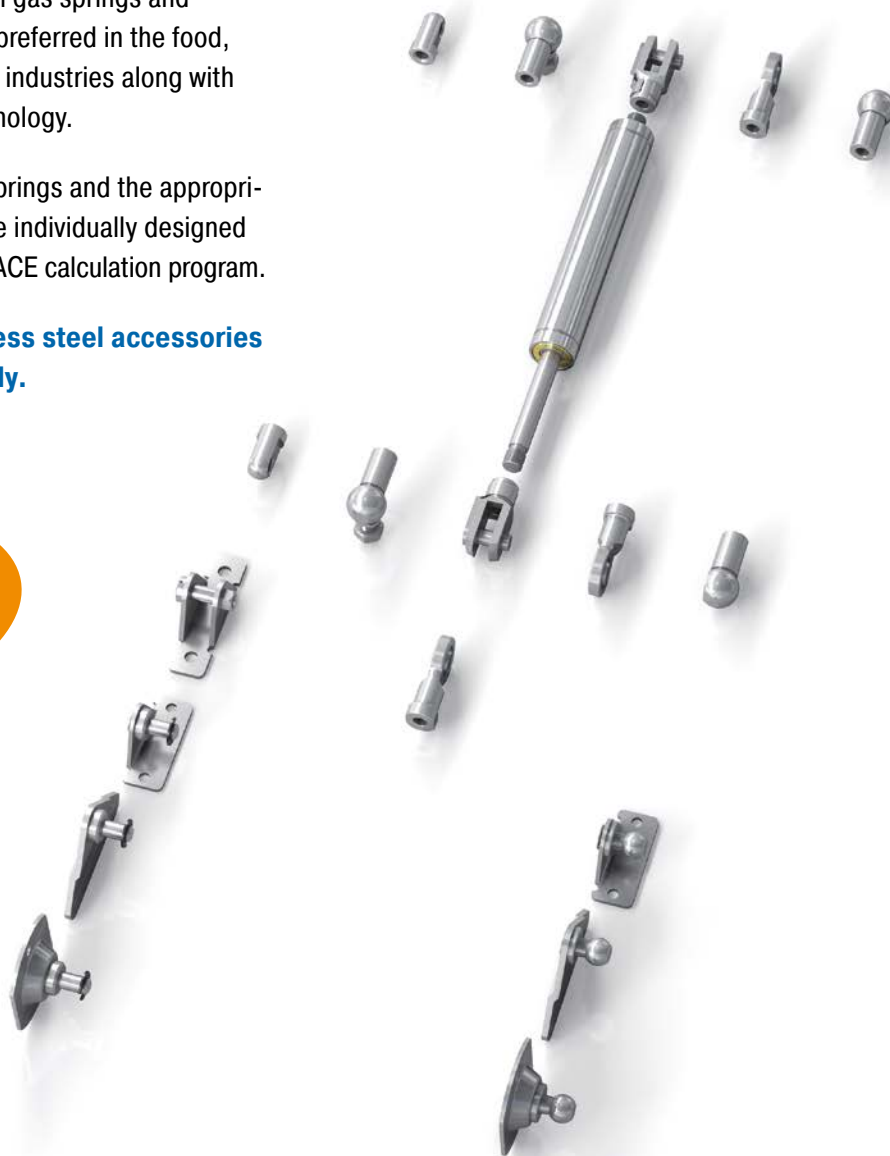

### M3.5x0.6


(for GS-8-V4A, GS-10-V4A, GS-12-V4A, GZ-15-V4A)

#### C3.5-V4A Angle Ball Joint



<sup>1</sup> max. force 83 lbs


#### A3.5-V4A Eye




<sup>1</sup> max. force 83 lbs




#### NA3.5-V4A Angle Bracket




<sup>1</sup> max. force 40 lbs




#### OA3.5-V4A Side Bracket



<sup>1</sup> max. force 40 lbs




#### D3.5-V4A Clevis Fork



<sup>1</sup> max. force 83 lbs




#### A3.5-V4A Eye



<sup>1</sup> max. force 83 lbs


#### G3.5-V4A Ball Socket




<sup>1</sup> max. force 83 lbs




#### NG3.5-V4A Angle Bracket




<sup>1</sup> max. force 40 lbs



#### OG3.5-V4A Side Bracket




<sup>1</sup> max. force 40 lbs



<sup>1</sup> Attention! Max. static load in Newtons. Beware force increase during compression (progression) and observe max. force limit.


**M5x0.8 (for GS-15-VA)**

**C5-VA**  
Angle Ball Joint




1 max. force 97 lbs

**D5-VA**  
Clevis Fork




1 max. force 110 lbs

**E5-VA**  
Swivel Eye




1 max. force 110 lbs

**A5-VA**  
Eye




1 max. force 110 lbs

**MA5-V4A**  
Bearing Shoe




1 max. force 112 lbs


**NA5-V4A**  
Angle Bracket



1 max. force 90 lbs




**OA5-V4A**  
Side Bracket





1 max. force 40 lbs


**PA5-V4A**  
Round Bracket



1 max. force 112 lbs




**G5-VA**  
Ball Socket




1 max. force 97 lbs


**NG5-V4A**  
Angle Bracket




1 max. force 90 lbs




**OG5-V4A**  
Side Bracket




1 max. force 40 lbs



**PG5-V4A**  
Round Bracket



1 max. force 112 lbs




1 Attention! Max. static load in Newtons. Beware force increase during compression (progression) and observe max. force limit.




### M8x1.25 (for GS-19-VA, GS-22-VA, GZ-19-VA)


**C8-VA**  
Angle Ball Joint





**D8-VA**  
Clevis Fork





**A8-VA**  
Eye





**MA8-V4A**  
Bearing Shoe





**NA8-V4A**  
Angle Bracket




**OA8-V4A**  
Side Bracket





**PA8-V4A**  
Round Bracket



**E8-VA**  
Swivel Eye




**MA8-V4A**  
Bearing Shoe




<sup>1</sup>Attention! Max. static load in Newtons. Beware force increase during compression (progression) and observe max. force limit.

**M8x1.25 (for GS-19-VA, GS-22-VA, GZ-19-VA)**


**G8-VA**  
Ball Socket




**NG8-V4A**  
Angle Bracket



**OG8-V4A**  
Side Bracket

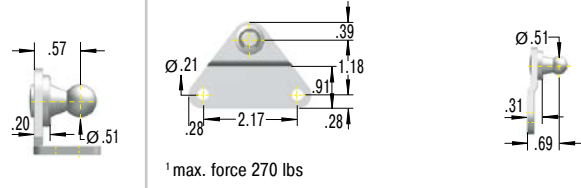


**PG8-V4A**  
Round Bracket

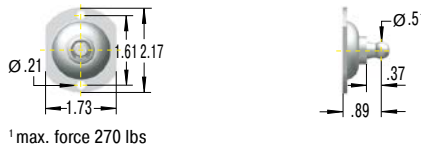


**M10x1.5 (for GS-28-VA, GZ-28-VA)**


**C10-VA**  
Angle Ball Joint




**D10-VA**  
Clevis Fork




**E10-VA**  
Swivel Eye



**A10-VA**  
Eye




**MA10-V4A**  
Bearing Shoe

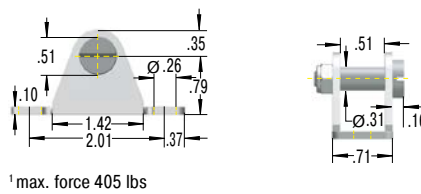

1 Attention! Max. static load in Newtons. Beware force increase during compression (progression) and observe max. force limit.


### M14x1.5 (for GS-40-VA, GZ-40-VA)

#### C14-VA Angle Ball Joint



<sup>1</sup> max. force 719 lbs


#### A14-VA Eye




<sup>1</sup> max. force 1,574 lbs




#### ME14-VA Bearing Shoe



<sup>1</sup> max. force 2,248 lbs




#### D14-VA Clevis Fork




<sup>1</sup> max. force 1,574 lbs




#### ND14-VA Mounting Flange



<sup>1</sup> max. force 2,248 lbs




#### E14-VA Swivel Eye




<sup>1</sup> max. force 1,574 lbs



#### ME14-VA Bearing Shoe



<sup>1</sup> max. force 2,248 lbs



<sup>1</sup> Attention! Max. static load in Newtons. Beware force increase during compression (progression) and observe max. force limit.

## Hydraulic Feed Controls

### Regulate feed rates in the best way

**ACE Hydraulic feed controls are recommended as the perfect solution when sawing, cutting, drilling and in order to prevent the stick-slip effect on pneumatic cylinders. They can be precisely adjusted and provide speeds from 1/2"/min. (12 mm/min.) with a very low feed force or up to 1.5"/min. (38 m/min.) with a high feed rate**

These maintenance-free, ready-to-install hydraulic feed controls are self-contained hydraulic elements regulated by a precision throttle. The feed rate is set from the outside by turning the setting adjuster. The tried-and-tested rolling diaphragms used in many ACE shock absorbers also serve as a dynamic sealing element for a hermetic seal as well as volume compensation for the piston rod and provide the resetting of the piston when the force is removed.



## Hydraulic Feed Controls



### VC25

Adjustable

**For precision adjustment of feed rates**

Handling modules, Linear slides, Automatic machinery,  
Conveyor equipment

Page 228



### MA, MVC

Adjustable

**Designed for applications with low precision requirements**

Handling modules, Linear slides, Automatic machinery,  
Conveyor equipment

Page 230

Shorter processing times

Different feed rates

Adjustment segment at the lower end of the feed control

Most accurate calibrations

Available immediately

Easy to mount



## VC25

For precision adjustment of feed rates

### Adjustable


**Compression force 6.74 lbs to 787 lbs**

**Stroke 0.59 in to 4.92 in**

Precise adjustment for any type of application: Hydraulic feed controls of the product family VC are ideally suited for the precise tuning of constant feed rates. The thread of the outer body of this closed hydraulic element allows simple assembly. Smooth outer bodies can also be supplied.

As the hydraulic oil is forced out through the throttle opening, a constant feed rate is achieved on the stroke. In the models up to 2.17" (55 mm) stroke, the tried and tested rolling diaphragm, known from ACE shock absorbers, serves as a dynamic seal, as volume compensation of the piston rod and as a reset element.

Precision hydraulic feed controls of the product family VC are used in automotive and industrial applications as well as in mechanical engineering and the electronics industry.

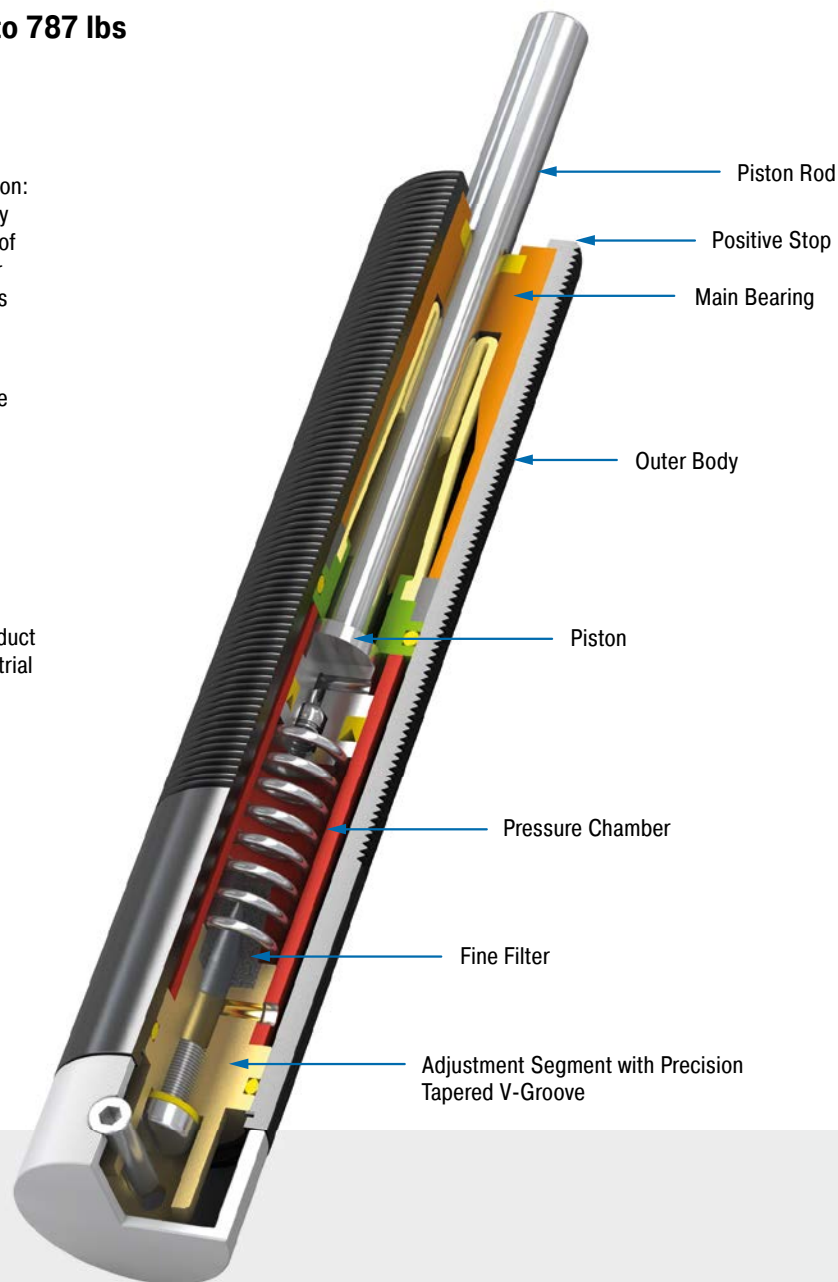

### Technical Data

**Compression force:** 6.74 lbs to 787 lbs

**Execution:** F = Ø 0.94 in without thread  
FT = M25x1.5 threaded body

**Piston rod diameter:** Ø 0.31 in

**Feed rate/Compression force:**

Min. 0.51 in/min. with 90 lbs;  
Max. 1,500 in/min. with 787 lbs

**Impact velocity range:** At speeds of 0.98 ft/sec the maximum allowed energy is approx. 8.85 in-lbs for units up to 2.16 in stroke and approx. 17.70 in-lbs for units 2.95 in to 4.92 in stroke. Where higher energies occur use a shock absorber for the initial impact. Avoid high impact velocities.

**Adjustment:** Infinitely adjustable

**Positive stop:** External positive stops 0.04 in to 0.06 in before the end of stroke provided by the customer.

**Damping medium:** Oil, temperature stable

**Material:** Outer body: Black anodized aluminium ; Piston rod: Hard chrome plated steel ; Accessories: Steel with black oxide finish or nitride hardened

**Mounting:** In any position

**Operating temperature range:** 32 °F to 140 °F

**Application field:** Handling modules, Linear slides, Automatic machinery, Conveyor equipment, Absorption control


**Note:** Nylon button can be fitted onto piston rod. Unit may be mounted in any position.

**Safety information:** Do not rotate piston rod, if excessive rotation force is applied rolling seal may rupture. External materials in the surrounding area can attack the seal components and lead to a shorter service life. Please contact ACE for appropriate solution suggestions.


**On request:** Special oil and other special options available on request.

Adjustable

### VC25FT

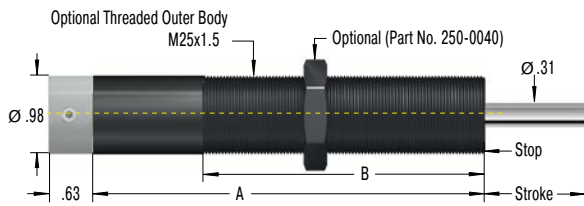


### SP25 Air Bleed Collar




For VC2515FT to VC2555FT  
reduction of the stroke 0.25 inch


### 250-0044 Mounting Block



### VC25F

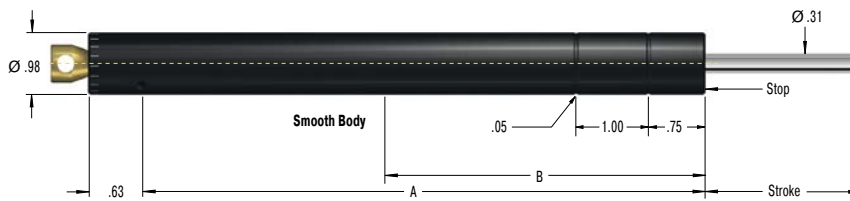


### SP25 Air Bleed Collar



For VC2515FT to VC2555FT  
reduction of the stroke 0.25 inch

### 250-0044 Mounting Block



Additional accessories, mounting, installation ... see from page 47.

### Complete details required when ordering

- Load to be decelerated: W (lbs)
- Impact velocity: v (ft/s)
- Propelling force: F (lbs)
- Operating cycles per hour: c (/hr)
- Number of absorbers in parallel: n
- Ambient temperature: °F

### Ordering Example

Type (Feed Control) \_\_\_\_\_ **VC2555FT**  
 25 for Thread Size M25 \_\_\_\_\_  
 Stroke 2.16" (55 mm) \_\_\_\_\_  
 FT = with thread M25x1.5 \_\_\_\_\_  
 F = without thread, plain body (Ø 0.94" / 23.8 mm)


### Performance and Dimensions

TYPES	Stroke inch	A inch	B inch	Compression force		Return Force		Return Time s	Side Load Angle max. °	Weight lbs
				min. lbs	max. lbs	min. lbs	max. lbs			
VC2515FT	0.59	5.04	3.15	6.74	787	3.37	6.74	0.2	3	0.529
VC2530FT	1.18	6.34	4.33	6.74	787	1.12	6.74	0.4	2	0.617
VC2555FT	2.16	8.23	5.19	7.87	787	1.12	8.99	1.2	2	0.926
VC2575FT	2.95	11.14	5.90	11.24	787	2.25	11.24	1.7	2	1.058
VC25100FT	3.94	12.13	5.90	13.49	787	2.25	11.24	2.3	1	1.103
VC25125FT	4.92	13.13	5.90	15.74	787	2.25	13.49	2.8	1	1.191
VC2515F	0.59	5.04	3.15	6.74	787	3.37	6.74	0.2	3	0.529
VC2530F	1.18	6.34	4.33	6.74	787	1.12	6.74	0.4	2	0.617
VC2555F	2.16	8.23	5.19	7.87	787	1.12	8.99	1.2	2	0.926
VC2575F	2.95	11.14	5.90	11.24	787	2.25	11.24	1.7	2	1.058
VC25100F	3.94	12.13	5.90	13.49	787	2.25	11.24	2.3	1	1.103
VC25125F	4.92	13.13	5.90	15.74	787	2.25	13.49	2.8	1	1.191


Suffix FT: M25x1.5 threaded body.

Suffix F: plain body 23.8 mm dia. (without thread), with optional clamp type mounting block.

### Operating range VC

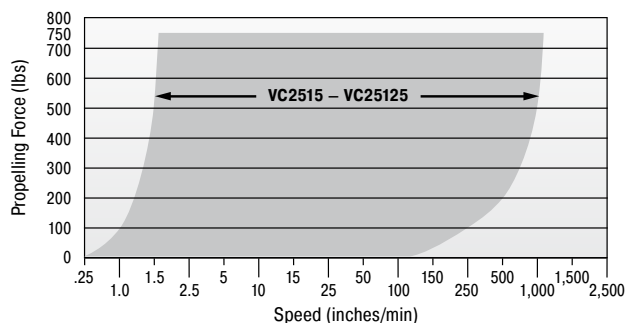

### Accessories with Mounting Example



Mounting with clamp mount



Installed with air bleed collar SP25 (part no. 10783-000)

## MA, MVC

Designed for applications with low precision requirements

### Adjustable

**Compression force 2 lbs to 800 lbs**


**Stroke 0.28 in to 1.58 in**

Many application options: the hydraulic feed controls in models MA and MVC are similar to that of the VC model. However, these hydraulic controls have been designed for applications that require less precision.

There are also plenty of accessories for the MA and MVC models. All products are ready-to-install, maintenance-free, stable in temperature and avoid stick-slip effect. Speeds from 0.47"/min. (12 mm/min.) can be driven at a low thrust force using the adjustment screw on the base of the hydraulic control.

Hydraulic feed controls with the designations MA and MVC are especially used in handling modules or linear carriages and also for applications with changing usage data.

### Operating Range MVC225 to MVC900

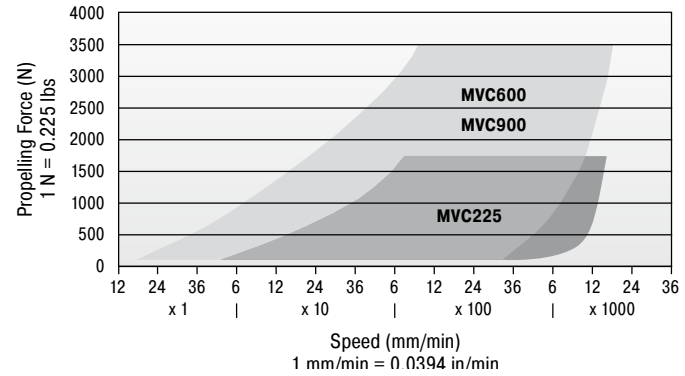

### Performance and Dimensions

TYPES	Stroke inch	Compression force min. lbs	Compression force max. lbs	Return Force min. lbs	Return Force max. lbs	Return Time s	<sup>1</sup> Side Load Angle max. °	M	Weight lbs
MA30M	0.32	2	18	1.16	1.57	0.3	2	M8x1	0.029
MA50M	0.28	9	36	0.47	1.80	0.3	2	M10x1	0.055
MA35	0.40	3.3	45	1.20	2.60	0.2	2	1/2-20 UNF / M12x1	0.095
MA150	0.50	4.5	67.4	0.70	1.20	0.4	2	9/16-18 UNF / M14x1.5	0.135
MVC225	0.75	5	400	1.05	2.15	0.65	2	3/4-16 UNF / M20x1.5	0.381
MVC600	1.00	14	800	2.40	6.87	0.85	2	1-12 UNF / M25x1.5	0.776
MVC900	1.58	15	800	2.40	7.40	0.95	2	1-12 UNF / M25x1.5	0.913

<sup>1</sup> For applications with higher side load angles consider using the side load adaptor, pages 44 to 49.

### Technical Data

**Compression force:** 2 lbs to 800 lbs

**Execution:** Thread M8 to M25

**Impact velocity range:** At speeds of 0.98 ft/sec the maximum allowed energy is approx. 17.70 in-lbs. Where higher energies occur use a shock absorber for the initial impact. Avoid high impact velocities.

**Adjustment:** Hard impact at the start of stroke, turn towards 9 or PLUS. Hard impact at the end of stroke, turn towards 0 or MINUS.

**Positive stop:** Integrated

**Damping medium:** Oil, temperature stable

**Material:** Outer body: Nitride hardened steel; Piston rod: Steel with black oxide finish or nitride hardened

**Mounting:** In any position

**Operating temperature range:** 32 °F to 150 °F

**Application field:** Handling modules, Linear slides, Automatic machinery, Conveyor equipment, Absorption control

**Note:** Damper is preset at delivery in a neutral position between hard and soft.

**Safety information:** External materials in the surrounding area can attack the seal components and lead to a shorter service life. Please contact ACE for appropriate solution suggestions.


**On request:** Nickel-plated, weartec finish (seawater resistant) or other special options available on request.




Products for UNF and metric thread available

Adjustable


### MA30M

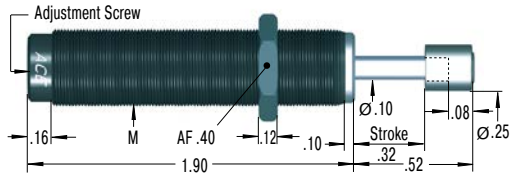

### MA50M

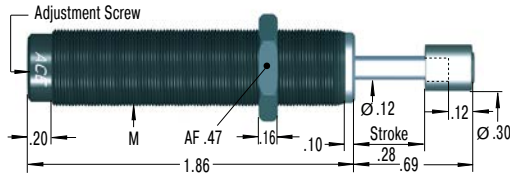


### MA35

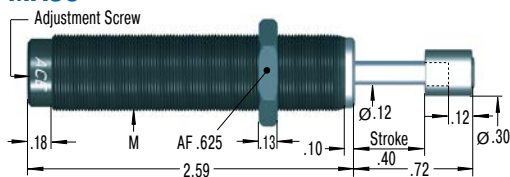


Product available for UNF and metric thread (for metric add suffix -M from part number)

### MA150

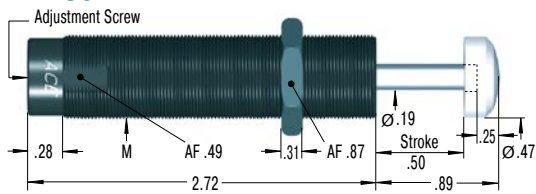


Product available for UNF and metric thread (for metric add suffix -M from part number)

### MVC225

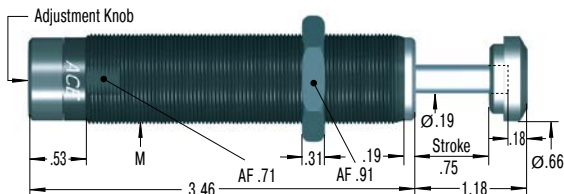


Product available for UNF and metric thread (for metric add suffix -M from part number)

### MVC600

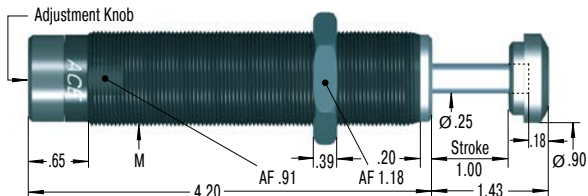


Product available for UNF and metric thread (for metric add suffix -M from part number)

### MVC900

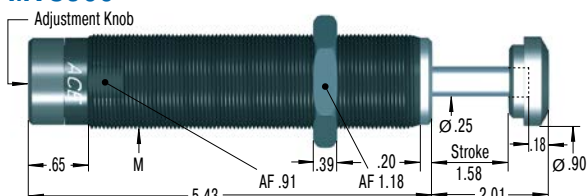


Product available for UNF and metric thread (for metric add suffix -M from part number)


### 250-0307 Mounting Block




### 250-0308 Mounting Block

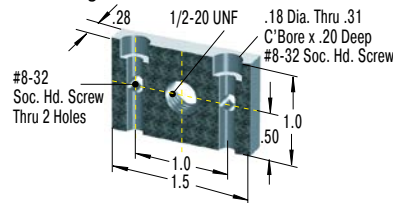


### 250-0309 Mounting Block




### 250-0318 Mounting Block

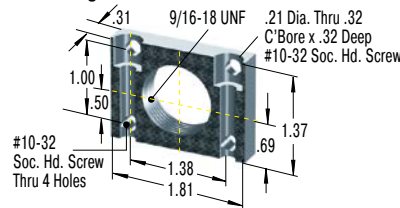


### 250-0352 Mounting Block




### 250-0401 Mounting Block

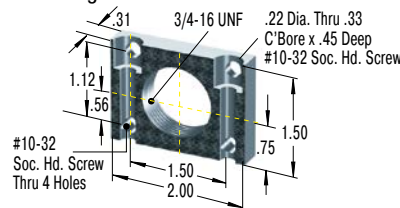


### 250-0353 Mounting Block




### 250-0402 Mounting Block

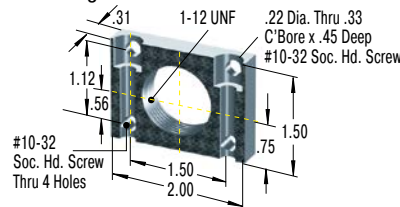


### 250-0044 Mounting Block



### 250-0402 Mounting Block

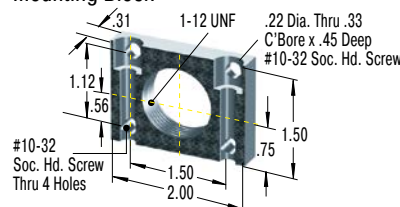

### 250-0044 Mounting Block



Additional accessories, mounting, installation ... see from page 44.

# Rotary Dampers


## Small dampers refine your design

**ACE rotary dampers provide an invisible yet valuable service as a maintenance-free machine element to allow controlled deceleration of rotary or linear movements.**

They are often necessary to make careful opening and closing of small lids, compartments and drawers possible. They protect sensitive components while increasing the quality and value of products. They are easy to integrate. The harmoniously gentle movements of these little decelerators can be achieved with continual rotation or with limited pivoting angles. They slow down left, right or bi-directional rotation. Suitable for almost any application and also available in adjustable variations, they provide braking torques of 0.44 in-lbs to 354 in-lbs.

### Partial Rotation Angle, Adjustable

e.g. FYT-H1 and FYN-H1

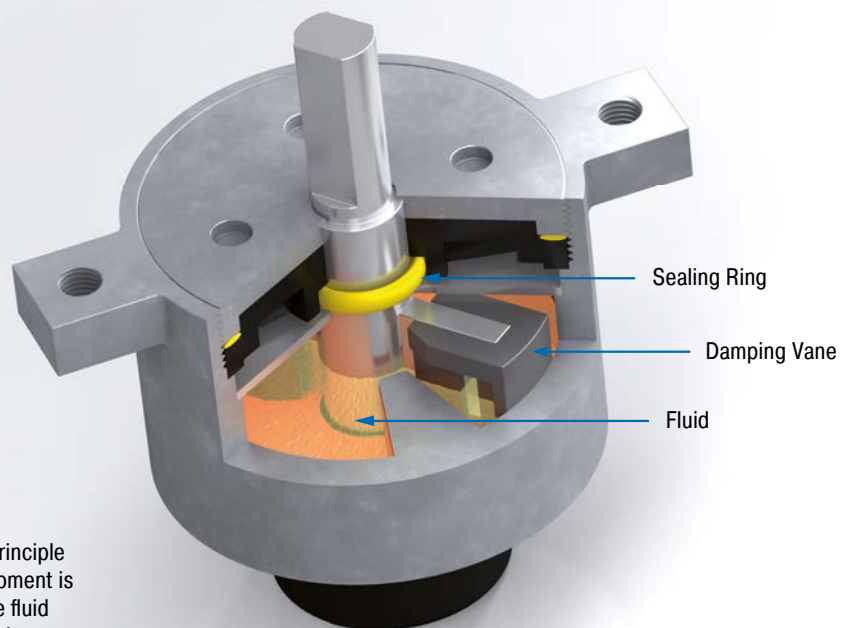

### General Function

Rotary dampers operate on the principle of fluid damping. The damping moment is determined by the viscosity of the fluid and the dimensioning of the throttle gap or throttle orifices.



**Rotary Dampers with Continuous Rotation**

Rotate for the plus in quality: For smooth, quiet movements of small hoods, flaps and fans these continuously rotating rotary dampers from ACE decelerate either right, left or two-sided rotation right in the pivot point or linear through a gear and gear rack. The harmoniously gentle process protects components and increases the quality and value of products. The maintenance-free, ready-to-install ACE rotary dampers are filled with an inert fluid, usually silicone oil. The viscosity of the fluid and the sizing of the throttling gap determine the damping torque. The FFD series is the only exception: These fluid-free rotary dampers operate according to the principle of friction.

The continuously rotating rotary dampers with the designations FRT, FRN, FFD, FDT and FDN are used in household and medical devices as well as in the automotive, electronics and furniture industries.



**Rotary Dampers with Partial Rotation Angle**

For controlled and gentle deceleration: The damping direction of this rotary damper, which is available with adjustable damping torque, can be right, left or two-sided rotation. They can be installed directly in the pivot point of a construction and achieve uniform, quiet movements, which increases quality and value and protects sensitive components. The products are maintenance-free, ready-to-install and filled with an inert fluid, usually silicone oil. A rotor movement presses the fluid from one chamber into the other. The damping torque is determined by the viscosity of the fluid and the sizing of the throttling gap the throttle holes. During each reversal of movement, depending on the frame size a certain return damping torque develops.

These solutions are used in the automotive sector, in many industrial applications, in the electronics and furniture industries as well as in medical devices.


**High protection of sensitive components**

**Various designs for every application**

**Maintenance-free and ready-to-install**


**Partial Rotation Angle**

e.g. FYN-N1

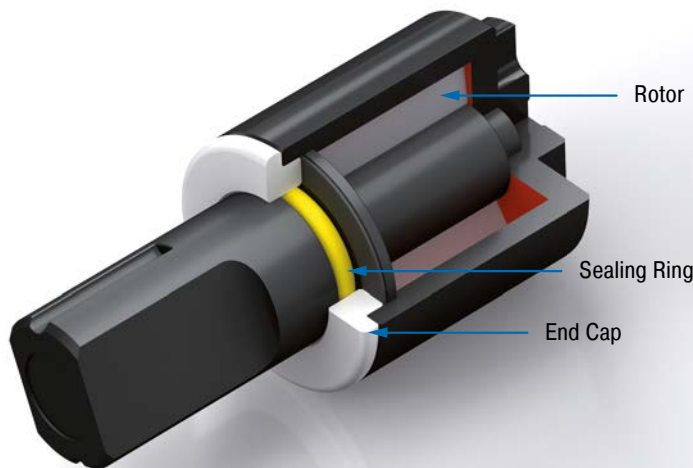

**Continuous Rotation**

e.g. FRT-E2

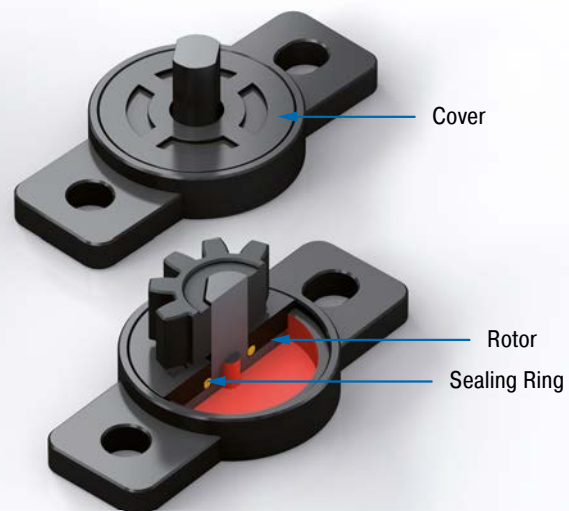

## Rotary Dampers



### Continuous rotation



#### FRT-E2

Page 236

Continuous Rotation  
**Small and lightweight for finest braking**



#### FRT-G2

Page 237

Continuous Rotation  
**Small and lightweight for finest braking**



#### FRT-C2 and FRN-C2

Page 238

Continuous Rotation  
**Flexible and cost efficient use**



#### FRT-D2 and FRN-D2

Page 239

Continuous Rotation  
**Flexible and cost efficient use**



#### FRT-F2/K2 and FRN-F2/K2

Page 240

Continuous Rotation  
**For a long service life**



#### FFD

Page 241

Continuous Rotation  
**Precise braking without oil**



#### FDT

Page 242

Continuous Rotation  
**The flat disc brake for two-sided damping**



#### FDN

Page 243

Continuous Rotation  
**The flat disc brake for one direction of rotation**

## Rotary Dampers



### FYN-P1

Page 244

Partial Rotation Angle  
**Small diameter, large damping torques**



### FYN-N1

Page 245

Partial Rotation Angle  
**Small diameter, large damping torques**



### FYN-U1

Page 246

Partial Rotation Angle  
**Small, strong and very robust**



### FYN-S1

Page 247

Partial Rotation Angle  
**The flat damper for constant component protection**



### FYT-H1 and FYN-H1

Page 248

Partial Rotation Angle, Adjustable  
**Specifically adjustable, strong braking force**



### FYT-LA3 and FYN-LA3

Page 249

Partial Rotation Angle, Adjustable  
**Adjustable high performance**

## FRT-E2

Small and lightweight for finest braking

### Continuous Rotation

Damping torque **0.009 in-lbs to 0.035 in-lbs**

The damping direction of the smallest ACE FRT-E2 rotary dampers with plastic body is rotating on both sides. They can brake directly in the pivot point or linear through a gear and gear rack. ACE rotary dampers are maintenance-free and ready-to-install.

Rotary damper products are built to metric specifications. For precise measurements, please refer to the ACE rotary damper catalog or contact an application expert.



### Technical Data

**Construction size:**  $\varnothing$  0.39 in

**Rotational speed max.:** 50 rpm

**Lifetime:** 50,000 cycles (1 cycle = 360° left-hand, 360° right-hand). Even after this time, the dampers still produce over approx. 80 % of their original damping moment. The service life may be significantly higher or lower, depending on the application.

**Operating temperature range:** 32 °F to 122 °F

**Pressure angle:** 20°

**Material:** Outer body, Shaft, Gear: Plastic

**Mounting:** In any position

**Tooth:** Involute gearing

**P.C.D.:** 0.24 in

**No. of teeth:** 10

**Module:** 0.6


**Mounting information:** No axial or radial forces may be induced via the shaft.

**Safety information:** Do not use rotary dampers as supports. Provide an external guide or support.



**On request:** Special designs available on request. Toothed plastic racks (modules 0.5 to 1.0) are available for the rotary dampers with pinions.

### Characteristics

#### At 73 °F ambient temperature

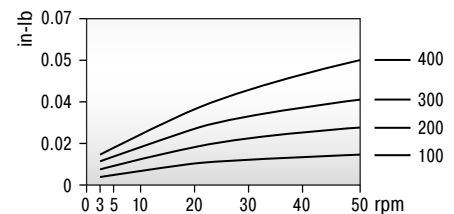

#### At 20 rpm rotational speed

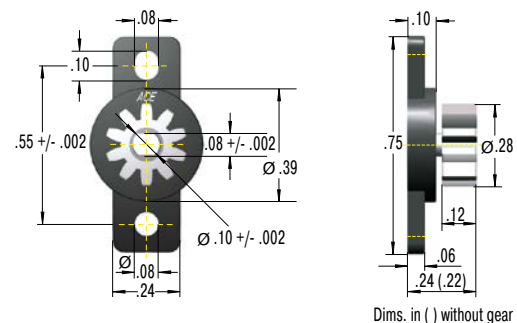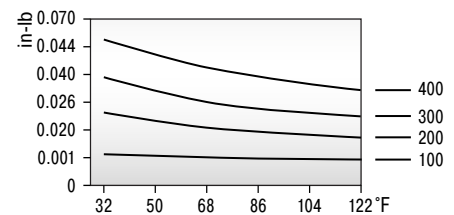

### Performance

TYPES	<sup>1</sup> Damping torque in-lbs	Damping direction	Gear	Weight lbs
FRT-E2-100	0.009 +/- 0.004	bidirectional	without	0.00071
FRT-E2-200	0.018 +/- 0.006	bidirectional	without	0.00071
FRT-E2-300	0.026 +/- 0.007	bidirectional	without	0.00071
FRT-E2-400	0.035 +/- 0.009	bidirectional	without	0.00071
FRT-E2-100-G1	0.009 +/- 0.004	bidirectional	with	0.00090
FRT-E2-200-G1	0.018 +/- 0.006	bidirectional	with	0.00090
FRT-E2-300-G1	0.026 +/- 0.007	bidirectional	with	0.00090
FRT-E2-400-G1	0.035 +/- 0.009	bidirectional	with	0.00090

<sup>1</sup> The indicated damping torque refers to a rotational speed of 20 rpm and an ambient temperature of 73 °F.

## FRT-G2

Small and lightweight for finest braking

### Continuous Rotation

Damping torque 0.018 in-lbs to 0.088 in-lbs

The damping direction of the ACE FRT-G2 product family with plastic body is rotating on both sides. The small rotary dampers can brake directly in the pivot point or linear through a gear and gear rack. ACE rotary dampers are maintenance-free and ready-to-install.

Rotary damper products are built to metric specifications. For precise measurements, please refer to the ACE rotary damper catalog or contact an application expert.



### Technical Data

**Construction size:**  $\varnothing$  0.59 in

**Rotational speed max.:** 50 rpm

**Lifetime:** 50,000 cycles (1 cycle = 360° left-hand, 360° right-hand). Even after this time, the dampers still produce over approx. 80 % of their original damping moment. The service life may be significantly higher or lower, depending on the application.

**Operating temperature range:** 32 °F to 122 °F

**Pressure angle:** 20°

**Material:** Outer body, Shaft, Gear: Plastic

**Mounting:** In any position

**Tooth:** Involute gearing

**P.C.D.:** 0.28 in

**No. of teeth:** 14

**Module:** 0.5


**Mounting information:** No axial or radial forces may be induced via the shaft.

**Safety information:** Do not use rotary dampers as supports. Provide an external guide or support.



**On request:** Special designs available on request. Toothed plastic racks (modules 0.5 to 1.0) are available for the rotary dampers with pinions.

### Characteristics

#### At 73 °F ambient temperature

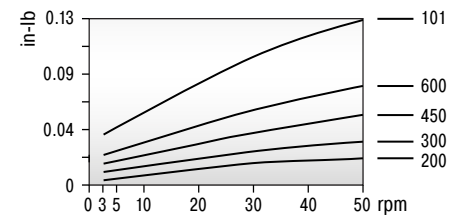

#### At 20 rpm rotational speed

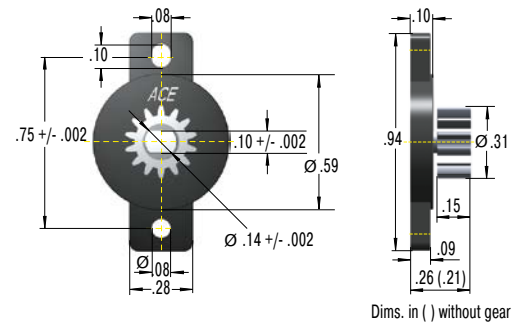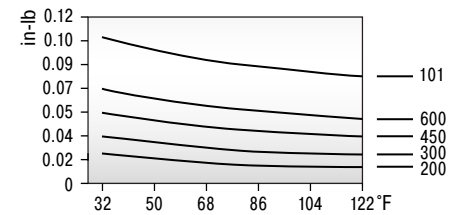

Dims. in ( ) without gear

Performance				
TYPES	<sup>1</sup> Damping torque in-lbs	Damping direction	Gear	Weight lbs
FRT-G2-200	0.018 +/- 0.006	bidirectional	without	0.00132
FRT-G2-300	0.026 +/- 0.007	bidirectional	without	0.00132
FRT-G2-450	0.041 +/- 0.009	bidirectional	without	0.00132
FRT-G2-600	0.053 +/- 0.011	bidirectional	without	0.00132
FRT-G2-101	0.088 +/- 0.018	bidirectional	without	0.00132
FRT-G2-200-G1	0.018 +/- 0.006	bidirectional	with	0.00176
FRT-G2-300-G1	0.027 +/- 0.007	bidirectional	with	0.00176
FRT-G2-450-G1	0.041 +/- 0.009	bidirectional	with	0.00176
FRT-G2-600-G1	0.053 +/- 0.011	bidirectional	with	0.00176
FRT-G2-101-G1	0.088 +/- 0.018	bidirectional	with	0.00176

<sup>1</sup> The indicated damping torque refers to a rotational speed of 20 rpm and an ambient temperature of 73 °F.

## FRT-C2 and FRN-C2

Flexible and cost efficient use

### Continuous Rotation

Damping torque 0.18 in-lbs to 0.27 in-lbs

The damping direction of the simple FRT-C2 and FRN-C2 is either right, left or two-sided rotation. These ACE rotary dampers with plastic body can decelerate directly in the pivot point or linear through a gear and gear rack. ACE rotary dampers are maintenance-free and ready-to-install.

Rotary damper products are built to metric specifications. For precise measurements, please refer to the ACE rotary damper catalog or contact an application expert.



### Technical Data

**Construction size:** Ø 0.59 in

**Rotational speed max.:** 50 rpm

**Lifetime:** 50,000 cycles (1 cycle = 360° left-hand, 360° right-hand). Even after this time, the dampers still produce over approx. 80 % of their original damping moment. The service life may be significantly higher or lower, depending on the application.

**Operating temperature range:** 32 °F to 122 °F

**Pressure angle:** 20°

**Material:** Outer body, Gear: Plastic ; Shaft: Plastic, steel

**Mounting:** In any position

**Tooth:** Involute gearing

**P.C.D.:** 0.35 in

**No. of teeth:** 11

**Module:** 0.8


**Mounting information:** No axial or radial forces may be induced via the shaft.

**Safety information:** Do not use rotary dampers as supports. Provide an external guide or support.



**On request:** Special designs available on request. Toothed plastic racks (modules 0.5 to 1.0) are available for the rotary dampers with pinions.

### Characteristics

At 73 °F ambient temperature

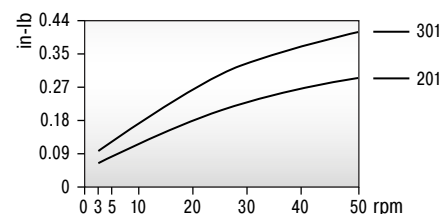

At 20 rpm rotational speed

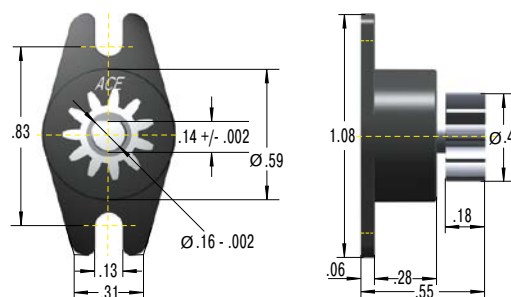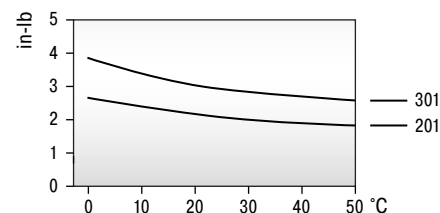

### Performance

TYPES	<sup>1</sup> Damping torque in-lbs	Damping direction	Gear	Weight lbs
FRT-C2-201	0.18 +/- 0.05	bidirectional	without	0.005
FRT-C2-301	0.27 +/- 0.07	bidirectional	without	0.005
FRT-C2-201-G1	0.18 +/- 0.05	bidirectional	with	0.005
FRT-C2-301-G1	0.27 +/- 0.07	bidirectional	with	0.005
FRN-C2-R201	0.18 +/- 0.05	right	without	0.004
FRN-C2-R301	0.27 +/- 0.07	right	without	0.004
FRN-C2-R201-G1	0.18 +/- 0.05	right	with	0.004
FRN-C2-R301-G1	0.27 +/- 0.07	right	with	0.004
FRN-C2-L201	0.18 +/- 0.05	left	without	0.004
FRN-C2-L301	0.27 +/- 0.07	left	without	0.004
FRN-C2-L201-G1	0.18 +/- 0.05	left	with	0.004
FRN-C2-L301-G1	0.27 +/- 0.07	left	with	0.004

<sup>1</sup> The indicated damping torque refers to a rotational speed of 20 rpm and an ambient temperature of 73 °F.



## FRT-D2 and FRN-D2

Flexible and cost efficient use

### Continuous Rotation

Damping torque **0.44 in-lbs to 2.21 in-lbs**

The damping direction of the ACE FRT-D2 and FRN-D2 rotary dampers with plastic body is either the right, left or two-sided rotation. They can decelerate directly in the pivot point or linear through a gear and gear rack. ACE rotary dampers are maintenance-free and ready-to-install.

Rotary damper products are built to metric specifications. For precise measurements, please refer to the ACE rotary damper catalog or contact an application expert.



### Technical Data

**Construction size:** Ø 1 in

**Rotational speed max.:** 50 rpm

**Lifetime:** 50,000 cycles (1 cycle = 360° left-hand, 360° right-hand). Even after this time, the dampers still produce over approx. 80 % of their original damping moment. The service life may be significantly higher or lower, depending on the application.

**Operating temperature range:** 32 °F to 122 °F

**Pressure angle:** 20°

**Material:** Outer body, Gear: Plastic ; Shaft: Plastic, steel

**Mounting:** In any position

**Tooth:** Involute gearing (addendum modification coefficient: +0.375)

**P.C.D.:** 0.47 in

**No. of teeth:** 12

**Module:** 1


**Mounting information:** No axial or radial forces may be induced via the shaft.

**Safety information:** Do not use rotary dampers as supports. Provide an external guide or support.



**On request:** Special designs available on request. Toothed plastic racks (modules 0.5 to 1.0) are available for the rotary dampers with pinions.

### Characteristics

At 73 °F ambient temperature

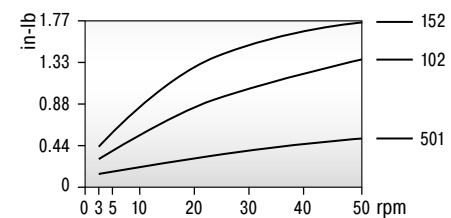

At 20 rpm rotational speed

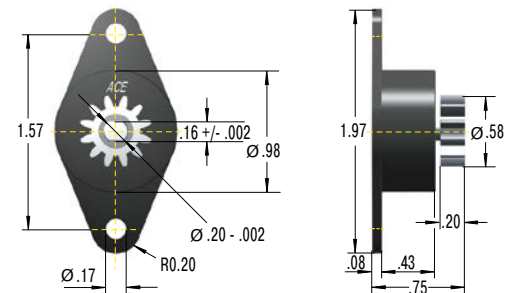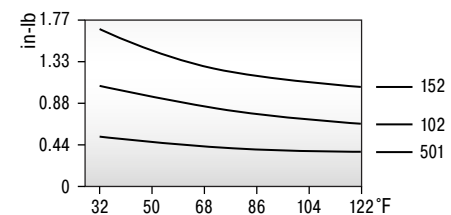

### Performance

TYPES	<sup>1</sup> Damping torque in-lbs	Damping direction	Gear	Weight lbs
FRT-D2-102	0.88 +/- 0.18	bidirectional	without	0.018
FRT-D2-152	1.33 +/- 0.26	bidirectional	without	0.018
FRT-D2-501	0.44 +/- 0.09	bidirectional	without	0.018
FRT-D2-102-G1	0.88 +/- 0.18	bidirectional	with	0.019
FRT-D2-152-G1	1.33 +/- 0.26	bidirectional	with	0.019
FRT-D2-501-G1	0.44 +/- 0.09	bidirectional	with	0.019
FRN-D2-R102	0.88 +/- 0.18	right	without	0.026
FRN-D2-R152	1.33 +/- 0.26	right	without	0.026
FRN-D2-R501	0.44 +/- 0.09	right	without	0.026
FRN-D2-R102-G1	0.88 +/- 0.18	right	with	0.028
FRN-D2-R152-G1	1.33 +/- 0.26	right	with	0.028
FRN-D2-R501-G1	0.44 +/- 0.09	right	with	0.028
FRN-D2-L102	0.88 +/- 0.18	left	without	0.026
FRN-D2-L152	1.33 +/- 0.26	left	without	0.026
FRN-D2-L501	0.44 +/- 0.09	left	without	0.026
FRN-D2-L102-G1	0.88 +/- 0.18	left	with	0.028
FRN-D2-L152-G1	1.33 +/- 0.26	left	with	0.028
FRN-D2-L501-G1	0.44 +/- 0.09	left	with	0.028

<sup>1</sup> The indicated damping torque refers to a rotational speed of 20 rpm and an ambient temperature of 73 °F.

## FRT-F2/K2 and FRN-F2/K2

For a long service life

### Continuous Rotation

**Damping torque 4.42 in-lbs to 26.55 in-lbs**

The damping direction of FRT F2/K2 and FRN-F2/K2 is either the right, left or two-sided rotation. With a damping torque of up to 35.4 in-lbs, this product family can even handle heavy components. These ACE rotary dampers can decelerate directly in the pivot point or linear through a gear and gear rack. They are maintenance-free and ready-to-install.

Rotary damper products are built to metric specifications. For precise measurements, please refer to the ACE rotary damper catalog or contact an application expert.



### Technical Data

**Construction size:** Ø 1.57 in-lbs

**Rotational speed max.:** 50 rpm

**Lifetime:** 50,000 cycles (1 cycle = 360° left-hand, 360° right-hand). Even after this time, the dampers still produce over approx. 80 % of their original damping moment. The service life may be significantly higher or lower, depending on the application.

**Operating temperature range:** 32 °F to 122 °F

**Material:** Outer body: Plastic ; Shaft: Steel

**Mounting:** In any position


**Mounting information:** No axial or radial forces may be induced via the shaft.

**Safety information:** Do not use rotary dampers as supports. Provide an external guide or support.



**On request:** Special designs available on request.

### Characteristics

#### At 73 °F ambient temperature

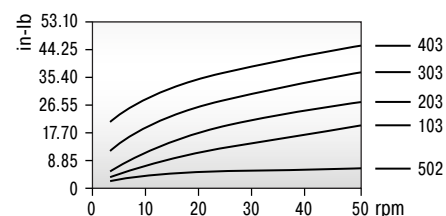

#### At 20 rpm rotational speed

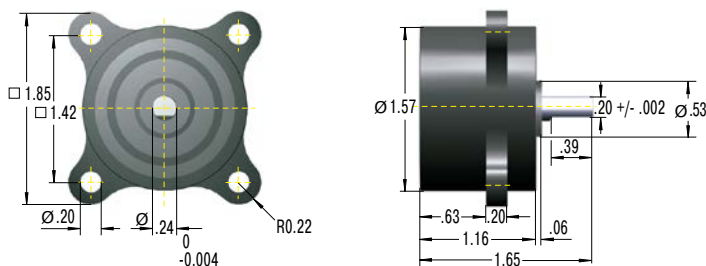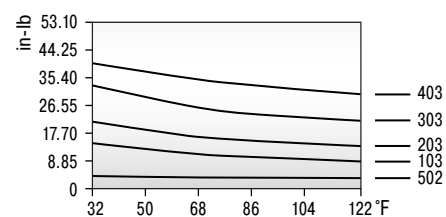

### Performance

TYPES	<sup>1</sup> Damping torque in-lbs	Damping direction	Weight lbs
FRT-K2-502	4.42 +/- 0.88	bidirectional	0.176
FRT-K2-103	8.85 +/- 1.77	bidirectional	0.176
FRT-F2-203	17.70 +/- 3.54	bidirectional	0.254
FRT-F2-303	26.55 +/- 7.08	bidirectional	0.254
FRT-F2-403	35.40 +/- 8.85	bidirectional	0.254
FRN-K2-R502	4.42 +/- 0.88	right	0.126
FRN-K2-R103	8.85 +/- 1.77	right	0.126
FRN-F2-R203	17.70 +/- 3.54	right	0.198
FRN-K2-L502	4.42 +/- 0.88	left	0.126
FRN-K2-L103	8.85 +/- 1.77	left	0.126
FRN-F2-L203	17.70 +/- 3.54	left	0.198

<sup>1</sup> The indicated damping torque refers to a rotational speed of 20 rpm and an ambient temperature of 73 °F.

## FFD

Precise braking without oil

### Continuous Rotation

Damping torque 0.89 in-lbs to 26.55 in-lbs

In comparison to other rotary dampers, the ACE FFD product family does not need any fluid to generate the damping torque, but rather works on the principle of friction. That means temperature or speed changes have virtually no influence on the damping torque. The FFD is available in two different body variants and two types of bearings. ACE rotary dampers are maintenance-free and ready-to-install.

Rotary damper products are built to metric specifications. For precise measurements, please refer to the ACE rotary damper catalog or contact an application expert.



### Technical Data

**Construction size:** Ø 0.98 in to 1.18 in

**Rotational speed max.:** 30 rpm

**Lifetime:** 30,000 cycles (1 cycle = 360° left-hand, 360° right-hand). Even after this time, the dampers still produce over approx. 80 % of their original damping moment. The service life may be significantly higher or lower, depending on the application.

**Operating temperature range:** 14 °F to 140 °F

**Material:** Outer body: Plastic

**Mounting:** In any position

**Information to the shaft:** Ø +0 / -0.001  
Hardness > HRC55, surface smoothness R<sub>z</sub> < 1µm


**Mounting information:** Turn the shaft in the opposite direction to the brake direction to avoid damaging the freewheel mount. No axial or radial forces may be induced via the shaft.

**Safety information:** Do not use rotary dampers as supports. Provide an external guide or support.

**On request:** Special designs available on request.

### Ordering Example

**FFD-25-FS-L-102**

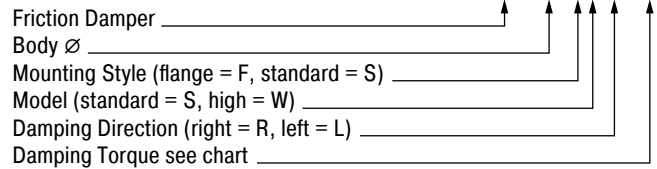


### Complete details required when ordering

- Damping torque 102 = 0.89 lbs
  - Damping torque 502 = 4.43 lbs
  - Damping torque 103 = 8.85 lbs
  - Damping torque 153 = 13.28 lbs
  - Damping torque 203 = 17.70 lbs
  - Damping torque 253 = 22.13 lbs
  - Damping torque 303 = 26.55 lbs
- Note dimension C.

### Model Type Prefix

- FS = Mounting Style with Flange, Model standard
  - FW = Mounting Style with Flange, Model high
  - SS = Mounting Style Standard, Model standard
  - SW = Mounting Style Standard, Model high
- Combinations with W for higher damping torque.

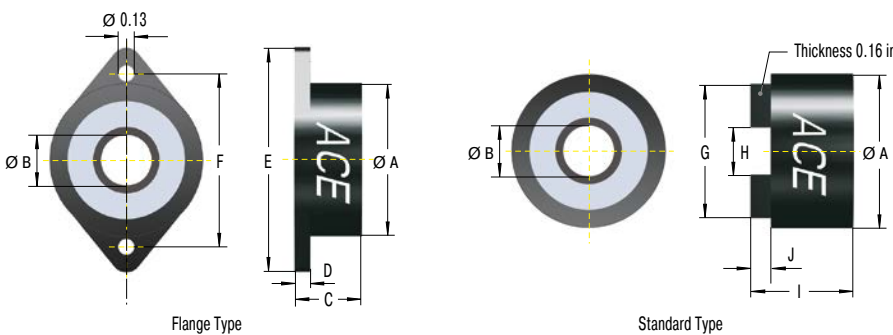

### Performance and Dimensions

TYPES	¹ Damping torque		Damping direction	Model	A	B	C	D	E	F	G	H	I	J	Weight
	in-lbs														
FFD-25SS	0.88/4.42/8.85	right or left	SS	0.98	0.24	0.51	0.12	1.65	1.34	0.83	0.24	0.63	0.15	0.026	
FFD-28SS	0.88/4.42/8.85	right or left	SS	1.10	0.31	0.51	0.12	1.65	1.42	0.94	0.32	0.63	0.15	0.031	
FFD-30SS	0.88/4.42/8.85/13.27	right or left	SS	1.18	0.39	0.51	0.12	1.81	1.5	1.02	0.4	0.63	0.15	0.035	
FFD-25FS	0.88/4.42/8.85	right or left	FS	0.98	0.24	0.51	0.12	1.65	1.34	0.83	0.24	0.63	0.15	0.029	
FFD-28FS	0.88/4.42/8.85	right or left	FS	1.10	0.31	0.75	0.12	1.65	1.42	0.94	0.32	0.63	0.15	0.031	
FFD-30FS	0.88/4.42/8.85/13.27	right or left	FS	1.18	0.39	0.51	0.12	1.81	1.5	1.02	0.4	0.63	0.15	0.037	
FFD-25SW	8.85/13.27/17.70	right or left	SW	0.98	0.24	0.75	0.12	1.65	1.34	0.83	0.24	0.87	0.15	0.051	
FFD-28SW	8.85/13.27/17.70	right or left	SW	1.10	0.31	0.75	0.12	1.65	1.42	0.94	0.32	0.87	0.15	0.055	
FFD-30SW	13.27/17.70/22.13/26.55	right or left	SW	1.18	0.39	0.75	0.12	1.81	1.5	1.02	0.4	0.87	0.15	0.066	
FFD-25FW	8.85/13.27/17.70	right or left	FW	0.98	0.24	0.75	0.12	1.65	1.34	0.83	0.24	0.87	0.15	0.053	
FFD-28FW	8.85/13.27/17.70	right or left	FW	1.10	0.31	0.75	0.12	1.65	1.42	0.94	0.32	0.87	0.15	0.060	
FFD-30FW	13.27/17.70/22.13/26.55	right or left	FW	1.18	0.39	0.75	0.12	1.81	1.5	1.02	0.4	0.87	0.15	0.068	

¹ The indicated damping torque refers to a rotational speed of 20 rpm and an ambient temperature of 73 °F.

## FDT

The flat disc brake for two-sided damping

### Continuous Rotation

Damping torque 4.43 in-lbs to 79.66 in-lbs

The damping direction of the flat constructive ACE rotary damper FDT with robust steel body is two-sided rotation. It can brake directly in the pivot point of the square receptacle. ACE rotary dampers are maintenance-free and ready-to-install.

Rotary damper products are built to metric specifications. For precise measurements, please refer to the ACE rotary damper catalog or contact an application expert.



### Technical Data

**Construction size:** Ø 1.85 in-lbs to 2.76 in-lbs

**Rotational speed max.:** 50 rpm

**Lifetime:** 50,000 cycles (1 cycle = 360° left-hand, 360° right-hand). Even after this time, the dampers still produce over approx. 80 % of their original damping moment. The service life may be significantly higher or lower, depending on the application.

**Operating temperature range:** 14 °F to 140 °F

**Material:** Outer body: Steel ; Output shaft sleeve: Nylon

**Mounting:** In any position


**Mounting information:** No axial or radial forces may be induced via the shaft.

**Safety information:** Do not use rotary dampers as supports. Provide an external guide or support.



**On request:** Special designs available on request.

### Characteristics

#### At 73 °F ambient temperature

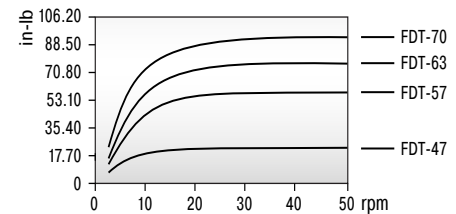

#### At 20 rpm rotational speed

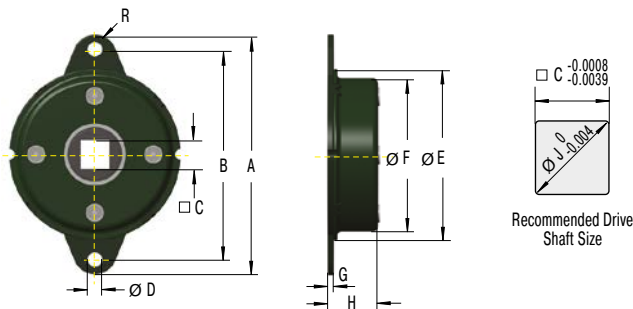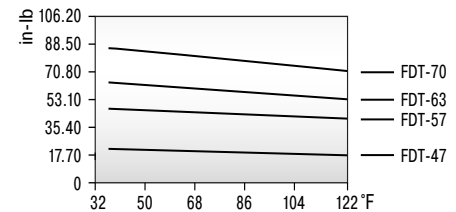

### Performance and Dimensions

TYPES	<sup>1</sup> Damping torque in-lbs	Damping direction	A inch	B inch	C inch	D inch	E inch	F inch	G inch	H inch	R inch	J inch	Weight lbs
FDT-47	17.70 +/- 2.66	bidirectional	2.55	2.20	0.31	0.18	1.85	1.68	0.06	0.40	4.5	0.40	0.110
FDT-57	41.60 +/- 4.43	bidirectional	3.11	2.68	0.40	0.22	2.24	2.06	0.06	0.44	5.5	0.50	0.165
FDT-63	59.30 +/- 6.20	bidirectional	3.50	3.00	0.49	0.25	2.48	2.30	0.06	0.44	6.5	0.67	0.209
FDT-70	77 +/- 7.08	bidirectional	3.74	3.23	0.49	0.25	2.76	2.57	0.06	0.44	6.5	0.67	0.243

<sup>1</sup> The indicated damping torque refers to a rotational speed of 20 rpm and an ambient temperature of 73 °F.

## FDN

The flat disc brake for one direction of rotation

### Continuous Rotation

Damping torque 4.43 in-lbs to 97.36 in-lbs

The damping direction of the flat, strong FDN rotary dampers with steel body can be either right or left rotation. They can brake directly in the pivot point. ACE rotary dampers are maintenance-free and ready-to-install.

Rotary damper products are built to metric specifications. For precise measurements, please refer to the ACE rotary damper catalog or contact an application expert.



### Technical Data

**Construction size:** Ø 1.85 in to 2.76 in

**Rotational speed max.:** 50 rpm

**Lifetime:** 50,000 cycles (1 cycle = 360° left-hand, 360° right-hand). Even after this time, the dampers still produce over approx. 80 % of their original damping moment. The service life may be significantly higher or lower, depending on the application.

**Operating temperature range:** 14 °F to 140 °F

**Material:** Outer body: Steel ; Output shaft sleeve: nylon with metal freewheel

**Mounting:** In any position

#### Information to the shaft:

FDN-47: Ø 0.24 +0 / -0.001

FDN-57 to FDN-70: Ø 0.39 +0 / -0.001

Hardness > HRC55, surface smoothness  $R_z < 1 \mu\text{m}$


**Mounting information:** Turn the shaft in the opposite direction to the brake direction to avoid damaging the freewheel mount. No axial or radial forces may be induced via the shaft.

**Safety information:** Do not use rotary dampers as supports. Provide an external guide or support.



**On request:** Special designs available on request.

### Characteristics

#### At 73 °F ambient temperature

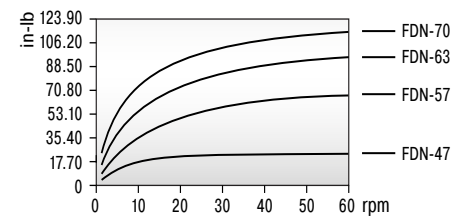

#### At 20 rpm rotational speed

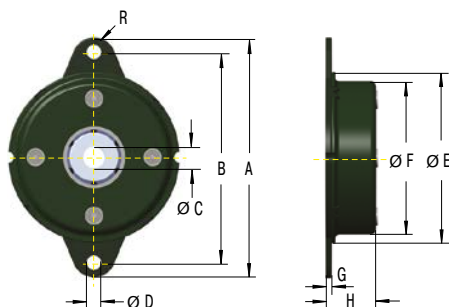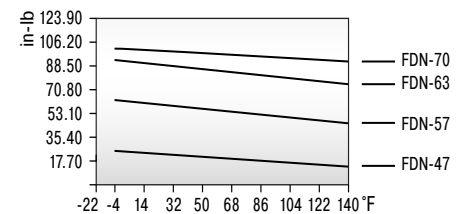

### Performance and Dimensions

TYPES	<sup>1</sup> Damping torque		Damping direction	A	B	C	D	E	F	G	H	R	Weight
	in-lbs												
FDN-47-R	17.70 +/- 2.66		right	2.56	2.20	0.24	0.18	1.85	1.68	0.06	0.40	0.18	0.119
FDN-57-R	48.68 +/- 2.66		right	3.11	2.70	0.40	0.22	2.24	2.06	0.06	0.55	0.22	0.209
FDN-63-R	75.23 +/- 7.08		right	3.50	3.00	0.40	0.25	2.48	2.30	0.06	0.55	0.26	0.254
FDN-70-R	97.36 +/- 8.85		right	3.74	3.23	0.40	0.25	2.76	2.57	0.06	0.51	0.26	0.298
FDN-47-L	17.70 +/- 2.66		left	2.56	2.20	0.24	0.18	1.85	1.68	0.06	0.41	0.18	0.119
FDN-57-L	48.68 +/- 2.66		left	3.11	2.70	0.40	0.22	2.24	2.06	0.06	0.55	0.22	0.209
FDN-63-L	75.23 +/- 7.08		left	3.50	3.00	0.40	0.25	2.48	2.30	0.06	0.55	0.26	0.254
FDN-70-L	97.36 +/- 8.85		left	3.74	3.23	0.40	0.25	2.76	2.57	0.06	0.51	0.26	0.298

<sup>1</sup> The indicated damping torque refers to a rotational speed of 20 rpm and an ambient temperature of 73 °F.

# FYN-P1

Small diameter, large damping torques

## Partial Rotation Angle

Damping torque 8.85 in-lbs to 15.93 in-lbs



The damping direction of the rotary damper FYN-P1 can be either right or left rotation. The dampers can be directly mounted in the pivot point. During each reverse movement of the unilateral decelerating versions there is a certain return damping torque that depends on the size. Differentiation of the damping direction through the coloured shaft. ACE rotary dampers are maintenance-free and ready-to-install.

Rotary damper products are built to metric specifications. For precise measurements, please refer to the ACE rotary damper catalog or contact an application expert.

## Technical Data

**Construction size:** Ø 0.73 in-lbs

**Lifetime:** 50,000 cycles, even after this time, the dampers still produce over approx. 80 % of their original damping moment. The service life may be significantly higher or lower, depending on the application.

**Operating temperature range:** 23 °F to 122 °F

**Material:** Outer body, Shaft: Plastic

**Mounting:** In any position


**Rotation angle max.:** 115°

**Note:** Damping direction: Right hand damping = damping action in clockwise direction (when looking onto the output shaft or output shaft sleeve, depending on the damper type). A play of approx. 5° can occur at the beginning of movement.

**Mounting information:** No axial or radial forces may be induced via the shaft.

**Safety information:** Do not use rotary dampers as supports. Provide an external guide or support.

**On request:** Special designs available on request.

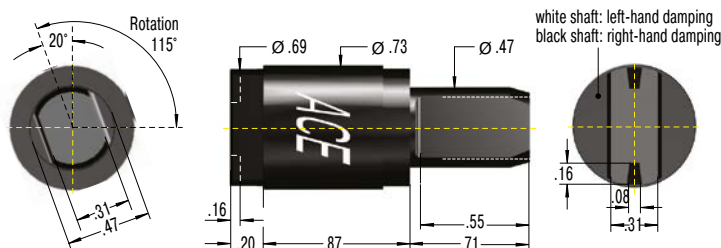

## Performance

TYPES	Damping torque in-lbs	Return Damping Torque in-lbs	Damping direction	Weight lbs
FYN-P1-R103	8.85	2.65	right	0.023
FYN-P1-R153	13.27	4.42	right	0.023
FYN-P1-R183	15.93	7.08	right	0.023
FYN-P1-L103	8.85	2.65	left	0.023
FYN-P1-L153	13.27	4.42	left	0.023
FYN-P1-L183	15.93	7.08	left	0.023

Issue 04.2018 – Specifications subject to change

## FYN-N1

Small diameter, large damping torques

### Partial Rotation Angle

Damping torque 8.85 in-lbs to 26.55 in-lbs

The damping direction of the rotary damper FYN-N1 can be either right or left rotation. The dampers can be directly mounted in the pivot point. During each reverse movement of the unilateral decelerating versions there is a certain return damping torque that depends on the size. Differentiation of the damping direction through coloured end cap. ACE rotary dampers are maintenance-free and ready-to-install.

Rotary damper products are built to metric specifications. For precise measurements, please refer to the ACE rotary damper catalog or contact an application expert.



### Technical Data

**Construction size:** Ø 0.79 in

**Lifetime:** 50,000 cycles, even after this time, the dampers still produce over approx. 80 % of their original damping moment. The service life may be significantly higher or lower, depending on the application.

**Operating temperature range:** 23 °F to 122 °F

**Material:** Outer body, Shaft: Plastic

**Mounting:** In any position


**Rotation angle max.:** 110°

**Note:** Damping direction: Right hand damping = damping action in clockwise direction (when looking onto the output shaft or output shaft sleeve, depending on the damper type). A play of approx. 5° can occur at the beginning of movement.

**Mounting information:** No axial or radial forces may be induced via the shaft.

**Safety information:** Do not use rotary dampers as supports. Provide an external guide or support.

**On request:** Special designs available on request.

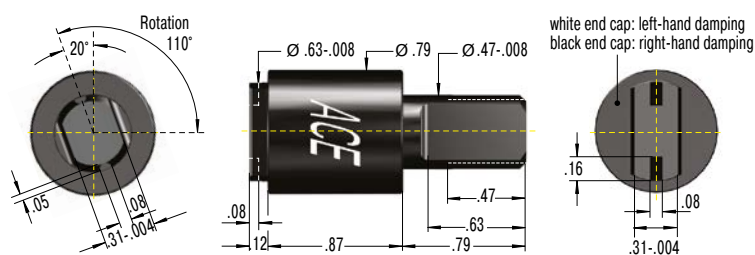

### Performance

TYPES	Damping torque in-lbs	Return Damping Torque in-lbs	Damping direction	Weight lbs
FYN-N1-R103	8.85	1.77	right	0.026
FYN-N1-R203	17.70	3.54	right	0.026
FYN-N1-R253	22.13	3.54	right	0.026
FYN-N1-R303	26.55	7.08	right	0.026
FYN-N1-L103	8.85	1.77	left	0.026
FYN-N1-L203	17.70	3.54	left	0.026
FYN-N1-L253	22.13	3.54	left	0.026
FYN-N1-L303	26.55	7.08	left	0.026

## FYN-U1

Small, strong and very robust

### Partial Rotation Angle

Damping torque 17.70 in-lbs to 26.55 in-lbs

The damping direction of the rotary damper FYN-U1 can be either right or left rotation. The dampers can be directly mounted in the pivot point. The body is made of especially robust die-cast zinc. During each reverse movement of the unilateral decelerating versions there is a certain return damping torque that depends on the size. ACE rotary dampers are maintenance-free and ready-to-install.

Rotary damper products are built to metric specifications. For precise measurements, please refer to the ACE rotary damper catalog or contact an application expert.



### Technical Data

**Construction size:** Ø 0.63 in

**Lifetime:** 50,000 cycles, even after this time, the dampers still produce over approx. 80 % of their original damping moment. The service life may be significantly higher or lower, depending on the application.

**Operating temperature range:** 23 °F to 122 °F

**Material:** Outer body, Shaft: Zinc die-cast

**Mounting:** In any position


**Rotation angle max.:** 115°

**Note:** Damping direction: Right hand damping = damping action in clockwise direction (when looking onto the output shaft or output shaft sleeve, depending on the damper type). A play of approx. 5° can occur at the beginning of movement.

**Mounting information:** No axial or radial forces may be induced via the shaft.

**Safety information:** Do not use rotary dampers as supports. Provide an external guide or support.

**On request:** Special designs available on request.

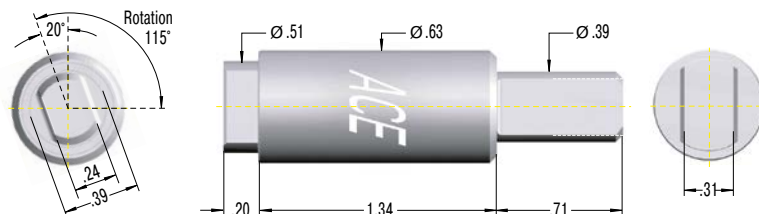

### Performance

TYPES	Damping torque in-lbs	Return Damping Torque in-lbs	Damping direction	Weight lbs
FYN-U1-R203	17.70	3.54	right	0.088
FYN-U1-R253	22.13	3.54	right	0.088
FYN-U1-R303	26.55	7.08	right	0.088
FYN-U1-L203	17.70	3.54	left	0.088
FYN-U1-L253	22.13	3.54	left	0.088
FYN-U1-L303	26.55	7.08	left	0.088



## FYN-S1

The flat damper for constant component protection

### Partial Rotation Angle

Damping torque 44.25 in-lbs to 88.51 in-lbs

The self-compensating FYN-S1 rotary damper with zinc die-cast body provides a constant sequence of movement for different masses. The damping direction can be either right or left rotation. During each reverse movement of the unilateral decelerating versions there is a certain return damping torque that depends on the size. ACE rotary dampers are maintenance-free and ready-to-install.

Rotary damper products are built to metric specifications. For precise measurements, please refer to the ACE rotary damper catalog or contact an application expert.



### Technical Data

**Construction size:** Ø 2.36 in

**Lifetime:** 50,000 cycles, even after this time, the dampers still produce over approx. 80 % of their original damping moment. The service life may be significantly higher or lower, depending on the application.

**Operating temperature range:** 23 °F to 122 °F

**Material:** Outer body: Zinc die-cast ; Output shaft sleeve: Plastic

**Mounting:** In any position


**Rotation angle max.:** 130°

**Note:** Damping direction: Right hand damping = damping action in clockwise direction (when looking onto the output shaft or output shaft sleeve, depending on the damper type). A play of approx. 5° can occur at the beginning of movement.

**Mounting information:** No axial or radial forces may be induced via the shaft.

**Safety information:** Do not use rotary dampers as supports. Provide an external guide or support.

**On request:** Special designs available on request.

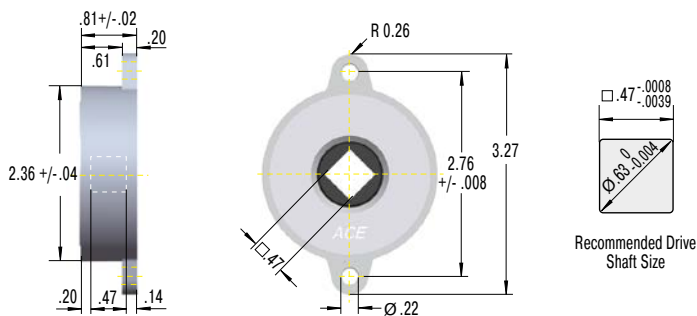

### Performance

TYPES	Damping torque in-lbs	Return Damping Torque in-lbs	Damping direction	Weight lbs
FYN-S1-R104	44.25 - 88.51	13.28	right	0.485
FYN-S1-L104	44.25 - 88.51	13.28	left	0.485

## FYT-H1 and FYN-H1

Specifically adjustable, strong braking force

**Partial Rotation Angle, Adjustable**

**Damping torque 77.70 in-lbs to 88.51 in-lbs**

The damping direction of the adjustable FYT-H1 and FYN-H1 can be right, left or two-sided rotation. During each reverse movement of the unilateral decelerating versions there is a certain return damping torque that depends on the size. The brakes have a particularly robust zinc die-cast body and shafts made of steel. ACE rotary dampers are maintenance-free and ready-to-install.

Rotary damper products are built to metric specifications. For precise measurements, please refer to the ACE rotary damper catalog or contact an application expert.



### Technical Data

**Construction size:** Ø 1.75 in

**Lifetime:** 50,000 cycles, even after this time, the dampers still produce over approx. 80 % of their original damping moment. The service life may be significantly higher or lower, depending on the application.

**Operating temperature range:** 23 °F to 122 °F

**Material:** Outer body: Zinc die-cast ; Shaft: Steel

**Mounting:** In any position


**Rotation angle max.:** 105°

**Maximum side load:** 11.24 lb

**Note:** Damping direction: Right hand damping = damping action in clockwise direction (when looking onto the output shaft or output shaft sleeve, depending on the damper type). A play of approx. 5° can occur at the beginning of movement.

**Safety information:** Do not use rotary dampers as supports. Provide an external guide or support.

**On request:** Special designs available on request.

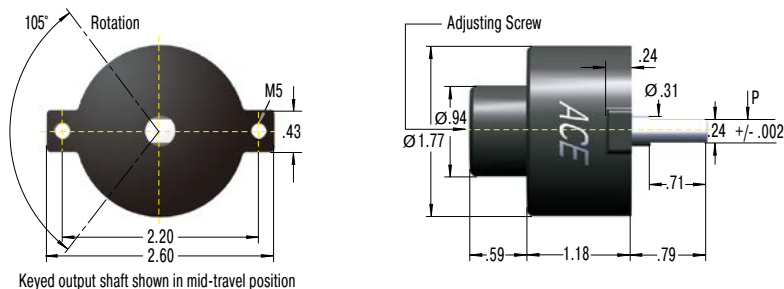

### Performance

TYPES	Damping torque in-lbs	Return Damping Torque in-lbs	Damping direction	Weight lbs
FYT-H1	17.70 - 88.51	4.43	bidirectional	0.516
FYN-H1-R	17.70 - 88.51	4.43	right	0.516
FYN-H1-L	17.70 - 88.51	4.43	left	0.516

## FYT-LA3 and FYN-LA3

Adjustable high performance

**Partial Rotation Angle, Adjustable**

**Damping torque 35.40 in-lbs to 354.04 in-lbs**

The damping direction of this adjustable high-performance rotary damper can be right, left or two-sided rotation. During each reverse movement of the unilateral decelerating versions there is a certain return damping torque that depends on the size. The brakes have a particularly robust zinc die-cast body and shafts made of steel. ACE rotary dampers are maintenance-free and ready-to-install.

Rotary damper products are built to metric specifications. For precise measurements, please refer to the ACE rotary damper catalog or contact an application expert.



### Technical Data

**Construction size:** Ø 3.15 in

**Lifetime:** 50,000 cycles, even after this time, the dampers still produce over approx. 80 % of their original damping moment. The service life may be significantly higher or lower, depending on the application.

**Operating temperature range:** 23 °F to 122 °F

**Material:** Outer body: Zinc die-cast ; Shaft: Steel

**Mounting:** In any position



**Rotation angle max.:** 210°

**Maximum side load:** 45 lb

**Note:** Damping direction: Right hand damping = damping action in clockwise direction (when looking onto the output shaft or output shaft sleeve, depending on the damper type). A play of approx. 5° can occur at the beginning of movement.

**Safety information:** Do not use rotary dampers as supports. Provide an external guide or support.

**On request:** Special designs available on request.




### Performance

TYPES	Damping torque in-lbs	Return Damping Torque in-lbs	Damping direction	Weight lbs
FYT-LA3	35.40 - 354.04	35.40	bidirectional	3.793
FYN-LA3-R	35.40 - 354.04	35.40	right	3.809
FYN-LA3-L	35.40 - 354.04	35.40	left	3.809

## Calculation Example

### Damping of a Lid

To select an appropriate rotary damper for the adjacent calculation example, the length and the weight or the center of gravity of the flap have to be known. After determining the value of the max. torque at an unfavorable angle of the flap, select the appropriate damper.

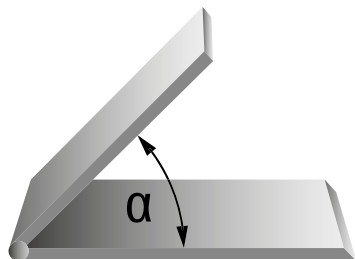

### Calculation Steps

1. Calculate max. torque damper will be exposed to (with example shown on the left max. torque is at  $\alpha = 0^\circ$ ).
2. Decide upon rotation speed desired.
3. Choose a rotary damper that can handle the torque calculated above.
4. With the aid of the damper performance curves, check if the r.p.m. given at your torque corresponds to the desired closing speed of the lid.
5. If the r.p.m. is too high – choose a damper with a higher torque rating.  
If the r.p.m. is too low – choose a damper with a lower torque rating.

Closing Torque  
 $T = L / 2 \cdot M \cdot g \cdot \cos \alpha$   
 (L / 2 = center of gravity)


**M** Mass of a lid [lb]  
**L** Length of lid from pivot [in]  
**n** Rotation speed [r.p.m.]

## Special Accessories


### Toothed Racks for Rotary Dampers with Gear

Rotary dampers with gears are available in four standard modules which can be optionally supplied with plastic toothed racks as accessories.

#### M0.5, M0.6, M0.8, M1.0 Toothed Rack



#### M0.8P Toothed Rack



### Delivery Notes

**Delivery form:** Toothed plastic racks with modules 0.5 to 1.0 availables ex stock

**On request:** Toothed metal racks

### Dimensions


TYPES	A inch	B inch	C inch	Model
M0.5	9.84	0.16	0.18	rigid, milled
M0.6	9.84	0.16	0.24	rigid, milled
M0.8	9.84	0.24	0.31	rigid, milled
M0.8P	6.69	0.31	0.16	flexible, milled
M1.0	9.84	0.35	0.35	rigid, milled
M1.0	19.69	0.39	0.39	rigid, milled

### Damping Direction

right hand damping = damping action in clockwise direction  
 (when looking onto the output shaft)

### Mounting Information

The rotary axis, square receptacles or free-wheel receptacles are not designed for lateral loads. An external guide or bearing support is fundamentally recommended.

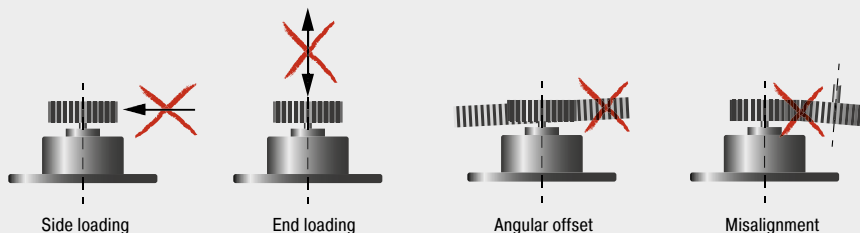


## Application Examples

### FDT

#### Finger protection when cutting bread

To exclude the possibility of injury when using bread slicing machines on self-service counters, the automatic bread slicing process does not start until the flap of the modern machine is closed. To simplify the operation and to thereby increase acceptance of the self-slicing principle among users, two-way rotary dampers of the type FDT-57 ensure smooth opening and closing of the door. Even when rotary dampers must act only in one direction, ACE has appropriate variants readily available.

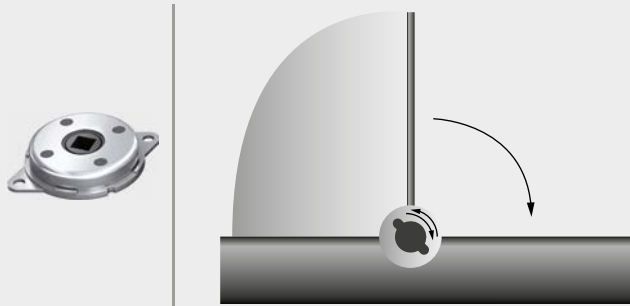

Protective flaps secured with rotary dampers: the simple operation of bread slicing machines can then be easily managed by hand  
Daub Bakery Machinery BV, 5050 AB Goirle, Netherlands

### FDN-R

#### Invisible protection for cooker hoods

For ergonomic handling, modern cooker hoods can be driven by a motor into an up position and then down again. When driven downwards, an AC load can result in a total loss through current being fed back into the voltage source. One of the tasks of the FDN-63-R ACE rotary damper is to prevent this. The modern machine elements are also built to provide protection against motor failure. Sliding the hood down too quickly could lead to further costly damage to the hood and the ceiling console and even cause personal injury.



Rotary dampers in high-end cooker hoods safeguard the protection of drive units and protect chefs, even during power failures  
berbel Ablufttechnik GmbH, 48432 Rheine, Germany

# Vibration Control

Vibration-Isolating Pads, Rubber-Metal Isolators  
Low Frequency Pneumatic Leveling Mounts



# Isolate Unwanted Vibrations Effectively

## Unique variety

**This ACE product group includes innovative solutions to provide customers with the best assistance in isolation technology and vibration isolation. These machine elements are also distinguished by their light design and wide variety.**

The product range extends from extremely low frequency isolating pneumatic leveling mounts to ready-to-install rubber-metal isolators and damping pads. With this portfolio, ACE is capable of offering you customized vibration isolation for almost any application.



## Vibration Isolation

**Noise reduction and vibration isolation are becoming more and more important in our daily lives. This applies in particular to the workplace and the environments around production companies.**

Preventing noise emissions or harmful vibrations is not only a necessity required by noise protection and occupational health and safety legislation; their sources must also be localized by means of targeted analysis in order to develop suitable improvement measures for achieving increased production quality. A second by-product of vibrations are their effects on the surrounding production environment and any measuring and testing facilities that may be in use.

### Advantages

- improved working conditions for people and the environment
- more accurate production tolerances and increased product quality
- competitive and cost advantages thanks to lower reject rate in production
- increased production speed thanks to increased maximum machine dynamics
- longer tool and machine life thanks to lower stress
- faster and more accurate measuring results

*For detailed information, see our ACEolator catalog*





# Rubber-Metal Isolators

## Ready-to-install isolators for quick selection

Rubber-metal isolators and machine feet are supplied ready-to-install and are used in a large variety of vibration isolation applications. Common applications are engines, compressors, transfer systems, machines, fans and blowers.



### LEV

#### Leveling Mounts (height-adjustable machine feet)

Secure, adjustable stabilization for all types of machines, transfer systems, assembly stations, etc.



### CM

#### Cup Mounts (cup elements)

For isolating machinery and equipment. Fail-safe isolators for all axes in any installation position. Application examples: compressors, off-road vehicles, engines, fans, etc.



### COM

#### Compression Mounts (pre-tensioned high-performance bearing surface)

Vertically acting isolators for machinery and equipment. Applications include: blowers, compressors, motors, generators, presses, etc.



### AAM

#### All Attitude Mounts (vibration-isolating fasteners)

Maintenance free isolators for decoupling parts and components in electronics, aerospace, the military, medicine, transfer systems, etc.



### SFM

#### Stable Flex Mounts (stable machine feet)

Extremely rugged and maintenance-free isolators, e.g. for marine applications, for diesel generators, in power generation or in off-road vehicles.



### BM

#### Bubble Mounts (low-frequency vibration isolators)

For protecting small devices and electronic components, e.g. in medical technology, aerospace, electronic systems or computers.



### UMO

#### Universal Mounts (universal connection isolators)

Maintenance-free connection isolators which can be implemented both radially and axially. Application examples: conveying systems, machinery and equipment, off-road, oil and gas industry, control systems, etc.



### FL

#### Flex Locs (quick fastening elements)

Simple, efficient components with versatile applications as isolating fasteners for decoupling structure-borne sound in enclosures, housings, equipment and machinery. For application in mechanical engineering, in buildings, vehicles, or navigation.

# Vibration-Isolating Pads

## Customized insulation technology through cutting and combining

A wide range of applications such as machine foundations, supports, decoupling elements, pipelines and subsequently protected machines require tailor-made solutions. Here with its product range of vibration insulating pads ACE offers comprehensive possibilities for insulation. The products are manufactured and supplied either as standard pads or as drawing parts according to customer request.



### SLAB

#### Universal Damping Pads

For application on foundations for plants and machines, compressors, in pump stations, generators, for insulations, measuring tables, buildings, etc.



### CEL

#### Low-Frequency Damping Pads

For use in foundations, buildings, transport routes, bridges, stairs, test benches, pump stations, generators, compressors, machines, etc.



### PAD

#### Rugged Fiber and Elastomer Pads

For isolating and protecting foundations, such as presses, plants, machines, as well as for use in pump stations, crane runways, bridges and heavy-duty applications

## Application overview

Type	Machines	Transfer systems	Construction Transport	Blower Fan	Foundations	Control units Electrical systems	Off-road vehicles
<b>Rubber-Metal Isolators</b>							
LEV	■	■		■			
CM	■		■	■			■
COM	■	■		■		■	
AAM		■	■			■	■
SFM			■				■
BM				■		■	
UMO	■	■	■			■	■
FL	■		■			■	
<b>Vibration-Isolating Pads</b>							
SLAB	■	■	■	■	■		
CEL	■	■	■	■	■		
PAD	■		■		■		■
<b>Air Spring Elements</b>							
PLM	■						
PAL					■		

Issue 04.2018 – Specifications subject to change

# Low Frequency Pneumatic Leveling Mounts

**Highly efficient insulation – it can hardly get any better**

Everywhere perfect isolation of measuring tables, test equipment and high-performance machines are important the low frequency pneumatic leveling mounts PLM and PAL are a good choice. On request a detailed system analysis will be carried out at the customer and the perfect solution will be developed.



## PLM

### Pneumatic Air Spring Elements

For an efficient isolation of measuring equipment, high-speed presses and machines.



## PAL-3 to PAL-9

### Small Size Air Spring Elements

The perfect leveling and isolation system for smaller constructions that require precision and flexibility. Available in the system with many accessories.



## PAL-18 to PAL-1000

### Big Air Spring Elements with Automatic Level Controls

Isolation against disruptive vibrations and level-adjustment for test and measuring equipment. Isolating at extremely low-frequencies, these components are used in the automotive industry and in aerospace engineering.

More information about vibration control can be found in our special catalog and on our website [www.acecontrols.com / Downloads](http://www.acecontrols.com/Downloads)

Issue 04.2018 – Specifications subject to change

Engines Generators	Compressors	Oil and gas industry	Aerospace engineering	Presses	Medicine	Measuring tables	Test benches	Type
<b>Rubber-Metal Isolators</b>								
				■				LEV
■	■	■	■					CM
■	■			■				COM
■			■		■			AAM
■	■							SFM
					■			BM
■	■	■	■					UMO
■	■							FL
<b>Vibration-Isolating Pads</b>								
		■		■	■	■		SLAB
		■		■	■	■	■	CEL
		■		■				PAD
<b>Air Spring Elements</b>								
				■	■	■	■	PLM
			■			■	■	PAL

# Safety Products

**Safety Shock Absorbers, Safety Dampers  
Clamping Elements**



## Protection for all machine designs under any condition

For any budget and all requirements

**This ACE product group provides Emergency braking to safely slow down moving loads and reduce damaging forces. Although the safety shock absorbers, TUBUS elastomer bumpers and clamping elements differ so much in design, every single ACE component provides the best protection for your machine.**

They demonstrate their main advantages in emergency stop situations and, based on the protection they provide, are very cost-effective. Furthermore, they can all be easily integrated into existing design and largely work independent of energy supplies.



## Safety Shock Absorbers

### Perfect protection for the worst case scenario

**As an alternative to the standard shock absorber, Safety shock absorbers are the tried and tested low cost method of preventing those occasional emergency stops. Designed for occasional use, they primarily serve as reliable, effective protection in emergency stop situations.**

The maintenance-free and ready-to-install machine elements are characterized in every respect by the well-known high ACE quality and maximum energy absorption of up to 4,250,000 in-lbs/Cycle. This means, in the product family SCS33 up to SCS64 a service life of up to 1,000 full load emergency cycles is achieved.

Safety shock absorbers from ACE are available in a large choice with strokes of 0.91 in to 47.24 in, and the arrangement of orifice pattern can be calculated and produced specifically to the customer's requirements and depending on the application.



## Safety Shock Absorbers



### SCS33 to SCS64

Page 262

Self-Compensating or Optimized Characteristic  
**Industry design with high energy absorption**

Finishing and processing centers, Conveyor systems, Portal systems, Test stations



### SCS38 to SCS63

Page 266

High Rack Damper, Optimized Characteristic  
**Low reaction forces with long strokes**

Shelf storage systems, Heavy load applications, Conveyor systems, Conveyor systems



### CB63 to CB160

Page 270

Crane Installations, Optimized Characteristic

**High resetting forces with gas pressure accumulator**

Heavy load applications, Heavy load applications, Conveyor systems, Portal systems



### EB63 to EB160

Page 272

Crane Installations, Optimized Characteristic

**Low return force with spring assembly**

Heavy load applications, Heavy load applications, Conveyor systems, Portal systems

Top machine protection

Latest damping technology

Attractive cost-benefit ratio

Maximum strokes

Wide application spectrum

Robust design



## SCS33 to SCS64


Industry design with high energy absorption

**Self-Compensating or Optimized Characteristic**  
**Energy capacity 2,744 in-lbs/Cycle to 159,313 in-lbs/Cycle**  
**Stroke 0.91 in to 5.91 in**

Effective emergency stop: the ACE safety shock absorbers from the SCS33 to SCS64 product family are based on the innovative technology of the successful MAGNUM range shock absorbers. They are also maintenance-free and ready-to-install.

ACE uses our proprietary custom calculation program to design each shock absorber for the specific customer application. Customization helps reduce the risk of crashes and incorrect product sizing. Due to the optimized characteristic curve for the respective application, the energy absorption of these hydraulic machine elements can be increased to more than twice the level of the MAGNUM model of ACE industrial shock absorber per stroke. Users benefit from a service life of up to 1,000 full load emergency cycles with a very good price-performance ratio. Their compact design in sizes M33x1.5 to M64x2 makes them easy to integrate into current applications.

These slimline, high-performance safety shock absorbers are only designed for emergency stop situations. They can be used for a number of tasks in gantries and conveyor systems, processing centres or assembly machines.

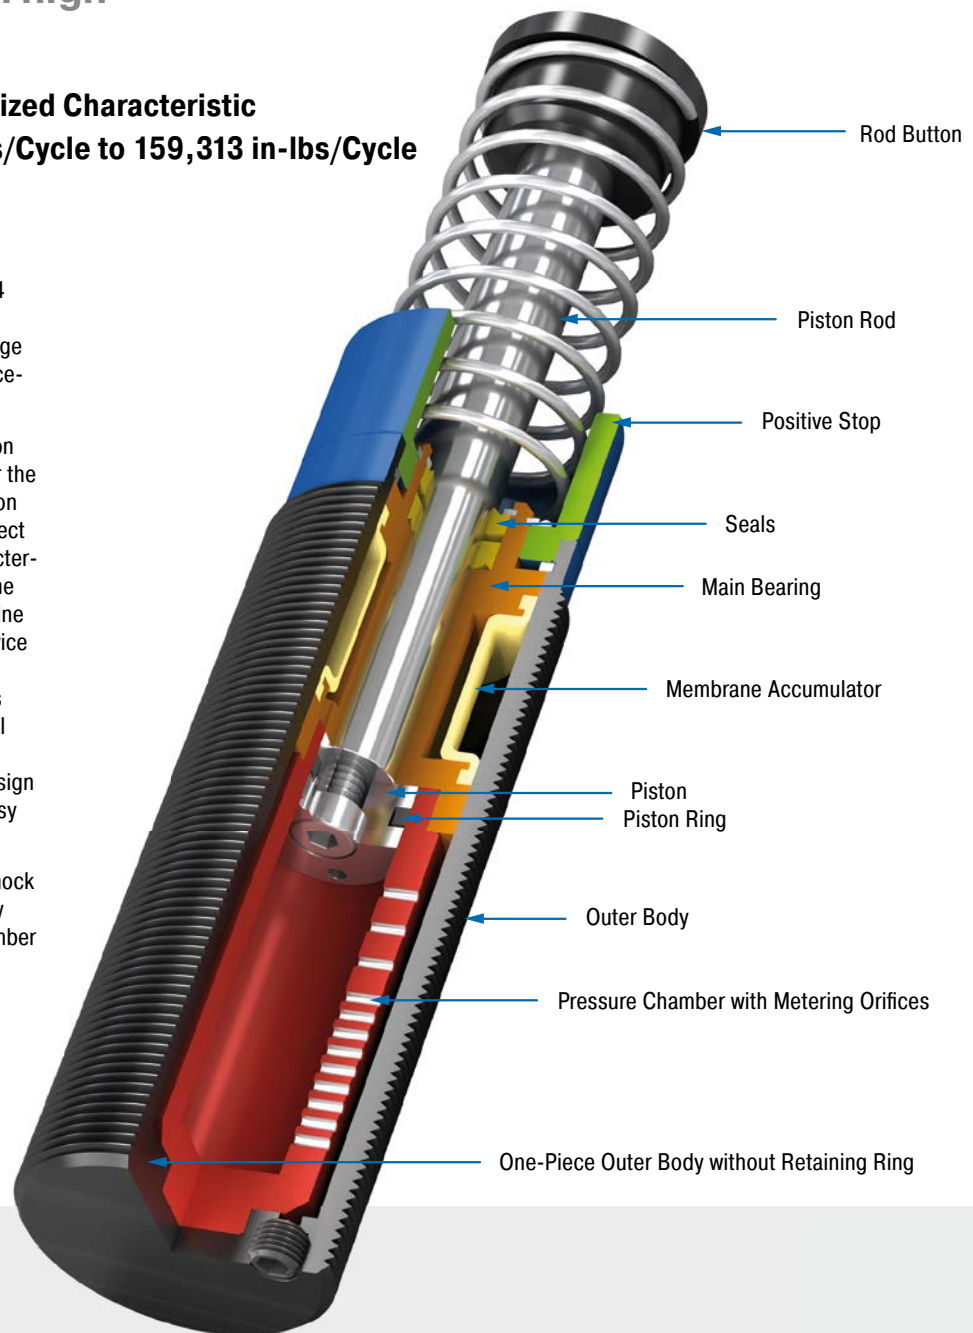

### Technical Data

**Energy capacity:** 2,744 in-lbs/Cycle to 159,313 in-lbs/Cycle

**Impact velocity range:** 0.06 ft/sec to 16 ft/sec. Other speeds on request.

**Operating temperature range:** 10 °F to 158 °F. Other temperatures on request.

**Mounting:** In any position

**Positive stop:** Integrated

**Material:** Outer body: Nitride hardened steel ; Piston rod: Hard chrome plated steel ; Rod end button: Hardened steel and corrosion-resistant coating; Return spring: Zinc plated or plastic-coated steel ; Accessories: Steel corrosion-resistant coating

**Damping medium:** Automatic Transmission Fluid (ATF)


**Application field:** Finishing and processing centers, Conveyor systems, Portal systems, Test stations, Machines and plants, Swivel units, Cranes

**Note:** The shock absorber can be pushed through its stroke. In creep speed conditions the shock absorber provides minimal resistance and there is no braking effect.

**On request:** Special oils, special flanges etc.




### SCS33

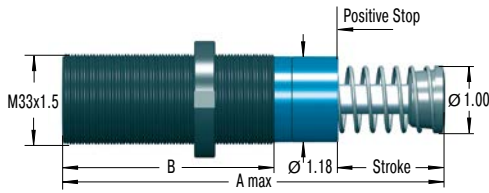


The calculation and selection of the most suitable damper should be carried out or be approved by ACE.

### Accessories


**250-0292**  
Locking Ring



**250-0293**  
Rectangular Flange



**250-0294**  
Side-Foot Mount Assembly

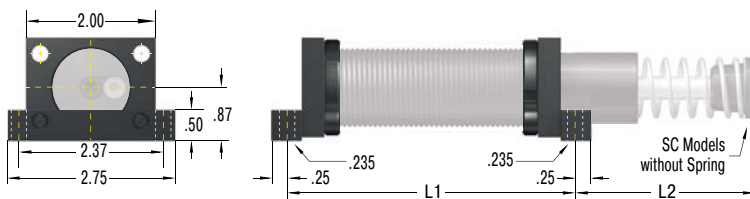

Dimensions		
TYPES	L1 inch	L2 inch
MC, MA, ML3325	3.75	1.94
MC, MA, ML3350	4.75	2.94
SC3325	5.31	1.94
SC3350	7.31	2.94
SCS33-25	3.75	1.94
SCS33-50	4.75	2.94

250-0294 = 1 locknut, 2 flanges, 2 bars, 4 screws M6x40, DIN 912  
Torque max.: 97 in-lbs  
Clamping torque: 797 in-lbs  
Bolts to mount assembled shock & mount not included.

### Complete details required when ordering

- Moving load: W (lbs)
- Impact velocity range: v (ft/s) max.
- Creep speed: vs (ft/s)
- Motor power: HP (horsepower)
- Stall torque factor: ST (normal, 2.5)
- (Alternatively: Propelling force F (lbs))
- Number of absorbers in parallel: n

or technical data according to formulae and calculations on page 275.

### Ordering Example

**SCS33-50-1xxxx**  
Safety Shock Absorber \_\_\_\_\_  
Thread Size M33 \_\_\_\_\_  
Max. Stroke without Positive Stop 1.97" (50 mm) \_\_\_\_\_  
Identification No. assigned by ACE \_\_\_\_\_

**Please indicate identification no. in case of replacement order**

Please contact the factory for complete part number.


### Performance and Dimensions

TYPES	Max. Energy Capacity		Return Force min. lbs	Return Force max. lbs	Stroke inch	A max. inch	B inch	Side Load Angle max. °	Weight lbs
	E <sub>3</sub> Self-compensating in-lbs/cycle	E <sub>3</sub> Optimised in-lbs/cycle							
SCS33-25	2,744	4,425	10.1	20.2	0.91	5.44	3.27	3	1.12
SCS33-50	5,487	8,408	10.1	30.3	1.91	7.44	4.25	2	1.39

<sup>1</sup> The values are reduced by 20 % at max. side load angle.

Self-Compensating or Optimized Characteristic


**SCS45**

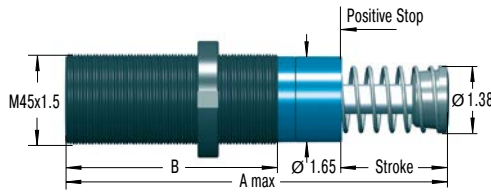


The calculation and selection of the most suitable damper should be carried out or be approved by ACE.

**Accessories**


**250-0297**  
Locking Ring




**250-0298**  
Square Flange



**250-0299**  
Rectangular Flange



**250-0300**  
Side-Foot Mount Assembly

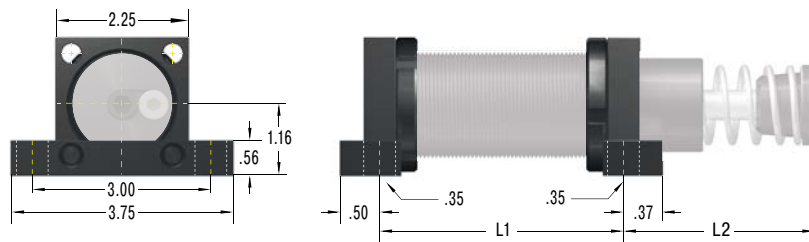

Dimensions		
TYPES	L1 inch	L2 inch
MC, MA, ML4525	3.50	1.94
MC, MA, ML4550	4.38	3.06
MC, MA4575	5.38	4.06
SC4525	5.10	2.09
SC4550	7.10	3.09
SCS45-25	3.50	1.94
SCS45-50	4.38	3.06
SCS45-75	5.38	4.06


250-0300 = 1 locknut, 2 flanges, 2 bars, 4 screws M8x50, DIN 912  
 Torque max.: 239 in-lbs  
 Clamping torque: 3,098 in-lbs  
 Bolts to mount assembled shock & mount not included.

**Complete details required when ordering**

- Moving load: W (lbs)
- Impact velocity range: v (ft/s) max.
- Creep speed: vs (ft/s)
- Motor power: HP (horsepower)
- Stall torque factor: ST (normal, 2.5)
- (Alternatively: Propelling force F (lbs))
- Number of absorbers in parallel: n

or technical data according to formulae and calculations on page 275.

**Ordering Example**

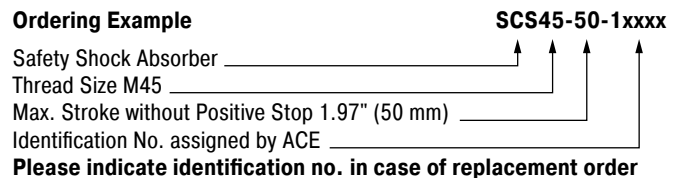


Please indicate identification no. in case of replacement order  
 Please contact the factory for complete part number.

**Performance and Dimensions**

TYPES	Max. Energy Capacity		Return Force min. lbs	Return Force max. lbs	Stroke inch	A max. inch	B inch	Side Load Angle max. °	Weight lbs
	E <sub>3</sub> Self-compensating in-lbs/cycle	E <sub>3</sub> Optimised in-lbs/cycle							
SCS45-25	6,019	10,621	15.7	22.5	0.91	5.71	3.74	3	2.51
SCS45-50	12,037	20,799	15.7	32.6	1.91	7.68	4.72	2	3.00
SCS45-75	18,056	30,978	11.2	40.5	2.91	9.69	5.71	1	3.51

<sup>1</sup> The values are reduced by 20 % at max. side load angle.


### SCS64

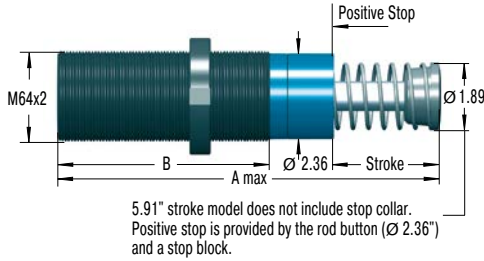


The calculation and selection of the most suitable damper should be carried out or be approved by ACE.

### Accessories


#### 250-0301 Locking Ring



#### 250-0302 Square Flange



#### 250-0304 Side-Foot Mount Assembly

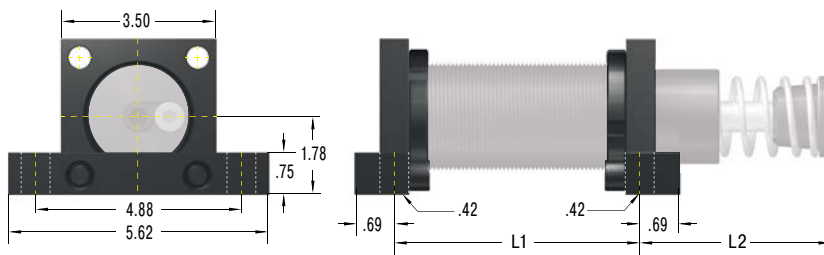

Dimensions		
TYPES	L1 inch	L2 inch
ML6425	4.00	2.54
MC, MA, ML6450	5.00	3.54
MC, MA64100	7.00	5.54
MC, MA64150	9.00	8.42
SCS64-50	5.00	3.54
SCS64-100	7.00	5.54
SCS64-150	9.00	8.42


250-0304 = 1 locknut, 2 flanges, 2 bars, 4 screws M10x80, DIN 912  
 Torque max.: 443 in-lbs  
 Clamping torque: 3,098 in-lbs  
 Bolts to mount assembled shock & mount not included.

### Complete details required when ordering

- Moving load: W (lbs)
- Impact velocity range: v (ft/s) max.
- Creep speed: vs (ft/s)
- Motor power: HP (horsepower)
- Stall torque factor: ST (normal, 2.5)
- (Alternatively: Propelling force F (lbs))
- Number of absorbers in parallel: n

or technical data according to formulae and calculations on page 275.

### Ordering Example

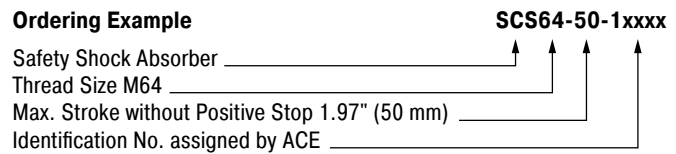

**Please indicate identification no. in case of replacement order**

Please contact the factory for complete part number.

### Performance and Dimensions

TYPES	Max. Energy Capacity		Return Force		Stroke inch	A max. inch	B inch	Side Load Angle max. °	Weight lbs
	E <sub>3</sub> Self-compensating in-lbs/cycle	E <sub>3</sub> Optimised in-lbs/cycle	min. lbs	max. lbs					
SCS64-50	30,093	53,104	20.2	34.8	1.91	8.86	5.51	3	6.39
SCS64-100	60,185	106,209	23.6	60.7	3.91	12.83	7.52	2	8.16
SCS64-150	90,278	159,313	16.9	82.1	5.91	17.72	9.49	1	11.25

<sup>1</sup> The values are reduced by 20 % at max. side load angle.

## SCS38 to SCS63

Low reaction forces with long strokes

### High Rack Damper, Optimized Characteristic


Energy capacity 32,000 in-lbs/Cycle to 1,912,000 in-lbs/Cycle

Stroke 1.97 in to 47.24 in

Slim with a long stroke: safety shock absorbers from the SCS38 to SCS63 product family are designed for emergency-stop applications. Strokes of up to 47.24" (1,200 mm) are possible with these maintenance-free and ready-to-install dampers. Low reaction forces result due to the large strokes.

ACE uses our proprietary custom calculation program to design each shock absorber for the specific customer application. Customization helps reduce the risk of crashes and incorrect product sizing. The characteristic curve or damping characteristics of all safety shock absorbers from ACE are individually designed to the specific customer application. The metering orifices for the applications are specially calculated and produced. These tailor-made machine elements are the ideal protection because they are less expensive than industrial shock absorbers and are effective with up to 1,000 possible full load emergency stops.

Anyone who wants to reliably protect the end positions of rack operating equipment, conveyor and crane systems, heavy duty applications and test benches chooses these safety shock absorbers from ACE.

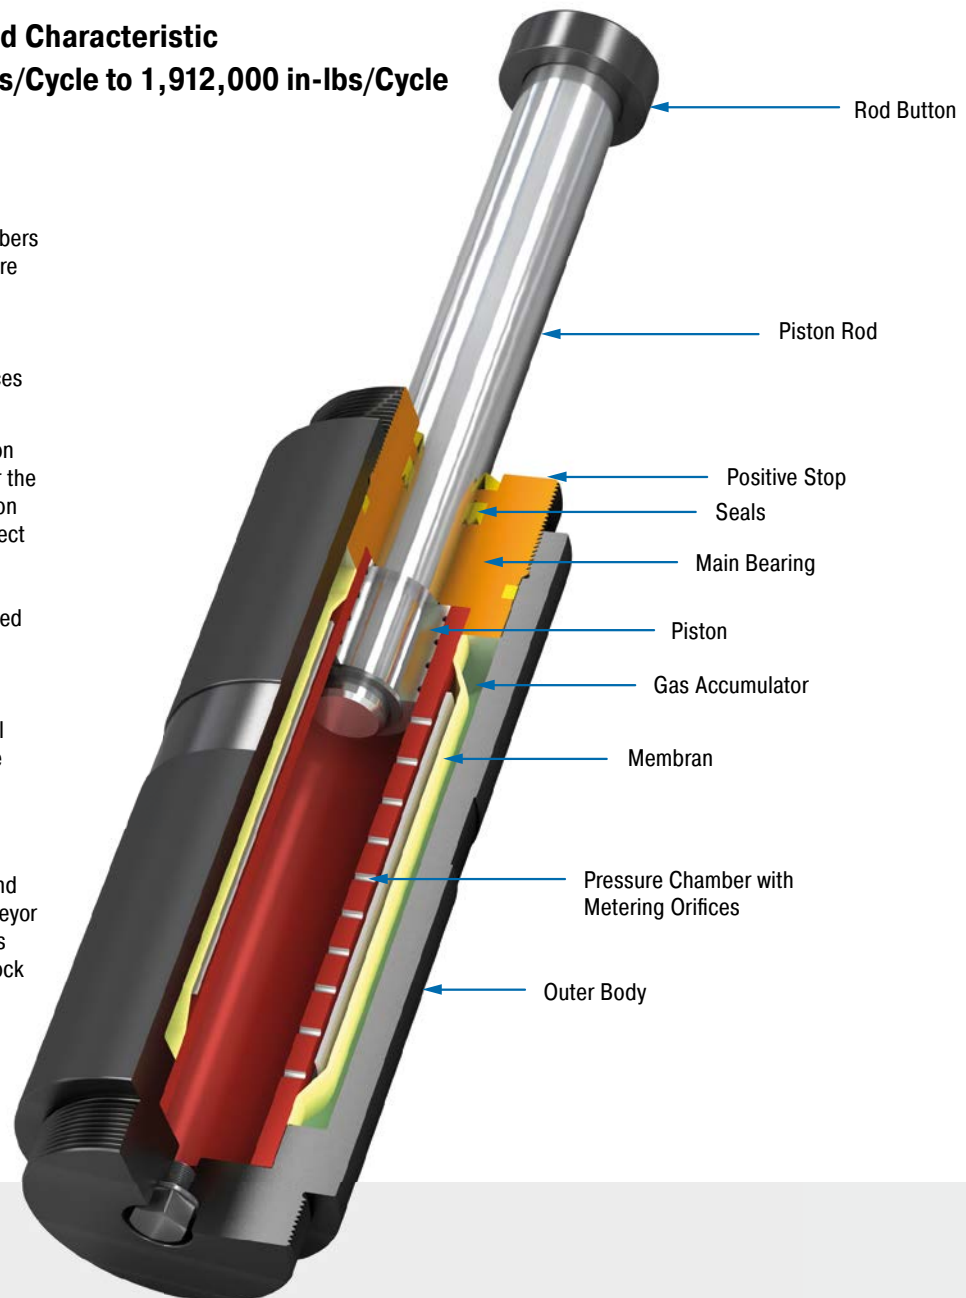

### Technical Data

**Energy capacity:** 32,000 in-lbs/Cycle to 1,912,000 in-lbs/Cycle

**Impact velocity range:** 1.6 ft/sec to 15 ft/sec. Other speeds on request.

**Reacting force:** At max. capacity rating = 18,000 lbs to 47,200 lbs

**Operating temperature range:** 10 °F to 150 °F. Other temperatures on request.

**Mounting:** In any position

**Positive stop:** Integrated

**Material:** Outer body, Rod end button: Steel corrosion-resistant coating; Piston rod: Hard chrome plated steel

**Damping medium:** Automatic Transmission Fluid (ATF)


**Filling pressure:** Approx. 29 psi. Rod return by integrated nitrogen accumulator.

**Application field:** Shelf storage systems, Heavy load applications, Conveyor systems, Conveyor systems, Portal systems, Test stations


**Note:** The shock absorber can be pushed through its stroke. In creep speed conditions the shock absorber provides minimal resistance and there is no braking effect.

**On request:** Special oils, special flanges, additional corrosion protection etc. Integrated rod sensor for indicating the complete extension of the piston rod. Type normally closed or normally open, option PNP or NPN switch.


## SCS38-F Front Flange

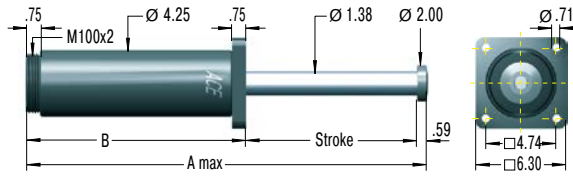

## SCS38-R Rear Flange

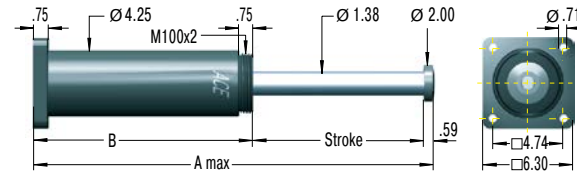

## SCS38-S Foot Mount

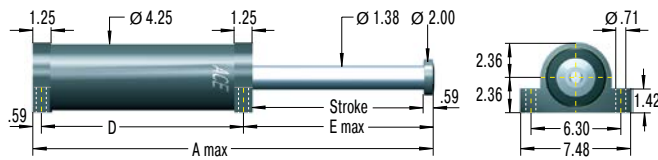

## Technical Data

**Impact velocity range:** 3 ft/sec to 15 ft/sec

### Complete details required when ordering

- Moving load: W (lbs)
- Impact velocity range: v (ft/s) max.
- Creep speed: vs (ft/s)
- Motor power: HP (horsepower)
- Stall torque factor: ST (normal, 2.5)
- (Alternatively: Propelling force F (lbs))
- Number of absorbers in parallel: n

or technical data according to formulae and calculations on page 275.

The calculation and selection of the most suitable damper should be carried out or be approved by ACE.

### Ordering Example

**SCS38-400-F-X**  
 Safety Shock Absorber \_\_\_\_\_  
 Bore Size  $\varnothing$  1.50" (38 mm) \_\_\_\_\_  
 Stroke 15.75" (400 mm) \_\_\_\_\_  
 Mounting Style: Front Flange \_\_\_\_\_  
 Identification No. assigned by ACE \_\_\_\_\_  
**Please indicate identification no. in case of replacement order**

Please contact the factory for complete part number.


## Performance and Dimensions

TYPES	Energy capacity in-lbs/cycle	Return Force		Stroke inch	A max. inch	B inch	D inch	E max. inch	Mounting Style		Mounting Style	
		min. lbs	max. lbs						<sup>1</sup> F and S Side Load Angle max. °	<sup>1</sup> R Side Load Angle max. °	F and R Weight lbs	S Weight lbs
SCS38-50	32,000	135	157	1.97	10.63	8.07	6.89	3.15	5.0	4.0	26.5	28.7
SCS38-100	64,000	135	157	3.94	14.57	10.04	8.77	5.21	5.0	4.0	30.9	33.1
SCS38-150	96,000	135	157	5.91	18.50	12.01	10.83	7.08	5.0	4.0	35.3	37.5
SCS38-200	127,000	135	157	7.87	22.44	13.98	12.80	9.05	5.0	4.0	39.7	41.9
SCS38-250	159,000	135	157	9.84	26.38	15.94	14.77	11.02	4.7	3.7	44.1	46.3
SCS38-300	191,000	135	157	11.81	30.91	18.50	17.33	12.99	3.9	2.9	48.5	48.5
SCS38-350	223,000	135	157	13.78	34.84	20.47	19.29	14.96	3.4	2.4	52.9	55.1
SCS38-400	255,000	135	157	15.75	39.37	23.03	21.85	16.93	3.0	2.0	57.3	59.5
SCS38-500	319,000	135	157	19.69	47.83	27.56	26.38	20.56	2.4	1.4	66.2	68.4
SCS38-600	382,000	135	157	23.62	56.30	32.09	30.91	24.80	1.9	0.9	75.0	75.0
SCS38-700	446,000	135	157	27.56	64.76	36.61	35.43	28.74	1.6	0.6	83.8	86.0
SCS38-800	510,000	135	157	31.50	73.23	41.14	39.97	32.67	1.3	0.3	94.8	97.0


<sup>1</sup> The values are reduced by 20 % at max. side load angle.

High Rack Damper, Optimized Characteristic


**SCS50-F Front Flange**

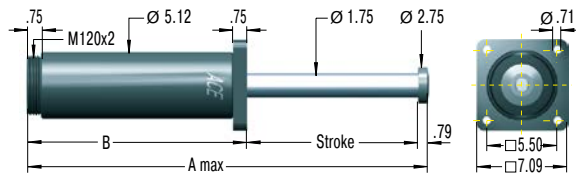

**SCS50-R Rear Flange**

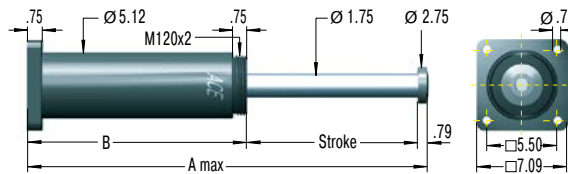

**SCS50-S Foot Mount**

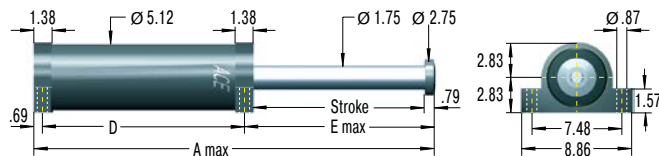

**Technical Data**

**Impact velocity range:** 2 ft/sec to 15 ft/sec

**Complete details required when ordering**

- Moving load: W (lbs)
- Impact velocity range: v (ft/s) max.
- Creep speed: vs (ft/s)
- Motor power: HP (horsepower)
- Stall torque factor: ST (normal, 2.5)
- (Alternatively: Propelling force F (lbs))
- Number of absorbers in parallel: n

or technical data according to formulae and calculations on page 275.

The calculation and selection of the most suitable damper should be carried out or be approved by ACE.

**Ordering Example**

Safety Shock Absorber \_\_\_\_\_  
 Bore Size Ø 1.97" (50 mm) \_\_\_\_\_  
 Stroke 15.75" (400 mm) \_\_\_\_\_  
 Mounting Style: Front Flange \_\_\_\_\_  
 Identification No. assigned by ACE \_\_\_\_\_

**Please indicate identification no. in case of replacement order**


Please contact the factory for complete part number.

**Performance and Dimensions**


TYPES	Energy capacity in-lbs/cycle	Return Force		Stroke inch	A max. inch	B inch	D inch	E max. inch	Mounting Style		Mounting Style	
		min. lbs	max. lbs						<sup>1</sup> F and S Side Load Angle max. °	<sup>1</sup> R Side Load Angle max. °	F and R Weight lbs	S Weight lbs
SCS50-100	124,000	225	270	3.94	15.35	10.63	9.25	5.41	5.0	4.0	48.5	50.7
SCS50-150	186,000	225	270	5.91	19.29	12.60	11.22	7.38	5.0	4.0	55.1	57.3
SCS50-200	248,000	225	270	7.87	23.23	14.57	13.19	9.35	5.0	4.0	59.5	61.7
SCS50-250	310,000	225	270	9.84	27.17	16.54	15.16	11.32	4.5	3.5	66.2	68.4
SCS50-300	372,000	225	270	11.81	31.69	19.09	17.71	13.29	3.8	2.8	72.8	75.0
SCS50-350	434,000	225	270	13.78	35.63	21.06	19.69	15.25	3.3	2.3	77.2	81.6
SCS50-400	496,000	225	270	15.75	40.16	23.62	22.25	17.22	2.9	1.9	83.8	88.2
SCS50-500	620,000	225	270	19.69	48.62	28.15	26.77	21.16	2.3	1.3	97.0	99.2
SCS50-600	743,000	225	270	23.62	57.09	32.68	31.30	25.10	1.9	0.9	110.3	112.5
SCS50-700	867,000	225	270	27.56	65.55	37.20	35.83	29.03	1.6	0.6	121.3	125.7
SCS50-800	991,000	225	270	31.50	74.02	41.73	40.36	32.97	1.3	0.3	134.5	138.9
SCS50-1000	1,239,000	225	270	39.37	90.94	50.79	49.40	40.85	1.0	0.0	158.8	163.2

<sup>1</sup> The values are reduced by 20 % at max. side load angle.


## SCS63-F Front Flange

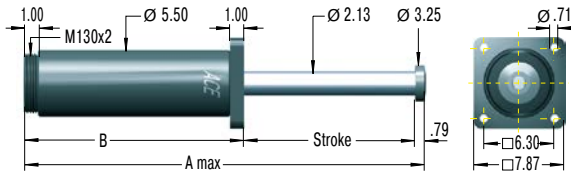

## SCS63-R Rear Flange

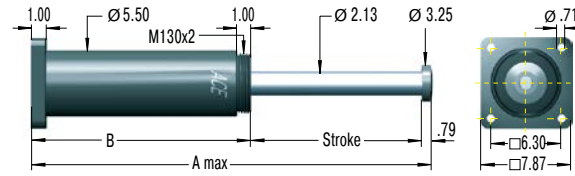

## SCS63-S Foot Mount

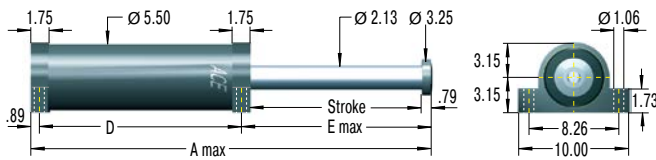

## Technical Data

**Impact velocity range:** 1.6 ft/sec to 15 ft/sec

### Complete details required when ordering

- Moving load: W (lbs)
- Impact velocity range: v (ft/s) max.
- Creep speed: vs (ft/s)
- Motor power: HP (horsepower)
- Stall torque factor: ST (normal, 2.5)
- (Alternatively: Propelling force F (lbs))
- Number of absorbers in parallel: n

or technical data according to formulae and calculations on page 275.

**The calculation and selection of the most suitable damper should be carried out or be approved by ACE.**

### Ordering Example

Safety Shock Absorber \_\_\_\_\_ **SCS63-400-F-X**  
 Bore Size  $\varnothing$  2.48" (63 mm) \_\_\_\_\_  
 Stroke 15.75" (400 mm) \_\_\_\_\_  
 Mounting Style: Front Flange \_\_\_\_\_  
 Identification No. assigned by ACE \_\_\_\_\_

**Please indicate identification no. in case of replacement order**

Please contact the factory for complete part number.

## Performance and Dimensions

TYPES	Energy capacity in-lbs/cycle	Return Force		Stroke inch	A max. inch	B inch	D inch	E max. inch	Mounting Style		Mounting Style	
		min. lbs	max. lbs						<sup>1</sup> F and S Side Load Angle max. °	<sup>1</sup> R Side Load Angle max. °	F and R Weight lbs	S Weight lbs
SCS63-100	159,000	337	562	3.94	15.94	11.22	9.47	5.59	5.0	4.0	63.9	70.6
SCS63-150	239,000	337	562	5.91	19.88	13.19	11.44	7.56	5.0	4.0	70.6	77.2
SCS63-200	319,000	337	562	7.87	23.82	15.16	13.41	9.53	5.0	4.0	77.2	83.8
SCS63-250	398,000	337	562	9.84	27.76	17.13	15.39	11.49	5.0	4.0	83.8	92.6
SCS63-300	478,000	337	562	11.81	31.69	19.09	17.35	13.46	5.0	4.0	90.4	99.2
SCS63-350	558,000	337	562	13.78	36.42	21.85	20.11	15.43	5.0	4.0	99.2	108.0
SCS63-400	637,000	337	562	15.75	40.35	23.82	22.01	17.40	5.0	4.0	105.8	114.7
SCS63-500	797,000	337	562	19.69	49.02	28.54	26.80	21.34	4.2	3.2	121.3	132.3
SCS63-600	956,000	337	562	23.62	56.89	32.48	30.74	25.30	3.4	2.4	136.7	145.5
SCS63-700	1,115,000	337	562	27.56	65.55	37.20	35.46	29.21	2.9	1.9	152.1	161.0
SCS63-800	1,275,000	337	562	31.50	73.43	41.14	39.40	33.15	2.5	1.5	165.4	174.2
SCS63-1000	1,593,000	337	562	39.37	89.96	49.80	48.06	41.02	1.9	0.9	196.2	205.1
SCS63-1200	1,912,000	337	562	47.24	106.50	58.46	56.72	48.90	1.4	0.4	224.9	233.7

<sup>1</sup> The values are reduced by 20 % at max. side load angle.

## CB63 to CB160

High resetting forces with gas pressure accumulator

Crane Installations, Optimized Characteristic


Energy capacity 141,600 in-lbs/Cycle to 4,248,000 in-lbs/Cycle

Stroke 3.94 in to 31.50 in

Robust powerhouse: the CB63 to CB160 product family with internal system seals are used in heavy duty areas for emergency stop. Even dirt or scratches to the piston rod do not lead to a leakage or failure. Compressed gas accumulators allow return forces of up to 22,481 lb. (100 kN) in the CB models, which can make applications in multiple bridge crane systems safer, for example. The absorber body and the robust, large-sized piston rod bearing are also designed for heavy duty operations.

ACE uses our proprietary custom calculation program to design each shock absorber for the specific customer application. Customization helps reduce the risk of crashes and incorrect product sizing. Just like all ACE safety shock absorbers, the characteristic curve or damping characteristics of each individual CB unit is individually designed to the customer application.

Whether its crane systems or machines in heavy duty applications e.g. in the metal industry or in mining, these powerful safety shock absorbers reliably protect construction designs against expensive failure.

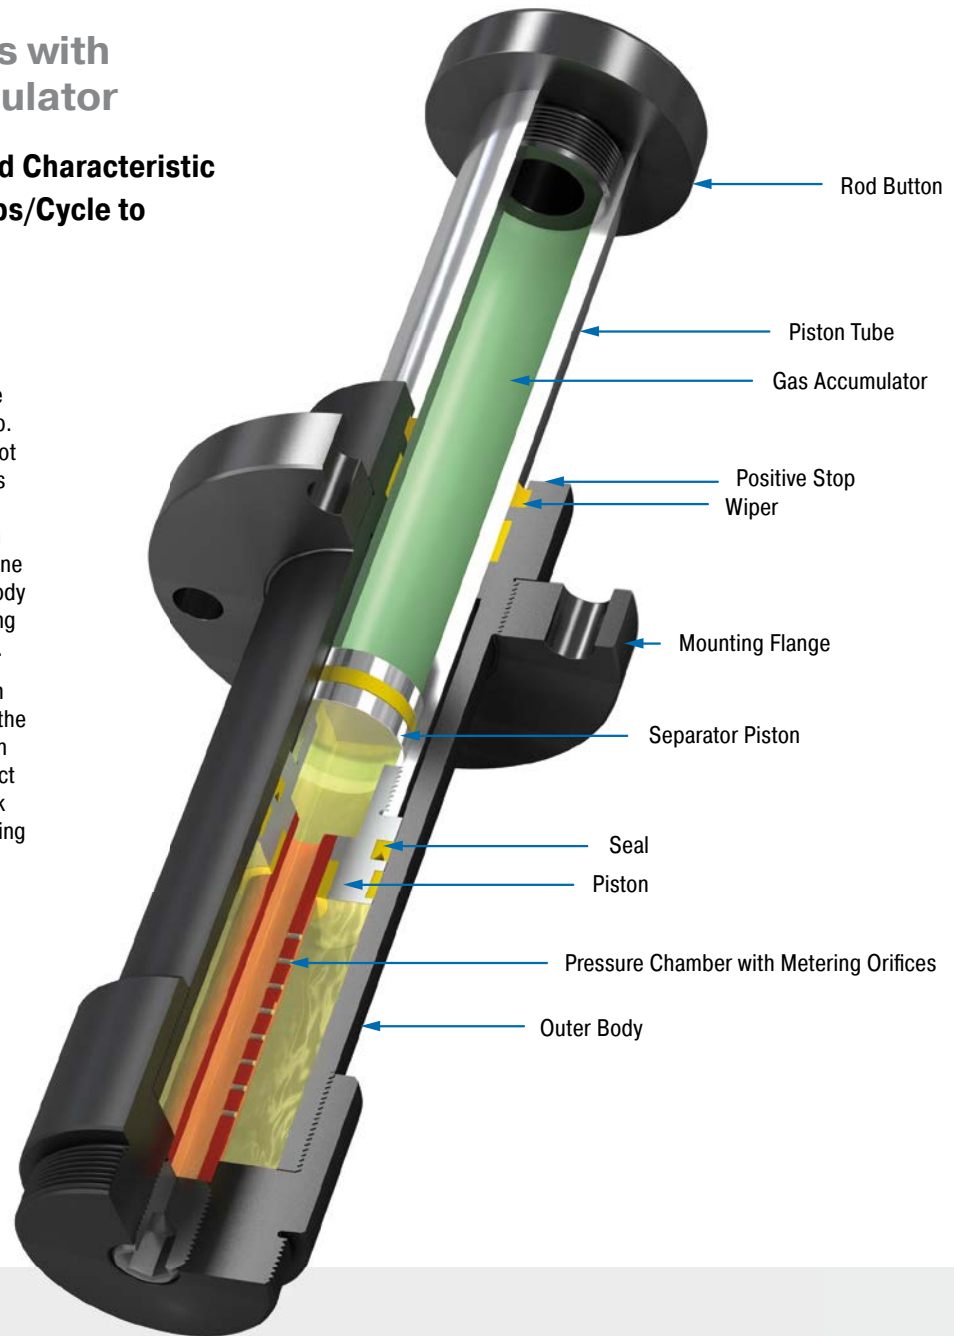

### Technical Data

**Energy capacity:** 141,600 in-lbs/Cycle to 4,248,000 in-lbs/Cycle

**Impact velocity range:** 1.6 ft/sec to 15 ft/sec. Other speeds on request.

**Reacting force:** At max. capacity rating = 42,000 lbs to 157,000 lbs

**Operating temperature range:** 10 °F to 150 °F. Other temperatures on request.

**Mounting:** In any position

**Positive stop:** Integrated

**Material:** Outer body, Rod end button: Steel corrosion-resistant coating; Piston tube: Hard chrome plated steel

**Damping medium:** Automatic Transmission Fluid (ATF)







**Filling pressure:** Approx. 81 psi to 86 psi. Rod return by integrated nitrogen accumulator.

**Application field:** Heavy load applications, Heavy load applications, Conveyor systems, Portal systems

**Note:** The shock absorber can be pushed through its stroke. In creep speed conditions the shock absorber provides minimal resistance and there is no braking effect.

**On request:** Special oils, special flanges, additional corrosion protection etc.

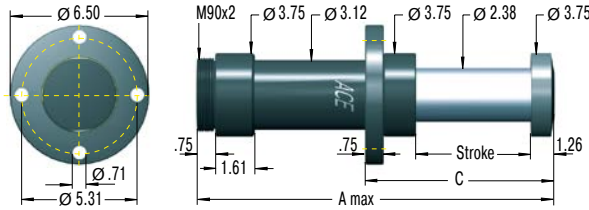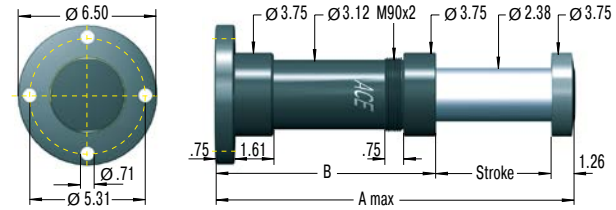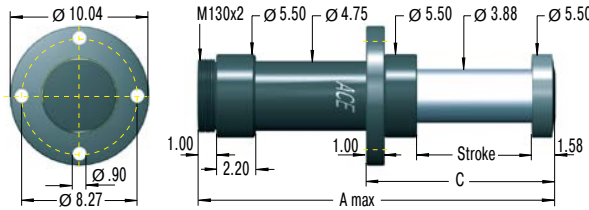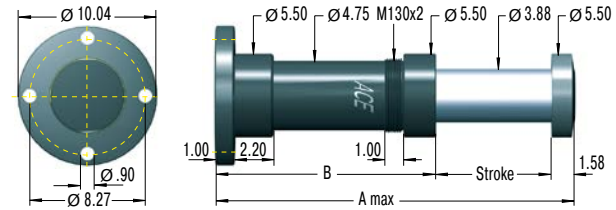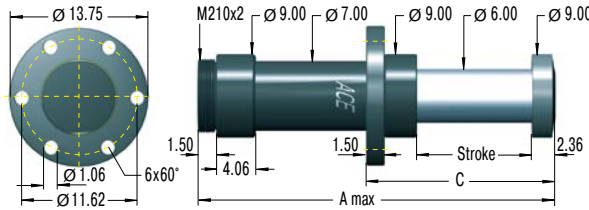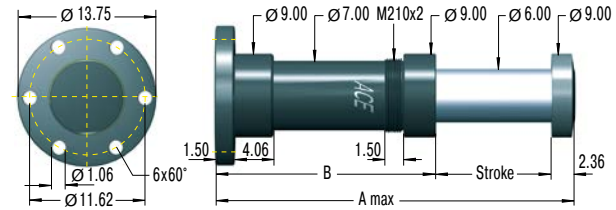

**CB63-F Front Flange**

**Reacting force:** at max. capacity rating = **42,000 lbs max.**
**CB63-R Rear Flange**

**Reacting force:** at max. capacity rating = **42,000 lbs max.**
**CB100-F Front Flange**

**Reacting force:** at max. capacity rating = **105,000 lbs max.**
**CB100-R Rear Flange**

**Reacting force:** at max. capacity rating = **105,000 lbs max.**
**CB160-F Front Flange**

**Reacting force:** at max. capacity rating = **157,000 lbs max.**
**CB160-R Rear Flange**

**Reacting force:** at max. capacity rating = **157,000 lbs max.**
**Complete details required when ordering**

- Moving load: W (lbs)
- Impact velocity range: v (ft/s) max.
- Creep speed: vs (ft/s)
- Motor power: HP (horsepower)
- Stall torque factor: ST (normal, 2.5)
- (Alternatively: Propelling force F (lbs))
- Number of absorbers in parallel: n

or technical data according to formulae and calculations on page 275.

**The calculation and selection of the most suitable damper should be carried out or be approved by ACE.**
**Ordering Example**

Safety Shock Absorber **CB63-400-F-X**  
 Bore Size 2.48" (63 mm)  
 Stroke 15.75" (400 mm)  
 Mounting Style: Front Flange  
 Identification No. assigned by ACE

**Please indicate identification no. in case of replacement order**

Please contact the factory for complete part number.

**Performance and Dimensions**

TYPES	E <sub>3</sub> in-lbs/cycle	Effective Weight		Return Force min. lbs	Return Force max. lbs	Stroke inch	A max. inch	B inch	C inch	Side Load Angle max. °	Weight lbs
		We min. lbs	We max. lbs								
CB63-100	141,600	3,330	282,000	393	4,110	3.94	16.54	11.34	7.56	3.5	28.0
CB63-200	283,200	6,660	564,000	393	5,392	7.87	27.56	18.43	11.50	3.0	36.8
CB63-300	424,800	10,010	847,000	393	6,038	11.81	38.58	25.51	15.43	2.5	45.9
CB63-400	566,400	13,340	1,129,000	393	6,404	15.75	49.61	32.60	19.37	2.0	54.7
CB63-500	708,000	16,670	1,411,000	393	6,660	19.69	60.63	39.69	23.31	1.5	63.5
CB100-200	708,000	16,670	1,411,000	1,005	9,917	7.87	28.94	19.49	12.60	4.0	93.7
CB100-300	1,062,000	25,000	2,116,000	1,005	12,540	11.81	39.57	26.18	16.54	3.5	112.0
CB100-400	1,416,000	33,330	2,822,000	1,005	14,459	15.75	50.20	32.87	20.47	3.0	130.3
CB100-500	1,770,000	41,670	3,527,000	1,005	15,916	19.69	60.83	39.57	24.41	2.5	148.8
CB100-600	2,124,000	50,000	4,233,000	1,005	17,058	23.62	71.46	46.26	28.35	2.0	167.1
CB160-400	2,124,000	50,000	4,233,000	2,455	15,845	15.75	55.12	37.01	23.62	4	339.6
CB160-600	3,186,000	75,000	6,349,000	2,455	15,857	23.62	78.74	52.76	31.50	3	414.5
CB160-800	4,248,000	100,000	8,466,000	2,455	15,869	31.50	102.36	68.50	39.37	2	487.3

<sup>1</sup> The values are reduced by 20 % at max. side load angle.

## EB63 to EB160

### Low return force with spring assembly

#### Crane Installations, Optimized Characteristic

**Energy capacity 141,600 in-lbs/Cycle to**


**4,248,000 in-lbs/Cycle**

**Stroke 3.94 in to 31.50 in**

Reduced return forces: the ACE safety shock absorbers from the EB-Family offer internal system seals, large sized piston rod bearings and the maximum energy absorption for emergency stop applications. However, an integrated spring package in the robust shock absorber body makes sure that the return forces are reduced to a fraction of those in the CB-Family.

The damping characteristics of the maintenance-free and ready-to-install EB models is individually designed specific to the customer application, just like all ACE safety shock absorbers.

These safety shock absorbers reliably perform their services in crane systems and in numerous heavy duty applications, even if the power fails, because these hydraulic machine elements are independent braking systems.

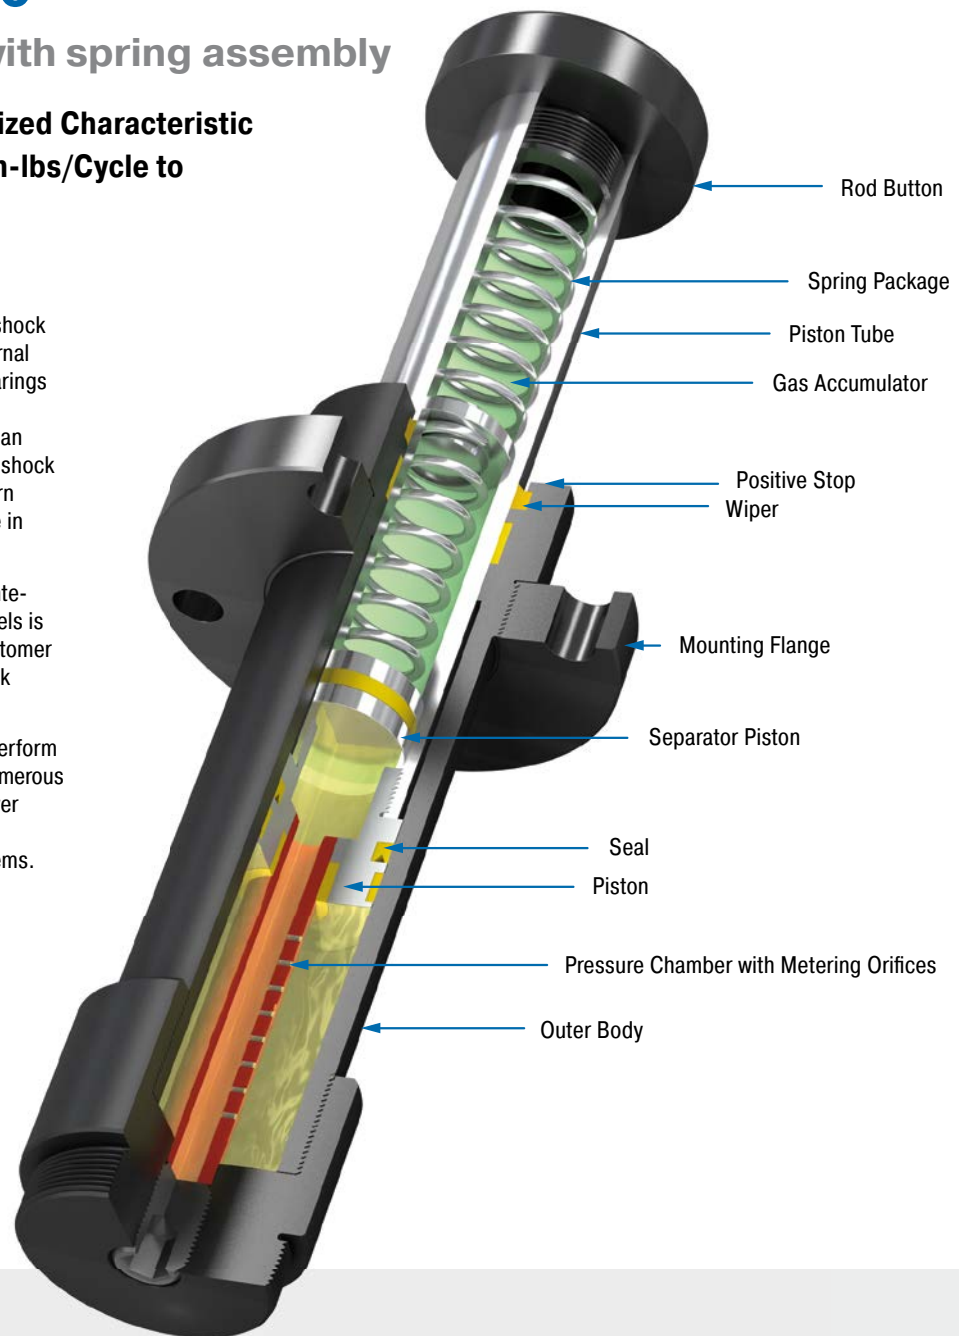

### Technical Data

**Energy capacity:** 141,600 in-lbs/Cycle to 4,248,000 in-lbs/Cycle

**Impact velocity range:** 1.6 ft/sec to 15 ft/sec. Other speeds on request.

**Reacting force:** At max. capacity rating = 42,000 lbs to 157,000 lbs

**Operating temperature range:** 10 °F to 150 °F. Other temperatures on request.

**Mounting:** In any position

**Positive stop:** Integrated

**Material:** Outer body, Rod end button: Steel corrosion-resistant coating; Piston tube: Hard chrome plated steel







**Damping medium:** Automatic Transmission Fluid (ATF)

**Filling pressure:** Approx. 8 psi to 16 psi. Rod return by integrated nitrogen accumulator combined with additional return spring.

**Application field:** Heavy load applications, Heavy load applications, Conveyor systems, Portal systems

**Note:** The shock absorber can be pushed through its stroke. In creep speed conditions the shock absorber provides minimal resistance and there is no braking effect.

**On request:** Special oils, special flanges, additional corrosion protection etc.

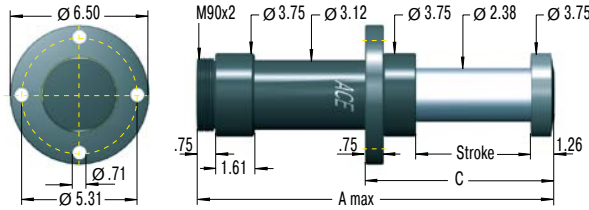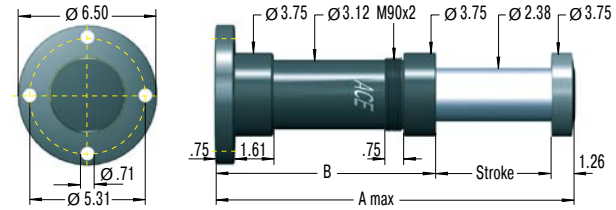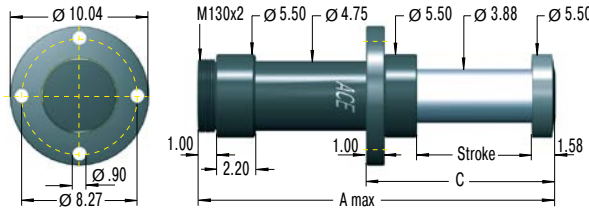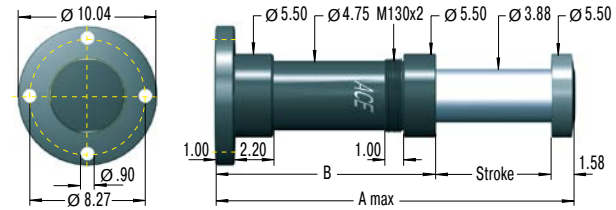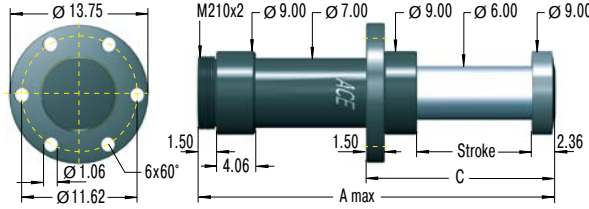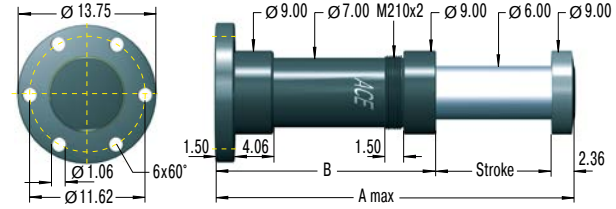**EB63-F Front Flange**

**Reacting force:** at max. capacity rating = **42,000 lbs max.**
**EB63-R Rear Flange**

**Reacting force:** at max. capacity rating = **42,000 lbs max.**
**EB100-F Front Flange**

**Reacting force:** at max. capacity rating = **105,000 lbs max.**
**EB100-R Rear Flange**

**Reacting force:** at max. capacity rating = **105,000 lbs max.**
**EB160-F Front Flange**

**Reacting force:** at max. capacity rating = **157,000 lbs max.**
**EB160-R Rear Flange**

**Reacting force:** at max. capacity rating = **157,000 lbs max.**
**Complete details required when ordering**

- Moving load: W (lbs)
- Impact velocity range: v (ft/s) max.
- Creep speed: vs (ft/s)
- Motor power: HP (horsepower)
- Stall torque factor: ST (normal, 2.5)
- (Alternatively: Propelling force F (lbs))
- Number of absorbers in parallel: n

or technical data according to formulae and calculations on page 275.

**The calculation and selection of the most suitable damper should be carried out or be approved by ACE.**
**Ordering Example**

**EB63-400-F-X**

Safety Shock Absorber \_\_\_\_\_

Bore Size 2.48" (63 mm) \_\_\_\_\_

Stroke 15.75" (400 mm) \_\_\_\_\_

Mounting Style: Front Flange \_\_\_\_\_

Identification No. assigned by ACE \_\_\_\_\_

**Please indicate identification no. in case of replacement order**

Please contact the factory for complete part number.

**Performance and Dimensions**

TYPES	E <sub>3</sub> in-lbs/cycle	Effective Weight		Return Force min. lbs	Return Force max. lbs	Stroke inch	A max. inch	B inch	C inch	1 Side Load Angle max. °	Weight lbs
		We min. lbs	We max. lbs								
EB63-100	141,600	3,330	282,000	157	1,562	3.94	16.54	11.34	7.56	3.5	30.2
EB63-200	283,200	6,660	564,000	172	2,084	7.87	27.56	18.43	11.50	3.0	36.8
EB63-300	424,800	10,010	847,000	187	2,372	11.81	38.58	25.51	15.43	2.5	48.1
EB63-400	566,400	13,340	1,129,000	136	2,496	15.75	49.61	32.60	19.37	2.0	56.9
EB63-500	708,000	16,670	1,411,000	151	2,691	19.69	60.63	39.69	23.31	1.5	65.7
EB100-200	708,000	16,670	1,411,000	271	1,999	7.87	28.94	19.49	12.60	4.0	93.7
EB100-300	1,062,000	25,000	2,116,000	213	3,163	11.81	39.57	26.18	16.54	3.5	112.0
EB100-400	1,416,000	33,330	2,822,000	267	4,089	15.75	50.20	32.87	20.47	3.0	130.3
EB100-500	1,770,000	41,670	3,527,000	209	4,686	19.69	60.83	39.57	24.41	2.5	151.0
EB100-600	2,124,000	50,000	4,233,000	263	5,248	23.62	71.46	46.26	28.35	2.0	169.3
EB160-400	2,124,000	50,000	4,233,000	421	4,071	15.75	55.12	37.01	23.62	4	343.1
EB160-600	3,186,000	75,000	6,349,000	474	4,225	23.62	78.74	52.76	31.50	3	416.7
EB160-800	4,248,000	100,000	8,466,000	535	4,380	31.50	102.36	68.50	39.37	2	490.2

1 The values are reduced by 20 % at max. side load angle.

### Permitted Use

ACE safety shock absorbers are machine elements to brake moving masses in a defined end position in emergency stop situations for axial forces. The safety shock absorbers are not designed for regular operational usage.

### Calculation of safety shock absorbers

The calculation of safety shock absorbers should generally be performed or checked by ACE.

### Deceleration Properties

The orifice sizing and drill pattern in the pressure chamber are individually designed for each safety shock absorber. The respective absorption characteristic is optimized corresponding to the maximum mass that occurs in the emergency stop and the impact speed. Correspondingly, each safety shock absorber is given an individual identification number.

### Model Code

For types SCS33 to 64, the individual five-digit identification numbers can be taken from the last digits of the shock absorber model code shown on the label. Example: SCS33-50-XXXXX. For type series SCS38 to SCS63, CB63 to CB160 and EB63 to EB160, the identification number is a five digit number. Example: SCS38-400-F-XXXXX. In addition to the model code, the label also shows the authorized maximum impact velocity and maximum authorised impact mass for the unit. The factory assigns these identification numbers. Please contact the factory for complete part number.

### Mounting

To mount the shock absorber, we recommend the use of original ACE mounting accessories shown in catalog.

The mounting of each shock absorber must be exactly positioned so that the reaction force (Q) can be adequately transmitted into the mounting structure.

ACE recommends installation via the front flange -F mounting style that ensures the maximum protection against buckling. The damper must be mounted so that the moving loads are decelerated with the least possible side loading to the piston rod. The maximum permissible side load angles are detailed in our current catalogue.

The entire stroke length must be used for deceleration because only using part of the stroke can lead to overstressing and damage to the unit.

### Mounting style front flange



Safety Shock Absorber SCS 38-66



Safety Shock Absorber CB

### Environmental Requirements

The permissible **temperature range** for each shock absorber type can be found in our current catalogue.

**Caution:** Usage outside the specified temperature range can lead to premature breakdown and damage of the shock absorbers which can then result in severe system damage or machine failures.

Trouble free operation outdoors or in damp environments is only warranted if the dampers are coated with a specific corrosion protection finish.

### Initial Start-Up Checks

First impacts on the shock absorber should only be tried after correctly mounting and with reduced impact speeds and – if possible – with reduced load. Differences between calculated and actual operating data can then be detected early on, and damage to your system can be avoided. If the shock absorbers were selected on calculated data that does not correspond to the maximum possible loading (i.e. selection based on drive power being switched off or at reduced impact speed) then these restricted impact conditions must not be exceeded during initial testing or subsequent use of the system. Otherwise you risk damaging the shock absorbers and/or your machine by overstressing materials. After the initial trial check that the piston rod fully extends again and that there are no signs of oil leakage. Also check that the mounting hardware is still securely tightened. You need to satisfy yourself that no damage has occurred to the piston rod, the body, or the mounting hardware.

### Fixed Mechanical Stop

Safety shock absorbers do not need an external stop as a stroke limiter. The stroke of the safety absorber is limited by the stop of the impact head on the shock absorber. For types SCS33 to SCS64, the fixed stop point is achieved with the integrated stop collar.

### What Needs to be Checked after a Full Load Impact?

Safety shock absorbers that were originally checked only at reduced speed or load need to be checked again after a full load impact (i.e. emergency use) has occurred. Check that the piston rod fully extends to its full out position, that there are no signs of oil leakage and that the mounting hardware is still securely fixed. You need to satisfy yourself that no damage has occurred to the piston rod, the body, or the mounting hardware. If no damage has occurred, the safety shock absorber can be put back into normal operation (see **initial start-up**).

### Maintenance

Safety shock absorbers are sealed systems and do not need special maintenance. Safety shock absorbers that are not used regularly (i.e. that are intended for emergency stop systems) should be checked within the normal time frame for safety checks, but **at least once a year**. At this time special attention must be paid to checking that the piston rod resets to its fully extended position, that there is no oil leakage and that the mounting brackets are still secure and undamaged. The piston rod must not show any signs of damage. Safety shock absorbers that are **in use regularly** should be checked **every three months**.

### Repair Notice

If any damage to the shock absorber is detected or if there are any doubts as to the proper functioning of the unit please send the unit for service to ACE. Alternatively contact your local ACE office for further advice.

[Detailed information on the above listed points can be taken from the corresponding operating and assembly instructions.](#)

### Calculation Data for the Design of Safety Shock Absorbers

More formulas on pages 10 to 13

ACE shock absorbers provide linear deceleration and are therefore superior to other kinds of damping element. It is easy to calculate around 90 % of applications knowing only the following four parameters:

1. **Weight to be decelerated** **W** [lbs]
2. **Impact velocity at shock absorber** **v<sub>D</sub>** [ft/s]
3. **Propelling force** **F** [lbs]
4. **Number of absorbers in parallel** **n**

#### Key to symbols used




E <sub>1</sub>	Kinetic energy per cycle	in-lbs	<sup>2</sup> v <sub>D</sub>	Impact velocity at shock absorber	ft/s
E <sub>2</sub>	Propelling force energy per cycle	in-lbs	F	Propelling force	lbs
E <sub>3</sub>	Total energy per cycle (E <sub>1</sub> + E <sub>2</sub> )	in-lbs	c	Cycles per hour	1/hr
<sup>1</sup> E <sub>4</sub>	Total energy per hour (E <sub>3</sub> · x)	in-lbs/hr	s	Shock absorber stroke	in
We	Effective weight	lbs	Q	Reaction force	lbs
W	Weight to be decelerated	lbs	t	Deceleration time	s
n	Number of shock absorbers (in parallel)		a	Deceleration	ft/s <sup>2</sup>
<sup>2</sup> v	Velocity at impact	ft/s			

<sup>1</sup> All mentioned values of E<sub>4</sub> in the capacity charts are only valid for room temperature. There are reduced values at higher temperature ranges.

<sup>2</sup> v or v<sub>D</sub> is the final impact velocity of the mass. With accelerating motion the final impact velocity can be 1.5 to 2 times higher than the average. Please take this into account when calculating kinetic energy.

In all the following examples the choice of shock absorbers made from the capacity chart is based upon the values of (E<sub>3</sub>), (E<sub>4</sub>), (We) and the desired shock absorber stroke(s).

**Note:** When using several shock absorbers in parallel, the values (E<sub>3</sub>), (E<sub>4</sub>) and (We) are divided according to the number of units used.

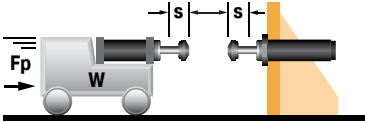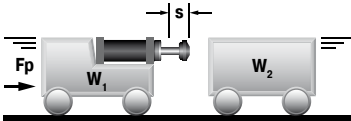Application	Formula	Example
<b>19 Wagon against 2 shock absorbers</b> 	$E_1 = 0.093 \cdot W \cdot v^2$ $E_2 = F \cdot s$ $E_3 = E_1 + E_2$ $v_D = v \cdot 0.5$ $We = E_3 / (0.186 \cdot v_D^2)$	W = 2000 lbs F = 500 lbs v = 5 ft/s s = 1.91 in (chosen) $E_1 = 0.093 \cdot 2000 \cdot 5^2 = 4650$ in-lb $E_2 = 500 \cdot 1.91 = 955$ in-lb $E_3 = 4650 + 955 = 5605$ in-lb $E_4 = 5605 \cdot 20 = 112100$ in-lb/hr $v_D = 5 \cdot 0.5 = 2.5$ ft/s $We = 5605 / (0.186 \cdot 2.5^2) = 4194$ lbs Chosen from capacity chart: Model SCS45-50 self-compensating
<b>20 Wagon against wagon</b> 	$E_1 = \frac{0.186 (W_1 \cdot W_2)}{(W_1 + W_2) \cdot (v_1 + v_2)^2}$ $E_2 = F \cdot s$ $E_3 = E_1 + E_2$ $E_4 = E_3 \cdot c$ $v_D = (v_1 + v_2) / 2$ $We = E_3 / (0.186 \cdot v_D^2)$	W = 4000 lbs v <sub>1</sub> = 2 ft/s c = 30 /hr W <sub>2</sub> = 8000 lbs v <sub>2</sub> = 1.2 ft/s F = 1000 lbs s = 1.91 in (chosen) $E_1 = \frac{0.186 (4000 \cdot 8000)}{(4000 + 8000) \cdot (2 + 1.2)^2} = 5079$ in-lb $E_2 = 1000 \cdot 2.91 = 2910$ in-lb $E_3 = 5079 + 2910 = 7989$ in-lb $v_D = 2 + 1.2 = 1.6$ ft/s $We = 7989 / (0.186 \cdot 3.2^2) = 4194$ lbs Chosen from capacity chart: Model SCS45-75 self-compensating
<b>21 Wagon against wagon 2 shock absorbers</b> 	$E_1 = \frac{0.093 (W_1 \cdot W_2)}{(W_1 + W_2) \cdot (v_1 + v_2)^2}$ $E_2 = F \cdot s$ $E_3 = E_1 + E_2$ $E_4 = E_3 \cdot c$ $v = v_1 + v_2 / 2$ $We = E_3 / (0.186 \cdot v_D^2)$	W = 4000 lbs v <sub>1</sub> = 2 ft/s c = 30 /hr W <sub>2</sub> = 8000 lbs v <sub>2</sub> = 1.2 ft/s F = 1000 lbs s = 1.91 in (chosen) $E_1 = \frac{0.093 (4000 \cdot 8000)}{(4000 + 8000) \cdot (2 + 1.2)^2} = 2540$ in-lb $E_2 = 1000 \cdot 1.91 = 1910$ in-lb $E_3 = 2540 + 1910 = 4450$ in-lb $v_D = (2 + 1.2) / 2 = 1.6$ ft/s $We = 4450 / (0.186 \cdot 1.6^2) = 9346$ lbs Chosen from capacity chart: Model SCS45-50 self-compensating

## Application Examples


### SCS45

#### Controlled emergency stop

ACE safety shock absorbers protect precision assembly jigs for the aircraft industry. The basic mount of this coordinate measuring machine for the production of parts in the aircraft industry is made of granite and must not be damaged. To avoid damage from operating errors or mishandling, all movement axes were equipped with safety shock absorbers of the type SCS45-50. If the turntables malfunction the safety shock absorbers decelerate the loads before expensive damage can occur to the granite measuring tables.




Optimally protected turntable

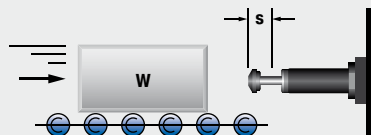


### SCS33, SCS45

#### High-level protection of linear modules

Safety shock absorbers produced by ACE are installed in the top linear system models of one of the most prestigious companies in the field of drive and control technology. Their job: to protect the z-axis from damage caused by uncontrolled movements. Various safety dampers are used for different load ranges. Tests have shown that, in the worst case, a collision speed of up to 16.5 f/s might occur. To be on the safe side, the interpretations were based in all cases on a slightly higher value.

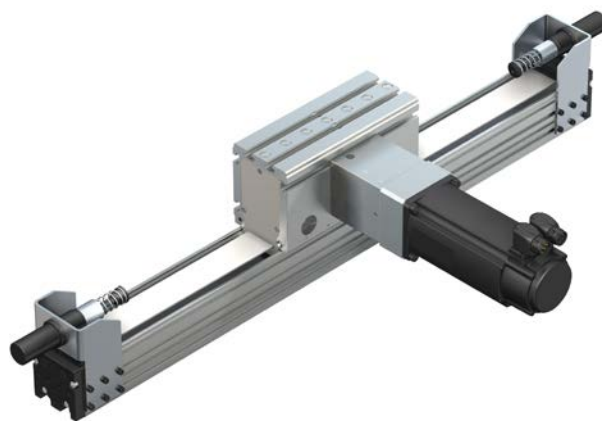

For protecting equipment and modules such as these, the SCS series from ACE is the ideal solution in the emergency stop sector  
Roth GmbH & Co. KG, 90411 Nürnberg, Germany and  
Bosch Rexroth AG, 97816 Lohr am Main, Germany

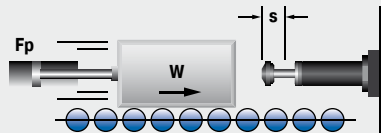

**SCS38**


**Safe driving in end positions with ACE**

The aim was to protect a driving simulation capsule on two of its eight axes. The demands placed on a potential emergency stopper were high because it was clear that its failure would lead to massive damage to the complete construction as well as to the capsule. Even the possibility of damage to the health of the test personnel could not be ruled out and was taken into consideration in a diverse range of mass-speed combinations. Two ACE safety shock absorbers now safely contain destructive forces, e.g. during power outages, and eliminate high risks.



ACE safety shock absorbers protect end positions in two axes of a driving simulator

Bosch Rexroth BV, Boxtel 5281 RV, The Netherlands and  
University of Stuttgart - FKFS, 70569 Stuttgart, Germany

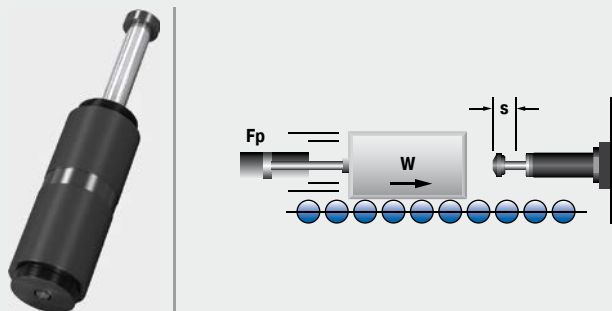

## Safety Bumpers

### Top for emergency stopping

**The extremely successful TUBUS series from ACE is suitable for emergency stopping, as overrun protection or as end stop dampers. Available in different variations for heavy duty or crane installations, these profile dampers are perfect when loads do not need to be instantly decelerated or when working under extreme conditions.**

Made of co-polyester elastomer, the highly resistant absorbers provide high force and energy absorption in areas where other materials fail or where a similarly high service life of up to 1 million load cycles cannot be achieved. They are cost-effective and distinguished by the small, light design. With energy absorption within a range of 3,983 and 157,632 in-lbs, they can be considered as an alternative to hydraulic end position damping.





## Safety Bumpers



### TUBUS TC and TC-S

Crane Installations

**Compact powerhouse**

Crane systems, Loading and lifting equipment, Hydraulic devices,  
Electro-mechanical drives

Page 280

Extremely durable

Highly resistant co-polyester elastomers

Lightweight designs

Cost-effective use

Heavy-duty versions available



## TUBUS TC and TC-S

### Compact powerhouse

#### Crane Installations

**Energy capacity 5,576 in-lbs/Cycle to 157,632 in-lbs/Cycle**

**Maximum stroke 1.18 in to 7.80 in**

For even more protection: the profile dampers from the TC range of the ACE TUBUS-Series can also be used as safety dampers. These maintenance-free, ready-to-install damping elements made of co-polyester elastomer have been specially developed for use in crane systems and meet the international industry standards for OSHA and CMAA. The TC-S design employs a unique dual concept to achieve the spring rate required for crane systems.

Whether TC-S or TC, this range of models represents a cost-effective solution with high energy absorption for energy management systems. The very small and light design of Ø 2.52" to Ø 6.93" (Ø 64 mm to Ø 176 mm) progressively covers energy absorption within a range of 3,983 in-lbs to 157,632 in-lbs (450 Nm to 17,810 Nm).

The profile dampers from the TC range protect cranes, loading and lifting equipment, hydraulic units and much more.



### Technical Data

**Energy capacity:** 5,576 in-lbs/Cycle to 157,632 in-lbs/Cycle

**Energy absorption:** 31 % to 64 %

**Dynamic force range:** 17,985 lbs to 219,864 lbs

**Operating temperature range:** -40 °F to 120 °F

**Construction size:** 2.52 in to 6.93 in

**Material hardness rating:** Shore 55D

**Material:** Profile body: Co-Polyester Elastomer

**Mounting:** In any position

**Environment:** Resistant to microbes, seawater or chemical attack. Excellent UV and ozone resistance. Material does not absorb water or swell.

**Impact velocity range:** Max. 16.4 ft/sec

**Torque max.:**

M12: 36.88 ft-lbs

M16: 29.50 ft-lbs (DIN912)


M16: 88.51 ft-lbs (shouldered screw)

**Application field:** Crane systems, Loading and lifting equipment, Hydraulic devices, Electro-mechanical drives

**Note:** Suitable for emergency stop applications and for continuous use. For applications with preloading and increased temperatures please consult ACE.


**On request:** Special strokes, -characteristics, -spring rates, -sizes and -materials.

TC

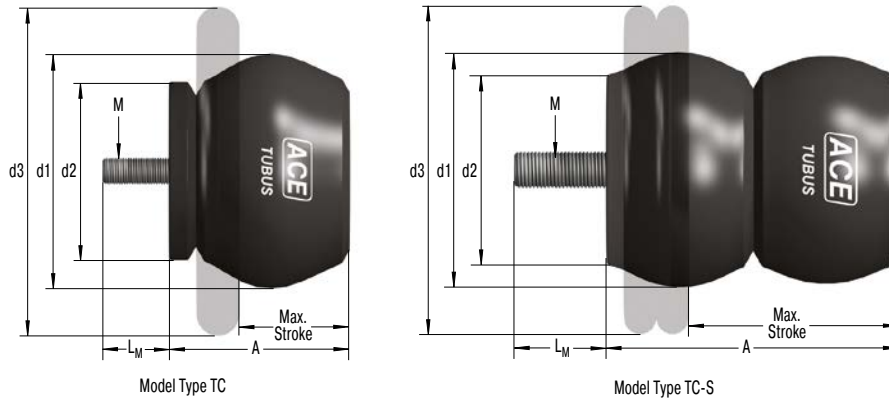


Characteristics

**Type TC90-49**  
**Energy-Stroke Characteristic (dynamic)**  
**(with impact velocity over 1.64 ft/s)**

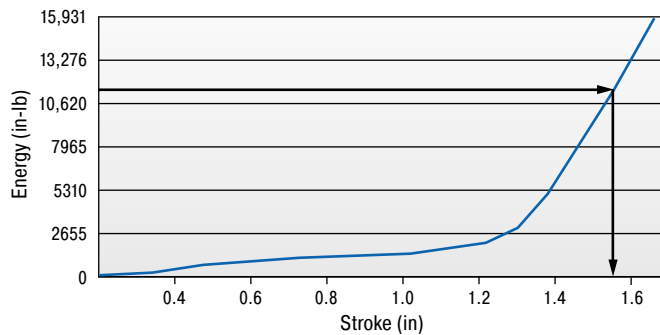

**Type TC90-49**  
**Force-Stroke Characteristic (dynamic)**  
**(with impact velocity over 1.64 ft/s)**

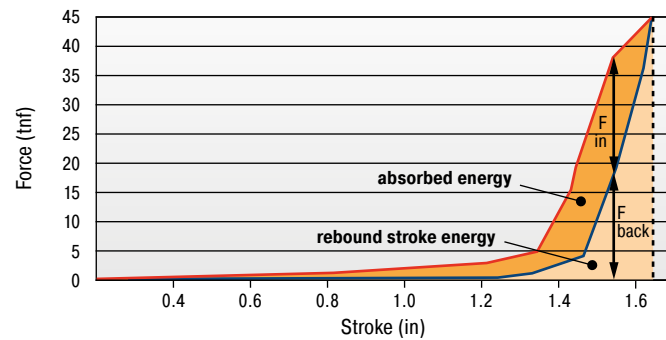

With the aid of the characteristic curves above you can estimate the proportion of the total energy that will be absorbed.

Example: With impact energy of 11,506 lbs the Energy-Stroke diagram shows that a stroke of 1.50 in is needed.

On the Force-Stroke diagram you can estimate the proportion of absorbed energy to rebound energy at this stroke length.

Note: With these types the return force towards the end of the stroke is significant and we recommend you try to use a minimum of 90 % of the total stroke available.

**Dynamic ( $v > 1.64$  ft/s) and static ( $v \leq 1.64$  ft/s) characteristics of all types are available on request.**

The calculation and selection of the most suitable damper should be carried out or be approved by ACE.

Ordering Example

TUBUS Crane Buffer \_\_\_\_\_ **TC83-73-S**  
 Outer- $\varnothing$  3.27" (83 mm) \_\_\_\_\_  
 Stroke 2.87" (73 mm) \_\_\_\_\_  
 Model Type Soft \_\_\_\_\_

Performance and Dimensions

TYPES	Emergency Stop		Stroke max. inch	A inch	d1 inch	d2 inch	d3 inch	L <sub>M</sub> inch	M	Weight lbs
	<sup>1</sup> E <sub>3</sub> in-lbs/cycle	E <sub>3</sub> in-lbs/cycle								
TC64-62-S	3,983	5,576	2.44	3.11	2.52	2.05	3.50	0.47	M12	0.385
TC74-76-S	8,674	12,143	2.99	3.78	2.91	2.40	4.49	0.47	M12	0.574
TC83-73-S	17,170	24,030	2.87	3.70	3.27	2.72	5.00	0.47	M12	0.722
TC86-39	10,709	15,002	1.54	2.20	3.39	3.07	5.24	0.47	M12	0.626
TC90-49	14,515	20,312	1.93	2.68	3.54	2.64	4.88	0.47	M12	0.583
TC100-59	15,799	22,127	2.32	3.31	3.94	3.58	5.87	0.47	M12	1.196
TC102-63	17,436	24,428	2.48	3.86	4.02	3.23	5.51	0.87	M16	1.459
TC108-30	16,816	23,543	1.18	2.09	4.25	3.03	5.24	0.47	M12	0.863
TC117-97	32,836	45,980	3.82	5.08	4.61	3.94	7.40	0.63	M16	2.299
TC134-146-S	64,699	90,543	5.75	7.40	5.28	4.61	8.46	1.18	M16	3.737
TC136-65	37,616	52,662	2.56	4.17	5.35	4.17	7.01	0.63	M16	2.529
TC137-90	56,202	78,683	3.54	4.53	5.39	4.45	8.50	0.83	M16	2.647
TC146-67-S	73,727	103,200	2.64	4.65	5.75	3.90	7.52	0.63	M16	3.468
TC150-178-S	78,418	109,749	7.01	9.49	5.91	5.20	8.82	0.63	M16	5.896
TC153-178-S	64,256	89,968	7.01	8.90	6.02	5.16	9.49	0.63	M16	5.560
TC168-124	89,392	125,149	4.88	6.54	6.61	5.79	10.24	0.63	M16	5.585
TC176-198-S	112,626	157,632	7.80	9.92	6.93	5.91	10.98	0.63	M16	8.070

<sup>1</sup> Max. energy capacity per cycle for continuous use.

## Clamping Elements

### On-the-spot clamping and stopping in emergencies and other situations

**Clamping elements from the LOCKED series provide a high level of safety. These ACE products clamp and decelerate loads and are suitable for perfectly controlled holding, both linear and rotary, in all processes.**

Alongside ACE LOCKED solutions for conventional rail, rod or rotation clamping, special clamps with safety function for Z-axes, which reliably help secure axes with a gravitational load, are available in the LOCKED LZ-P series. The latter solution is available for both pneumatic operation and as an electric version. Whether Z-axes, linear guide, rod or rotation clamping, the choice is (typical of ACE) as large as the performance capacity of the products, which are compatible with the solutions of all standard manufacturers.



**LOCKED by ACE. After all, safe is safe.**

**Increased process reliability**

**Available as clamping and emergency stop brakes**

**Very short stop distances**

**Very high clamping forces**

**Compact designs**

**Ideal for all standard sizes**



## Rail Clamping

### For safe deceleration of rail-guided construction elements

Safe deceleration of a mass that is traversed with the help of a rail and guide rail and track carriage combination must be complied with and not only for safety reasons; reliable clamps in the production processes are also becoming increasingly important.

Both features can be taken care of by the clamping elements from ACE. All clamping elements work with the patented spring steel plate system.


This system achieves braking and clamping forces of up to 2,248 lbs. The clamping elements are always individually adapted to the used linear guide. They are available for all rail sizes and profiles for all renowned manufacturers.

### Function of clamping elements LOCKED PL/SL/PLK/SLK


All process and safety clamps work with the reinforced spring steel plate system.

Compressed air is introduced between the two spring plates, which are connected with a surrounding rubber coating.

If pressure is applied, the clamping element can freely move; if the clamping element is vented clamping to the guide rail follows.



Clamping element ventilated



Clamping element vented

#### Released

The chamber filled with compressed air between the spring steel plates relaxes and thus releases the clamping/brake pads from the rail. The clamping element is now free to move.

#### Engaged


The clamping force of the mechanically pre-stressed spring steel plates is transferred to the clamping/brake pads as holding force. The clamping element is clamped on the guide rail.

### Slot dimensions between braking and clamping linings and linear guide rail

The internal dimension "I" between the linings of every LOCKED rail clamping is ground to an exact value.

This is always 0.0004 to 0.0012 inch greater than the upper limit J max. of the respective linear guide rail (see drawing), resulting from the manufacturer's directives.

The maximum holding force results at J max. and, in the most unfavorable case, holding force losses up to 30 % can occur (see table).

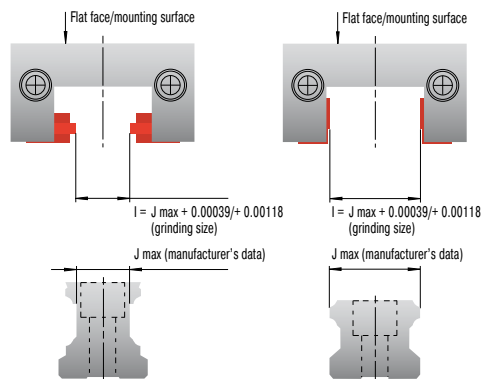

Air Gap Lining/Linear Guide Rail inch	Loss in Holding Force %
0.0004	5
0.0012	10
0.0020	20
0.0028	30

### Different brake pads for PL/PLK and for SL/SLK

The process clamps and safety clamps are available completely identical in their structure.

They differ only in the clamping and brake pads material.



Clamping



Braking

#### Position Clamping

The types of the LOCKED series PL and PLK are designed for clamping directly on the linear guide. The clamping linings are produced from tool steel and offer 100 % clamping force, even in the case of lubricated rails.

#### Position Clamping and Emergency Stop Braking

With the typical SL, SLK, low-wear sinter graphite linings are employed. These enable both a position clamping, as well as emergency stop braking on the linear guide. In case of lubricated rails, a stopping force of 60 % of the nominal stopping force should be considered.

## Rod Clamping

### The modular solution for exact holding at certain positions

Safe and reliable stopping at a position or an operating state is an important part of many production processes. This task can be performed by the clamping elements from ACE. If clamping on a rod is required, the clamping elements of the PN and PRK families are the right choice.


Thanks to the patented spring steel plate system the rod clamps transfer clamping forces of up to 6,070 lbs directly to the (piston) rod.

The PN and PRK rod clamps can absorb both axial and rotary forces.


### Function of clamping elements LOCKED PN and PRK

Consisting of a deck plate, one to four clamping units and a base plate, all rod clamps work with the reinforced spring steel plate system.

Through that, both axial and rotary forces can be absorbed.

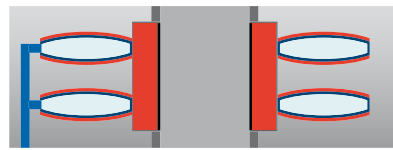

Clamping element is released

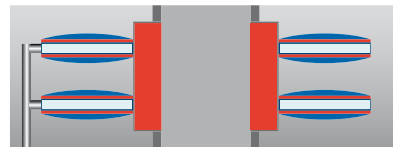

Clamping element is engaged

#### Released

The membrane filled with compressed air relaxes the spring steel plate system and releases the clamping sleeve.

#### Engaged

The clamping force of the mechanically pre-stressed spring steel plates system is transferred as a holding force into the clamping sleeve. The rod or shaft is engaged.

### Intelligent component system solution

By connecting up to four clamping units between the base and deck plates, it is possible to easily increase the clamping force.



Modular construction

### Component tolerances for LOCKED PN and PRK

Design-related, the addition of the individual component tolerances leads to an elastic axial tolerance allowance. This axial tolerance allowance can be up to 500 µm in the clamped status, according to implementation!

The axis/shaft/rod must be machined with at least h9-fit (or better) above h5. Deviations from the prescribed tolerance can lead to reduction of the stopping force, or functional failure.



Rod clamping

## Rotational Clamping

### The reliable protection against twisting

Reliable holding and securing against a rotation of a position are important elements in many production processes.

This task can be performed by means of the clamping elements of the Locked R family. The rotational clamps can, thanks to the patented spring steel plate system, transfer holding torques of up to 41,421 lbs to the shaft.

The spring accumulator can immediately clamp the axis during a power failure.

### Function of clamping elements LOCKED R

The reinforced spring steel plate system transfers holding torques in the shortest possible time.



Clamping element is released

#### Released

The membrane filled with compressed air relaxes the spring steel plate system and releases the clamping ring. The shaft is free to move.



Clamping element is engaged

#### Engaged

The clamping force of the membrane/spring steel plates systems is transferred to the holding force of the clamping ring. The shaft is clamped.

### Function of clamping elements LOCKED R-Z with additional air

If higher holding torques are required, the rotational clamps with an additional air function are used.

With the same size, significantly higher holding torques are achieved.



Increased clamping force with additional air

#### Engaged with additional air

By filling the outer membrane chamber with additional compressed air (58 or 87 psi), there is the possibility to increase the clamping force. The clamping element is engaged in this condition.



## Clamping Elements



### LOCKED PL

Process Clamping for Rail Systems

**High clamping power for all rail profiles**

Tool machines, Transport systems, Feeder installations,  
Positioning tables



### LOCKED PLK

Process Clamping for Rail Systems, Compact

**High clamping power for all compact design rail profiles**

Tool machines, Transport systems, Feeder installations,  
Positioning tables



### LOCKED SL

Safety Clamping for Rail Systems

**Combined clamping and braking**

Tool machines, Transport systems, Feeder installations,  
Positioning tables



### LOCKED SLK

Safety Clamping for Rail Systems, Compact

**Combined compact design clamping and braking**

Tool machines, Transport systems, Feeder installations,  
Positioning tables



### LOCKED LZ-P

Rail Clamping for Z-Axes

**Certified safety clamping**

Z-axes, Vertical conveyor systems, Jacking applications



### LOCKED PN

Pneumatic Rod Clamping

**Rod clamping with maximum clamping force**

Jacking systems, Light presses, Punching/stamping machines,  
Stacking units



### LOCKED PRK

Pneumatic Rod Clamping, Compact

**Rod clamping with maximum clamping force in a compact size**

Jacking systems, Light presses, Punching/stamping machines,  
Stacking units



### LOCKED R

Pneumatic Rotational Clamping

**Strong holding force on the shaft**

Drive shafts, Torque motors, Conveyor systems

## Application Examples

### SL

#### Special LOCKED SL elements for emergency stops

In order to secure the processing position of a special lathe in both the horizontal and the vertical axis, ACE LOCKED elements of the type SL35-1-6B are installed. They have the further advantage of preventing slippage through the vertical axis in the case of a malfunction. The products used in the SL-series not only have the correct track width and offer very high process clamping forces of up to 2,248 lbs, but can also apply the same force as an emergency-stop braking function. This is due to the specially integrated brake linings made of low-wear sintered metal.



ACE clamping and safety elements maintain a rock-solid hold on the axes in special lathes and secure the predetermined positions both horizontally and vertically

RASOMA Werkzeugmaschinen GmbH, 04720 Döbeln, Germany

### SLK

#### Secure rail clamping

ACE clamping elements secure machines in the tyre industry. The goods accumulator/compensator of a material dispenser carries meandering, coiled, highly tear resistant material strips, which are fed at high speed to a tyre-manufacturing machine. To prevent damaging the machine, innovative type SLK25-1-6B clamping elements are employed.




Secure material accumulator


**PN**

**Clamping elements as a variable stop**

ACE clamping elements are inserted, as a variable stop, during a joining process for the production of drilling tools. They meet the requirements for a precise positioning of the workpiece head and an adaptation of the length tolerance of up to 0.12 in, ideally. ACE was awarded the contract because the clamping element is attached on a bar and its PN LOCKED series is specifically designed for this purpose. For clamping on linear guides, rails, axles and shafts, ACE offers a great range of high-performance models.

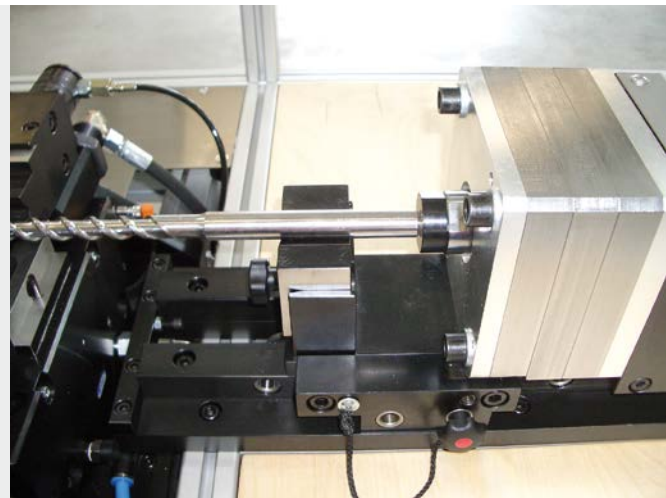


ACE clamping elements assist in the production of drilling tools: the LOCKED-P system clamps and at the same time absorbs the opposing forces of the joining process without difficulty  
 GRAF automation GmbH, 88214 Ravensburg, Germany

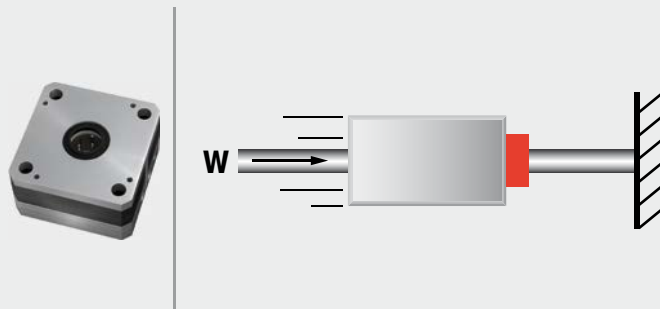

**PN**

**Secure rod clamping**

Pneumatic rod clamping allows hydraulic presses to be used for any application. With the help of hydraulic presses, cut ceramic parts are manufactured during the week. So that the rods of the upper and lower stamping plate do not sag when the press is at a standstill over the weekend or during holidays and to avoid having to be setup again on the next working day, PN80-25-2-6B rod clamps are used.

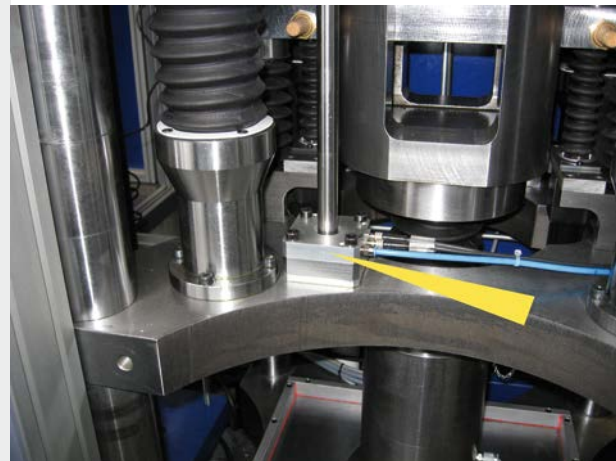

Pneumatic rod clamping allows hydraulic presses to be used for any application  
 KOMAGE Gellner Maschinenfabrik KG, 54427 Kell am See, Germany



Issue 04.2018 – Specifications subject to change

State	City	Distributor	Phone Number	Website
Alabama	Birmingham	Air Hydro Power	(205) 623-2215	www.airhydropower.com
Alaska	Anchorage Kodiak Woodinville, WA	Alaska Hydraulics Alaska Hydraulics Sun Source - Warden Fluid Dynamics	(907) 562-2217 (907) 486-5970 (800) 666-0382	www.alaskahydraulics.com www.alaskahydraulics.com www.sun-source.com
Arizona	Tempe Chandler	Barkley Fluid Power Sun Automation Inc.	(480) 968-7416 (480) 929-0464	www.barkleyfluidpower.com www.sunautomationinc.com
Arkansas	Little Rock Fort Smith	Centro, Inc. Franklin Automation Inc.	(855) 223-6876 (479) 646-7448	www.centro-online.com www.franklinautomation.com
California	Campbell Santa Ana San Jose Los Angeles San Diego	Clayton Controls Inc. Clayton Controls Inc. - HQ Nor-Cal Controls Inc. Provoast Automation Controls Provoast Automation Controls	(800) 341-4445 (800) 235-4411 (800) 233-2013 (714) 996-9417 (858) 748-2237	www.claycon.com www.claycon.com www.norcal4air.com www.proautocon.com www.proautocon.com
Colorado	Englewood	AAP Automation	(303) 778-0800	www.aapautomation.com
Connecticut	Bloomfield Worcester, MA Wakefield, MA	Pearse-Bertram, LLC Kinepower (KiniFac Corp) Minuteman Controls	(800) 677-1911 (508) 754-6901 (781) 245-9550	www.pearse-bertram.com www.kinepower.com www.maseas.com
Delaware	Souderton, PA Maplewood, NJ Broomall, PA York, PA	Air-Oil Systems Inc. Airoyal Co., Inc. Rankin Automation RG Group	(215) 721-9595 (973) 761-4150 (610) 544-6800 (717) 849-0320	www.airoil.com www.airoyal.biz www.rankinautomation.com www.rg-group.com
Florida	Oldsmar Tampa Birmingham, AL	Braas Co. Gulf Controls Corp. Air Hydro Power	(813) 855-4425 (813) 884-0471 (205) 623-2215	www.braasco.com www.gulfcontrols.com www.airhydropower.com
Georgia	Stone Mountain Conyers	TSI Solutions Georgia Automation	(770) 879-3500 (770) 388-7300	www.4tsi.com www.georgiaautomation.com
Hawaii	Santa Ana, CA	Clayton Controls	(800) 235-4411	www.claycon.com
Idaho	Boise	SunSource - Warden Fluid Dynamics	(866) 323-4767	www.sun-source.com
Illinois	Elk Grove Fenton, MO Hanover Park St. Louis, MO	FPE Automation Inc. Air Specialist Worldwide Inc. CMA/Flodyne/Hydradyne Inc. John Henry Foster Co.	(847) 364-7455 (636) 326-5900 (630) 563-3600 (314) 427-0600	www.fpeinc.com www.airspec.com www.cmath.com www.jhf.com
Indiana	Indianapolis South Bend Fort Wayne	Neff Indianapolis Neff South Bend Neff Fort Wayne	(317) 841-9244 (574) 272-8282 (260) 489-6007	www.neffautomation.com www.neffautomation.com www.neffautomation.com
Iowa	Merriam, KS Omaha, NE Eden Prairie, MN	IBT, Inc. Skarda Equipment Co., Inc. Hartfiel Automation	(913) 677-3151 (402) 422-0430 (952) 974-2500	www.ibtinc.com www.skarda.com www.hartfiel.com
Kansas	Merriam Omaha, NE Eden Prairie, MN	IBT, Inc. Skarda Equipment Co., Inc. Hartfiel Automation	(913) 677-3151 (402) 422-0430 (952) 974-2500	www.ibtinc.com www.skarda.com www.hartfiel.com
Kentucky	Louisville West Chester, OH	Air Hydro Power Henry M. Wood	(502) 451-1000 (513) 755-4060	www.airhydropower.com www.henrymwood.com
Louisiana	Broussard Shreveport Memphis, TN	Hydraquip Centro Franklin Automation	(337) 837-4114 (318) 221-2347 (901) 362-7504	www.hydraquip.com www.centrosolves.com www.franklinautomation.com
Maine	Bloomfield, CT Worcester, MA Wakefield, MA	Pearse-Bertram, LLC Kinepower (KiniFac Corp) Minuteman Controls	(800) 677-1911 (508) 754-6901 (781) 245-9550	www.pearse-bertram.com www.kinepower.com www.maseas.com
Maryland	Baltimore Souderton, PA Fredericksburg, VA Broomall, PA York, PA	Airoyal Co., Inc. Air-Oil Systems Inc. Hartfiel Automation Rankin Automation RG Group	(866) 247-6645 (215) 721-9595 (540) 898-4511 (610) 544-6800 (717) 849-0320	www.airoyal.biz www.airoil.com www.advpneumatics.com www.rankinautomation.com www.rg-group.com
Massachusetts	Worcester Wakefield Bloomfield, CT	Kinepower (KiniFac Corp) Minuteman Controls Pearse-Bertram, LLC	(508) 754-6901 (781) 245-9550 (800) 677-1911	www.kinepower.com www.maseas.com www.pearse-bertram.com
Michigan	Grand Rapids Farmington Hills Hudsonville Grand Rapids Flint Flint	Bond Fluidaire Exotic Auto & Supply MFP Automation Engineering Neff Grand Rapids Neff Flint RG Kenrick Co., Inc.	(616) 942-1060 (248) 477-2122 (616) 538-5700 (616) 554-1974 (810) 232-9350 (810) 733-7440	www.bondfluidaire.com www.exoticautomation.com www.mfp.com www.neffautomation.com www.neffautomation.com www.rgkenrick.com
Minnesota	Eagan Eden Prairie Eden Prairie	John Henry Foster Braas Co. Hartfiel Automation	(651) 452-8452 (800) 288-6628 (952) 974-2500	www.jhfoster.com www.braasco.com www.hartfiel.com
Mississippi	Little Rock, AR Memphis, TN	Centro Inc. Franklin Automation Inc.	(855) 223-6876 (630) 466-1900	www.centro-online.com www.franklinautomation.com
Missouri	Fenton St. Louis Merriam, KS	Air Specialist Worldwide Inc. John Henry Foster Co. IBT, Inc.	(636) 326-5900 (314) 427-0600 (913) 677-3151	www.airspec.com www.jhf.com www.ibtinc.com
Montana	Spokane Valley, WA	SunSource - Warden Fluid Dynamics	(800) 234-8265	www.sun-source.com
Nebraska	Omaha Merriam, KS	Skarda Equipment Co., Inc. IBT, Inc.	(402) 422-0430 (913) 677-3151	www.skarda.com www.ibtinc.com
Nevada	Campbell, CA Santa Ana, CA San Jose, CA Los Angeles, CA	Clayton Controls Inc. Clayton Controls Inc. Nor-Cal Controls Inc. Provoast Automation Controls	(800) 341-4445 (800) 235-4411 (800) 233-2013 (714) 996-9417	www.claycon.com www.claycon.com www.norcal4air.com www.proautocon.com
New Hampshire	Bloomfield, CT Worcester, MA Wakefield, MA	Pearse-Bertram, LLC Kinepower (KiniFac Corp) Minuteman Controls	(800) 677-1911 (508) 754-6901 (781) 245-9550	www.pearse-bertram.com www.kinepower.com www.maseas.com



State	City	Distributor	Phone Number	Website
<b>New Jersey</b>	Maplewood Broomall, PA York, PA	Airoyal Co., Inc. Rankin Automation RG Group	(973) 761-4150 (610) 544-6800 (717) 849-0320	www.airoyal.biz www.rankinautomation.com www.rg-group.com
<b>New Mexico</b>	Tempe, AZ	Barkley Fluid Power	(480) 968-7416	www.barkleyfluidpower.com
<b>New York</b>	Syracuse  Rochester	Ralph W. Earl Co, Inc. Airoyal Co., Inc. Empire Automation	(315) 454-4431 (973) 761-4150 (585) 352-3333	www.rwearl.com www.airoyal.biz www.maseas.com
<b>North Carolina</b>	Concord Concord	Automation Technology Inc. Hartfiel Automation	(704) 784-8101 (704) 788-1240	www.automationtechnologyinc.com www.hartfiel.com
<b>North Dakota</b>	Eagan, MN Eden Prairie, MN	John Henry Foster Braas Co.	(651) 452-8452 (800) 288-6628	www.jhfoster.com www.braasco.com
<b>Ohio</b>	Westlake West Chester Bath Franklin Fairfield	Neff Engineering Henry M. Wood Mann Fluid Power Voelker Controls Co. JWF Technologies	(440) 835-7010 (513) 755-4060 (330) 659-6671 (800) 686-4762 (513) 769-9611	www.neffautomation.com www.henrymwood.com www.mannfluidpower.com www.voelker-controls.com www.jwftechnologies.com
<b>Oklahoma</b>	Allen, TX	Shepherd Controls Hydraquip Southwestern Controls	(972) 727-7300 (713) 680-1951 (214) 638-4266	www.shepherdcontrols.com www.hydraquip.com www.southwesterncontrols.com
<b>Oregon</b>	Portland Vancouver, WA	Northwest Automation Products SunSource - Warden Fluid Dynamics	(503) 620-5670 (800) 444-4946	www.northwestpneumatics.com www.sun-source.com
<b>Pennsylvania</b>	Souderton  Warrendale Warrendale Aliquippa Broomall York Fairfield	Air-Oil Systems Inc. Airoyal Co., Inc. Huston Industrial Sales, Inc. Neff Pennsylvania Pennsylvania Controls Rankin Automation RG Group JWF Technologies	(215) 721-9595 (973) 761-4150 (724) 935-5666 (724) 776-5669 (724) 378-9454 (610) 544-6800 (717) 849-0320 (513) 769-9611	www.airoil.com www.airoyal.biz www.hustonind.com www.neffautomation.com www.4pacco.com www.rankinautomation.com www.rg-group.com www.jwftechnologies.com
<b>Rhode Island</b>	Bloomfield, CT Worcester, MA Wakefield, MA	Pearse-Bertram, LLC Kinepower (KiniFac Corp) Minuteman Controls	(800) 677-1911 (508) 754-6901 (781) 245-9550	www.pearse-bertram.com www.kinepower.com www.maseas.com
<b>South Carolina</b>	Concord, NC Concord, NC	Automation Technology Inc. Hartfiel Automation	(704) 784-8101 (704) 788-1240	www.automationtechnologyinc.com www.hartfiel.com
<b>South Dakota</b>	Eagan, MN Eden Prairie, MN	John Henry Foster Braas Co.	(651) 452-8452 (800) 288-6628	www.jhfoster.com www.braasco.com
<b>Tennessee</b>	Memphis Memphis Knoxville Dickson	Centro Inc. Franklin Automation Inc. Leinart's Inc. Modern Automation	(901) 357-1261 (901) 362-7504 (865) 525-0363 (615) 446-1990	www.centrosolves.com www.franklinautomation.com www.leinarts.net www.modernaautomation.com
<b>Texas</b>	El Paso Allen	Itech Automation Solutions Shepherd Controls Southwestern Controls Hydraquip	(915) 599-3022 (972) 727-7300 (214) 638-4266 (713) 680-1951	www.itechelpaso.com www.shepherdcontrols.com www.southwesterncontrols.com www.hydraquip.com
<b>Utah</b>	Murray	AAP Automation	(801) 207-2400	www.aapautomation.com
<b>Vermont</b>	Bloomfield, CT Worcester, MA Wakefield, MA	Pearse-Bertram, LLC Kinepower (KiniFac Corp) Minuteman Controls	(800) 677-1911 (508) 754-6901 (781) 245-9550	www.pearse-bertram.com www.kinepower.com www.maseas.com
<b>Virginia</b>	Fredericksburg Roanoke	Hartfiel Automation Maxim Systems, Inc.	(540) 898-4511 (540) 265-9050	www.advpneumatics.com www.maximsystems.net
<b>Washington</b>	Kent Spokane Valley Vancouver Woodinville Portland, OR	Northwest Automation Products SunSource - Warden Fluid Dynamics SunSource - Warden Fluid Dynamics SunSource - Warden Fluid Dynamics Northwest Automation Products	(425) 251-9995 (800) 234-8265 (800) 444-4946 (800) 666-0382 (503) 620-5670	www.northwestpneumatics.com www.sun-source.com www.sun-source.com www.sun-source.com www.northwestpneumatics.com
<b>West Virginia</b>	Fredericksburg	Hartfiel Automation	(540) 898-4511	www.advpneumatics.com
<b>Wisconsin</b>	Mequon	NEFF - Wisconsin	(262) 834-6300	www.neffautomation.com
<b>Wyoming</b>	Englewood, CO	AAP Automation	(303) 778-0800	www.aapautomation.com

**CANADA**

<b>Alberta &amp; Northwest Territories</b>	Edmonton	Peerless Engineering	(780) 439-3322	www.peerlessengineering.com
<b>British Columbia &amp; Yukon Territory</b>	Burnaby Prince George	Peerless Engineering - HQ	(604) 659-4100 (250) 563-2130	www.peerlessengineering.com www.peerlessengineering.com
<b>Ontario, Quebec &amp; Maritimes</b>	Lachine, Quebec Brantford, Ontario	Cowper Incorporated ASCO	(888) 506-1111 (519) 758-2700	www.cowper.ca www.asco.com/en-ca
<b>Saskatchewan</b>	Prince Albert	Peerless Engineering	(306) 763-4465	www.peerlessengineering.com

**CENTRAL AMERICA**

<b>Costa Rica</b>	San José	Grupo Kopar	(506) 2290-6905	www.kopar.com.mx
<b>Mexico</b>	Monterrey Tijuana	Grupo Kopar Provoast Automation Controls	(81) 8000-2000 (664) 647-3363	www.kopar.com.mx www.proautocon.com
<b>Puerto Rico &amp; Dominican Republic</b>	San Juan, PR	Rafael Benitez Carrillo, Inc./ Applied Industries	(787) 751-7500	www.applied.com/international-puertorico

**ACE Controls Inc.**  
The shortest way to the perfect shock absorber



**ACE Controls International Inc.**

23435 Industrial Park Drive  
Farmington Hills, Michigan 48335  
USA

T +1 (248) - 476-0213  
F +1 (248) - 476-2470



[shocks@acecontrols.com](mailto:shocks@acecontrols.com)  
[www.acecontrols.com](http://www.acecontrols.com)

**Global but always near**  
**International ACE Sales Locations**




GERMANY  
**ACE Stoßdämpfer GmbH**  
Albert-Einstein-Straße 15  
40764 Langenfeld, Germany  
T +49 (0)2173 - 9226-4100  
F +49 (0)2173 - 9226-89  
[www.ace-ace.com](http://www.ace-ace.com)



GREAT BRITAIN  
**ACE Fabreeka UK**  
Unit 404 Easter Park, Haydock Lane  
Haydock, WA11 9TH, U.K.  
T +44 (0)1942 - 727 440  
F +44 (0)1942 - 717 273  
[www.ace-controls.co.uk](http://www.ace-controls.co.uk)



JAPAN  
**ACE Controls Japan L.L.C.**  
City Center Bldg. II 2fl  
3-1-42, Chigasaki-minami, Tsuzuki-ku  
Yokohama, 224-0037, Japan  
T +81 (0)45 - 945-0123  
F +81 (0)45 - 945-0122  
[www.acecontrols.co.jp](http://www.acecontrols.co.jp)

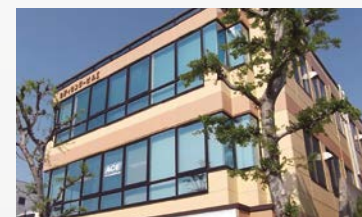

P.R. CHINA  
**ACE Controls**  
No. 8 Longxiang Road, Wujin National High-tech Industrial Zone,  
Changzhou, Jiangsu Province, CN-213164, P. R. China  
T +86 (0)519 - 8622-3520  
F +86 (0)519 - 8622-3550  
[www.ace-ace.cn](http://www.ace-ace.cn)

